

Name \_\_\_\_\_ Date \_\_\_\_\_ Track / City \_\_\_\_\_ Event \_\_\_\_\_

### Front Suspension:

#### Shock Position:



#### Shock Stay:

- Std.
- Carbon (LAW58)
- Other \_\_\_\_\_

#### Lower Sus Holder Block:


Front \_\_\_\_\_ Rear \_\_\_\_\_

#### Lower Sus Holder Spacer:

Front \_\_\_\_\_ mm Rear \_\_\_\_\_ mm

Comments: \_\_\_\_\_

#### Upper Arm Position:




#### 4.8mm Ball Stud:

- 97050M(Std)
- UM129

#### Upper Spacer: \_\_\_\_\_ mm

#### Camber \_\_\_\_\_°

#### Spacer: \_\_\_\_\_ mm

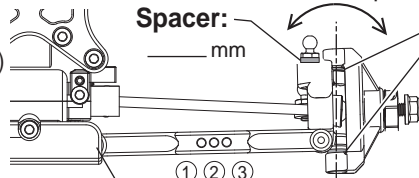


#### Shock Position:

Wheelbase: Front \_\_\_\_\_ mm

Rear \_\_\_\_\_ mm

#### Bump Steer Spacer: \_\_\_\_\_ mm



#### Toe:

- In \_\_\_\_\_°
- Out \_\_\_\_\_°

#### Sway Bar:

- None
- \_\_\_\_\_ mm

#### Ackerman Spacer: \_\_\_\_\_ mm



#### Axle-Height Spacer:

- Up
- Down

#### Caster Block:

- 7°
- 10°

#### Stiffener:


- Std.
- Carbon Comp. (LAW52)

#### Front Diff:

- Gear Diff. # \_\_\_\_\_
- Ball Diff. \_\_\_\_\_

### Rear Suspension:

#### Shock Position:



#### Shock Stay:

- Std.
- Carbon (LAW59)
- Other \_\_\_\_\_

#### Wing Stay Position:

#### Lower Sus Holder Block:


Front \_\_\_\_\_ Rear \_\_\_\_\_

#### Lower Sus Holder Spacer:

Front \_\_\_\_\_ mm Rear \_\_\_\_\_ mm

Comments: \_\_\_\_\_

#### Upper Arm Position:



#### 4.8mm Ball Stud:

- 97050M(Std)
- UM129


#### Upper Spacer: \_\_\_\_\_ mm

#### Toe In: \_\_\_\_\_°

#### Sus. Arm:

- LA272(Std)
- UM713B

#### Camber \_\_\_\_\_°

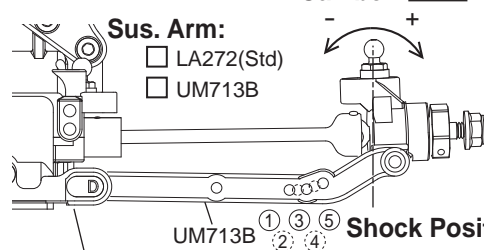

#### Wheelbase:

Front \_\_\_\_\_ mm

Rear \_\_\_\_\_ mm


#### Stiffener:

- Std.
- Carbon Comp. (LAW53)

#### Hub Carrier:

- Type-B (UM519)
- Type-B2 (UM519-2)

#### Upper Spacer: \_\_\_\_\_ mm



- 0°Type-B(UM519)
- 0°Type-B2(UM519-2)
- 0°Alu(UMW704-0)
- 0.5°Alu(UMW704-05)
- 1°Alu(UMW704-1)

#### Sway Bar:

- None
- \_\_\_\_\_ mm

#### Center Plate:

- Std.
- Aluminum (LAW55)

#### Rear Diff:

- Gear Diff. # \_\_\_\_\_
- Ball Diff. \_\_\_\_\_

### Shock:

#### Front

#### Rear

#### Shock Piston: \_\_\_\_\_

#### Shock Oil: # \_\_\_\_\_ # \_\_\_\_\_

#### Shock Spring: \_\_\_\_\_

#### Limiters:


|     |    |     |    |
|-----|----|-----|----|
| in  | mm | in  | mm |
| out | mm | out | mm |

#### Shock Length (A): \_\_\_\_\_ mm \_\_\_\_\_ mm

#### Shock Top Type: Alu. (UM719/Std) UM753-1


#### 5.8mm Ball End:

- |        |                            |                            |                            |
|--------|----------------------------|----------------------------|----------------------------|
| Front: | <input type="checkbox"/> S | <input type="checkbox"/> M | <input type="checkbox"/> L |
| Rear:  | <input type="checkbox"/> S | <input type="checkbox"/> M | <input type="checkbox"/> L |



### Chassis:

#### Ride Height:

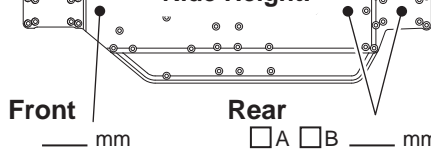

#### Front \_\_\_\_\_ mm

#### Rear

A  B \_\_\_\_\_ mm

#### Tire:

#### Front

#### Rear

Tire: \_\_\_\_\_

Compound: \_\_\_\_\_

Inserts: \_\_\_\_\_

Wheel: \_\_\_\_\_

Note: \_\_\_\_\_

### Electronics:

- #### Battery:
- Saddle Pack
  - Short

- #### Motor Position:
- Front
  - Rear

- #### Servo Mounting:
- Straight
  - Sideways
  - Aluminum (LAW56)

- #### Motor Mount Position:
- Std
  - 8mm Front

- #### Battery Position:
- Std
  - 8mm Front

Motor: \_\_\_\_\_

Pinion / Spur: \_\_\_\_\_

ESC: \_\_\_\_\_

### Body / Wing:

#### Body:

#### Wing Mount:

#### Wing Dum Height: \_\_\_\_\_ mm

- Narrow
- Wide

#### Wing:

#### Wing Angle:

#### Lip Height: \_\_\_\_\_ mm

- 4°
- 7°
- 10°

### Material:

- #### Screw:
- Steel
  - Titanium

- #### Pinion Gear:
- Steel
  - Aluminum

- #### Shock O-Ring:
- O-ring
  - X-ring
  - Red
  - Clear

### Track Condition

- Smooth
- Bumpy
- Low Traction
- Med. Traction
- Higt Traction
- Wet
- Dry
- Sandy
- Soft Dirt
- Grass
- Blue Groove
- Clay
- Dusty
- \_\_\_\_\_