


Name Kohta AKimoto Date 15/06/07 Truck / City YATABE ARENA Event Pre world & JMRCA

### Front Suspension:


#### Shock Position:



Lower Sus Holder Block:  
Front A Rear A  
Lower Sus Holder Spacer:  
Front 0.5 mm Rear 0.5 mm


Comments:

#### Upper Arm Position:




4.8mm Ball Stud:  
 97050M(Std)  
 UM129

Upper Spacer: 0 mm  
Camber 2.5 °

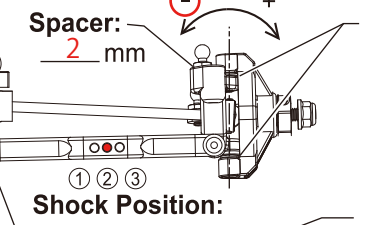

Spacer: 2 mm  
Shock Position: 1 2 3

Bump Steer Spacer: 1 mm



Toe:  
 In  
 Out 0.5 °

Sway Bar:  
 None  
 2.0 mm (Proto type)

Ackerman Spacer: 0 mm

Axle-Height Spacer:  
 Up  
 Down

Caster Block:  
 7°  
 10°

Wheelbase:  
Front 0 mm  
Rear 1 mm

### Front Diff:

Gear Diff. # 10000  
 Ball Diff.

### Rear Suspension:


#### Shock Position:



Lower Sus Holder Block:  
Front Out B Rear Out F  
Lower Sus Holder Spacer:  
Front 0.5 mm Rear 0.5 mm


Comments:

#### Upper Arm Position:



4.8mm Ball Stud:  
 97050M(Std)  
 UM129


Upper Spacer: 0.5 mm

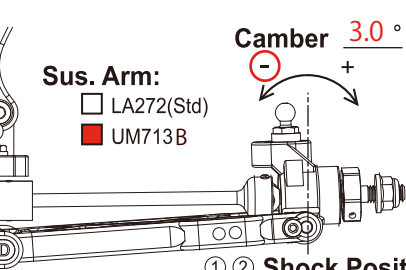

Sus. Arm:  
 LA272(Std)  
 UM713B

Toe In: 2.0 °

#### Hub Carrier:



Upper Spacer: 2 mm

0°Type-B(UM519)  
 0°Type-B2(UM519-2)  
 0°Alu(UMW704-0)  
 0.5°Alu(UMW704-05)  
 1°Alu(UMW704-1)

Sway Bar:  
 None  
 2.0 mm (Proto type)


Wheelbase:  
Front: 4 mm Front: 2 mm  
Rear: 0 mm Rear: 0 mm

### Rear Diff:

Gear Diff. # 10000  
 Ball Diff.


### Shock:

	Front	Rear
Shock Piston:	<u>2x1.6</u>	<u>2x1.6</u> ※W5303-09
Shock Oil:	# <u>550</u>	# <u>500</u>
Shock Spring:	<u>Red</u>	<u>Red</u>
Limiters:	in <u>0</u> mm out <u>0</u> mm	in <u>0</u> mm out <u>0</u> mm
Shock Length(A):	<u>19.0</u> mm	<u>28.0</u> mm
Shock Top Type:	<input checked="" type="checkbox"/> Alu(UM719/Std) <input type="checkbox"/> UM753-1	
5.8mm Ball End:	Front: <input type="checkbox"/> S <input type="checkbox"/> M <input type="checkbox"/> L Rear: <input type="checkbox"/> S <input type="checkbox"/> M <input type="checkbox"/> L	



### Chassis:

#### Ride Height:

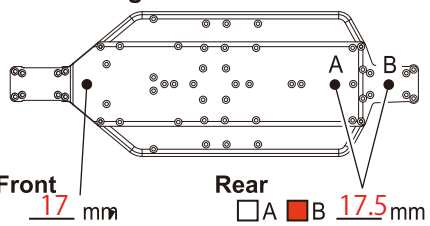

Front 17 mm Rear  A  B 17.5 mm

#### Tire:

	Front	Rear
Tire:	<u>U6810</u>	<u>U6558</u>
Inserts:	<u>U6733</u>	<u>U6734</u>
Wheel:	<u>W5201W</u>	<u>W5202W</u>
Traction Compound:		

### Electronics:

Battery:  Saddle Pack  
 Short

Motor Position:  Front  
 Rear

Servo Mounting:  Straight  
 Sideways

Motor: ORION VST2 5.5T LW

Motor Timing: \_\_\_\_\_

Pinion/Spur: 18/78

ESC: Much more FLETA PRO

Radio: FUTABA 4PX

Servo: FUTABA BLS471SV

### Body / Wing:

Body: LAB06LW Wing Mount:  Narrow  Wide Wing Dum Height: 20.0 mm

Wing: Step 3.0 Round Wing Angle:  4°  7°  10° Lip Height: 0 mm

### Material:

Screw:  Steel  Titanium

Pinion Gear:  Steel  Aluminium

Shock O-Ring:  O-ring  X-ring  Red  Clear

Comment : ※LAW50 Gear Diff set  
※LAW52 Carbon Composite Front Stiffener Set  
※LAW53 Carbon Composite Rear Stiffener Set  
※LAW54 Aluminum HD Main Chassis Conversion Set