


Name Karlos Date 6.11.16 Track / City Workshop Event Rd3 Winter Series

Front Suspension:

Shock Position:



Lower Sus Holder Block:


Front A Rear A

Lower Sus Holder Spacer:

Front 0.5 mm Rear 0.5 mm

Comments: _____

Upper Arm Position:



4.8mm Ball Stud:


97050M(Std)

UM129

Upper Spacer: 0.5 mm

Camber -1°

Spacer: 2 mm

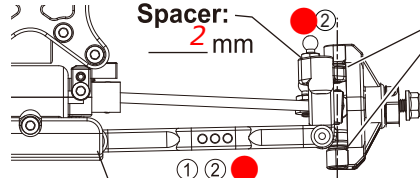

Shock Position:

Axle-Height Spacer:

Up

Down

Caster Block:

7°

10°

Wheelbase:

Front 0 mm

Rear 1 mm

Bump Steer Spacer:

2 mm

Toe:

In

Out 1°

Sway Bar:

None

1.4 mm

Ackerman Spacer:

0 mm

Front Diff:

Gear Diff. # 3K

Ball Diff.

Rear Suspension:

Shock Position:



Lower Sus Holder Block:


Front B in Rear F out

Lower Sus Holder Spacer:

Front 2 pip mm Rear 1 pip mm

Comments: _____

Upper Arm Position:



4.8mm Ball Stud:

97050M(Std)

UM129

Upper Spacer: 2 mm


Camber -1°

Sus. Arm:

LA272(Std)

UM713

UM713B

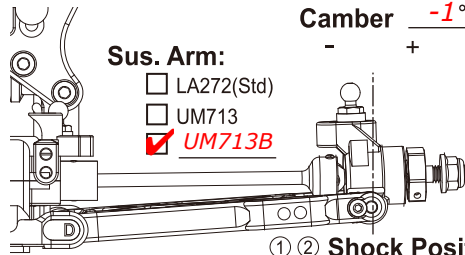

Shock Position:

Hub Carrier:

Type-B (UM519)

Type-B2 (UM519-2)

Upper Spacer: 1.5 mm

Wheelbase:

Front: 4 mm

Rear: 0 mm

Slipper Type:

Separates Direct

0°Type-B(UM519)

0°Type-B2(UM519-2)

0°Alu(UMW704-0)

0.5°Alu(UMW704-05)

1°Alu(UMW704-1)

Sway Bar:

None

1.7 mm

Rear Diff:

Gear Diff. # 3k

Ball Diff.

Shock:

Shock Piston: 3 hole 1.5

Rear 3 hole 1.6

Shock Oil: # 32.5 Asso

32.5 Asso

Shock Spring: Red Asso

Blue Asso

Limiters: in 0 mm

in 0 mm

out 0 mm

out 0 mm

Shock Length(A): 19 mm


28.5 mm

Shock Top Type: Alu(UM719/Std) UM753-1

5.8mm Ball End:


Front: S M L

Rear: S M L



Chassis:

Ride Height:

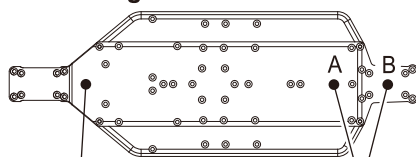

Front 17 mm

Rear A B 17 mm

Tire:

Front

Rear

Tire: Mini Pin 2

Mini Pin 2

Compound: Yellow

Yellow

Inserts: Schy

Schy

Wheel: Kyosho

Kyosho

Notes: _____

Comment:

Unable to try more droop as at maximum. Car was on pace with this set up so great starting point next time!
C/F Towers
Wide Hex fitted ALL round
Alloy Chassis Brace fitted
Will try 5.5 motor next time

Electronics:

Battery: Saddle Short

Motor Position: Front

Rear

Servo Mounting: Straight

Sideways

Motor: VST2 6.5

Motor Timing: std

Pinion/Spur: 24/78

ESC: R10.1

Setting: _____

Radio: Sanwa

Servo: Orion 1605

Smooth

Sandy

Bumpy

Soft Dirt

Low Traction

Grass

Med.Traction

BlueGroove

High Traction

Clay

Wet

Dusty

Dry

rubber floor

Body / Wing:

Body:

Std

Wing Mount:

Narrow Wide

Wing Dum Height:

_____ mm

Wing:

3.0

Wing Angle:

4° 7° 10°

Lip Height:

12 mm

Material:

Screw: Steel Titanium

Pinion Gear: Steel Aluminium

Shock O-Ring: O-ring X-ring Red Clear