


Name Lee Romang Date 26/6/16 Track / City A1 Raceway Event Mid East Regional

### Front Suspension:

#### Shock Position:



#### Lower Sus Holder Block:


Front a Rear a

#### Lower Sus Holder Spacer:

Front 0.5 mm Rear 0.5 mm

Comments: carbon shock tower

#### Upper Arm Position:



#### 4.8mm Ball Stud:

- 97050M(Std)  
 UM129

Upper Spacer: 1 mm

Camber 2°

-

+

#### Spacer:

0 mm

#### Axle-Height Spacer:

- Up  
 Down

#### Caster Block:

- 7°  
 10°

#### Bump Steer Spacer:

0 mm

#### Toe:


- In 1°  
 Out

#### Sway Bar:

- None  
 1.8 mm

#### Ackerman Spacer:

0 mm

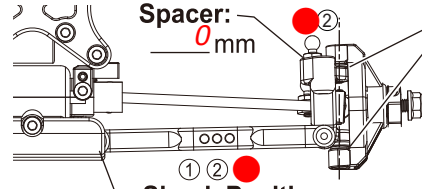

#### Shock Position:

#### Wheelbase:

Front 2 mm

Rear \_\_\_\_\_ mm

### Front Diff:

- Gear Diff. # 5000  
 Ball Diff.

### Rear Suspension:

#### Shock Position:



#### Lower Sus Holder Block:


Front b Rear f

#### Lower Sus Holder Spacer:

Front 2 mm Rear 1 mm

Comments: carbon rear tower

#### Upper Arm Position:



#### 4.8mm Ball Stud:

- 97050M(Std)  
 UM129

Upper Spacer: 1 mm

Camber 2°


-

+

#### Sus. Arm:

- LA272(Std)  
 UM713  
 \_\_\_\_\_

#### Hub Carrier:




Upper Spacer: 2 mm

- 0°Type-B(UM519)  
 0°Type-B2(UM519-2)  
 0°Alu(UMW704-0)  
 0.5°Alu(UMW704-05)  
 1°Alu(UMW704-1)  
 \_\_\_\_\_

#### Sway Bar:

- None  
 1.9 mm

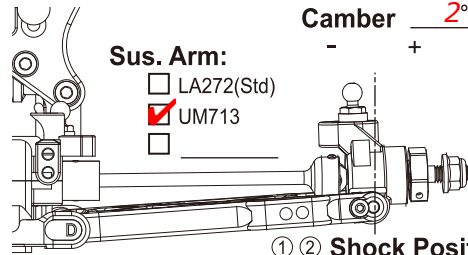


#### Shock Position:

#### Wheelbase:

Front: \_\_\_\_\_ mm

Rear: 4 mm

Toe In: 3°



### Shock:

Shock Piston: Front 2 x 1.6 Rear 2 x 1.7

Shock Oil: # 500 # 300

Shock Spring: AE Orange AE grey


Limiters: in mm out mm in mm out mm

Shock Length(A): 20.5 mm 27.5 mm

Shock Top Type:  Alu(UM719/Std)  UM753-1


5.8mm Ball End: Front:  S  M  L

Rear:  S  M  L



### Chassis:

#### Ride Height:

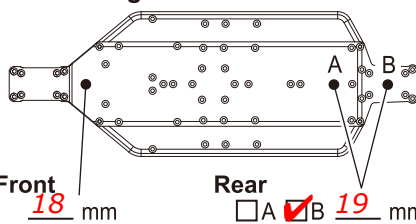

Front 18 mm

Rear  A  B 19 mm

Tire: Front Rear

Tire: mini spike mini spike

Compound: y y

Inserts: med med

Wheel: kit kit

Notes: \_\_\_\_\_

Comment: \_\_\_\_\_

Using HD chassis

Editable by Arn0 at PetitRC.com

### Electronics:

Battery:  Saddle  Short

Motor Position:  Front  
 Rear

Servo Mounting:  Straight  
 Sideways

Motor: 5.5

Motor Timing: \_\_\_\_\_

Pinion/Spur: 19/78

ESC: \_\_\_\_\_

Setting: \_\_\_\_\_

Radio: \_\_\_\_\_

Servo: \_\_\_\_\_

- Smooth  Sandy  
 Bumpy  Soft Dirt  
 Low Traction  Grass  
 Med.Traction  BlueGroove  
 High Traction  Clay  
 Wet  Dusty  
 Dry  astro

### Body / Wing:

Body: \_\_\_\_\_ Wing Mount:  Narrow  Wide Wing Dum Height: \_\_\_\_\_ mm

Wing: \_\_\_\_\_ Wing Angle:  4°  7°  10° Lip Height: \_\_\_\_\_ mm

### Material:

Screw:  Steel  Titanium

Pinion Gear:  Steel  Aluminium

Shock O-Ring:  O-ring  X-ring  Red  Clear