


Name Nick Caro Date 12th June Track / City Eden Park Raceway Event BRCA National Rd3

Front Suspension:

Shock Position:



Upper Arm Position:



4.8mm Ball Stud:

- 97050M(Std)
 UM129

Upper Spacer: 0.5 mm

Camber -1°

Bump Steer Spacer:

0 mm

Toe:


- In
 Out 1°

Sway Bar:

- None
 1.6 mm

Ackerman Spacer:

1 mm

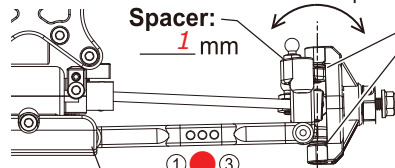

Spacer: 1 mm

Axle-Height Spacer:

- Up
 Down

Caster Block:

- 7°
 10°

Shock Position:

Wheelbase:

Front 0 mm

Rear 1 mm

Lower Sus Holder Block:

Front A Rear A

Lower Sus Holder Spacer:

Front 0.5 mm Rear 0.5 mm

Comments: Inside Camber link hole on hub

Front Diff:

Gear Diff. # 5k

Ball Diff.

Rear Suspension:

Shock Position:



Upper Arm Position:



4.8mm Ball Stud:

- 97050M(Std)
 UM129


Upper Spacer: 0.5 mm

Camber -1°

Sus. Arm:

- LA272(Std)
 UM713

Hub Carrier:




- 0°Type-B(UM519)
 0°Type-B2(UM519-2)
 0°Alu(UMW704-0)
 0.5°Alu(UMW704-05)
 1°Alu(UMW704-1)

Upper Spacer: 2 mm

Sway Bar:

- None
 1.8 mm

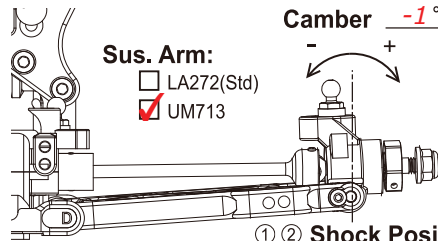

UM713

Shock Position:

Wheelbase:

Front: 2 mm

Rear: 2 mm

Lower Sus Holder Block:

Front B-in Rear E-out

Lower Sus Holder Spacer:

Front 2 pip mm Rear 1 pip mm

Comments: 2.5deg inboard + 0.5 Hubs (3deg) UM713B Wishbones New inside hole

Slipper Type:

- Separates Direct

Rear Diff:

Gear Diff. # 3k

Ball Diff.

Shock:

Front

Rear

Shock Piston: Big Bore 3 Hole (3 x 1.5mm) Big Bore 3 Hole (3 x 1.6mm)

Shock Oil: # 30wt # 27.5wt


Shock Spring: X-Gear GOLD/M #70 X-Gear GOLD/M #70

Limiters: in mm out mm in mm out mm

Shock Length(A): 20 mm 27 mm


Shock Top Type: Alu(UM719/Std) UM753-1

5.8mm Ball End:
Front: S M L
Rear: S M L



Chassis:

Ride Height:

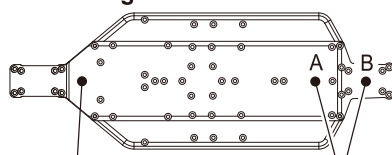

Front 20 mm

Rear A B 21 mm

Tire:

Front Rear

Tire: 4wd Mini Spike Mini Spike

Inserts: Schu Med Schu Med

Wheel: Kit Kit

Traction Compound: Silver

Electronics:

Battery: Saddle Short

Motor Position: Front

Rear

Servo Mounting: Straight

Sideways

Motor: VST2 6.5

Motor Timing: _____

Pinion/Spur: 78 / 22

ESC: Orion R10

Setting: _____

Radio: Sanwa Exzes

Servo: Futaba

Body / Wing:

Body: Kit Wing Mount: Narrow Wide Wing Dum Height: _____ mm

Wing: Step 3.0 Wing Angle: 4° 7° 10° Lip Height: _____ mm

Material:

Screw: Steel Titanium

Pinion Gear: Steel Aluminium

Shock O-Ring: O-ring X-ring Red Clear

Comment: *Editable by Arn0 at PetitRC.com*

Using UM713B Rear RB6 Wishbones, 3 hole side inside hole, Spaced back 2mm UMW523 Wide Rear Hexes

- Smooth Sandy
 Bumpy Soft Dirt
 Low Traction Grass
 Med.Traction BlueGroove
 High Traction Clay
 Wet Dusty
 Dry Astro