


Name Nick Caro Date 12th April 2015 Track / City Robin Hood Raceway Event BRCA National Rd1

Front Suspension:

Shock Position:



Upper Arm Position:



4.8mm Ball Stud:

- 97050M(Std)
 UM129

Upper Spacer: 1 mm

Camber -1°

Bump Steer Spacer:

0 mm

Toe:

- In
 Out 1°

Sway Bar:

- None
 1 mm

Ackerman Spacer:

1 mm


Lower Sus Holder Block:

Front B-in Rear B-in

Lower Sus Holder Spacer:

Front 0.5 mm Rear 0.5 mm

Comments: Inside Camber link hole on hub

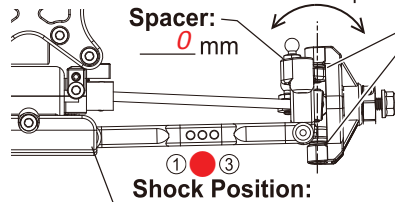

Shock Position:

Axle-Height Spacer:

- Up
 Down

Caster Block:

- 7°
 10°

Wheelbase:

Front 1 mm

Rear 0 mm

Front Diff:

- Gear Diff. #
 Ball Diff. Med

Rear Suspension:

Shock Position:



Upper Arm Position:



4.8mm Ball Stud:

- 97050M(Std)
 UM129

Upper Spacer: 0 mm

Camber -1°

- Sus. Arm:
 LA272(Std)
 UM713

Hub Carrier:



- 0°Type-B(UM519)
 0°Type-B2(UM519-2)
 0°Alu(UMW704-0)
 0.5°Alu(UMW704-05)
 1°Alu(UMW704-1)

Upper Spacer: 2 mm

Sway Bar:

- None
 1.2 mm


Lower Sus Holder Block:

Front B-in Rear E-out

Lower Sus Holder Spacer:

Front 2 mm Rear 1 mm

Comments: 2.5deg inboard + 0.5 Hubs = 3deg - UM713B Wishbones New inside hole

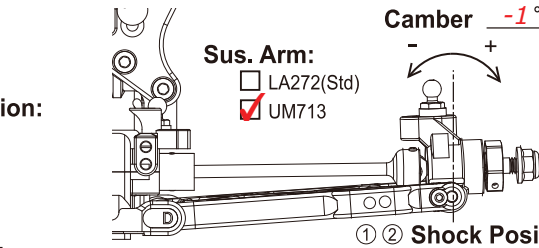

Shock Position:

Wheelbase:

Front: 2 mm

Rear: 2 mm

Slipper Type:

- Separates Direct

Rear Diff:

- Gear Diff. #
 Ball Diff. Med

Shock:

Front

Rear

Shock Piston: Big Bore 2 Hole (2 x 1.6mm) Big Bore 2 Hole (2 x 1.7mm)

Shock Oil: # 32.5wt # 27.5wt


Shock Spring: X-Gear ORANGE/SH #80 X-Gear RED/MH #72

Limiters: in mm out mm in mm out mm

Shock Length(A): 20 mm 27 mm


Shock Top Type: Alu(UM719/Std) UM753-1

5.8mm Ball End:
 Front: S M L
 Rear: S M L



Chassis:

Ride Height:

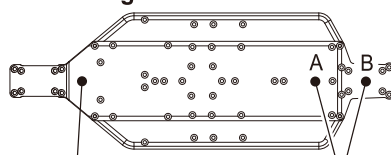

Front 19 mm

Rear A B 19 mm

Tire:

Front Rear

Tire: 2wd Mini Spike Mini Spike

Inserts: Schu Med Schu Med

Wheel: Kit Kit

Traction Compound: Yellow

Electronics:

Battery: Saddle Short

Motor Position: Front

Rear

Servo Mounting: Straight

Sideways

Motor: VST2 6.5

Motor Timing: _____

Pinion/Spur: 78 / 22

ESC: Orion R10

Setting: _____

Radio: Sanwa Exzes

Servo: Futaba

Body / Wing:

Body: Kit Wing Mount: Narrow Wide Wing Dum Height: _____ mm

Wing: Step 3.0 Wing Angle: 4° 7° 10° Lip Height: _____ mm

Material:

Screw: Steel Titanium

Pinion Gear: Steel Aluminium

Shock O-Ring: O-ring X-ring Red Clear

Comment: *Editable by Arn0 at PetitRC.com*

Using UM713B Rear RB6 Wishbones, 3 hole side inside hole, Spaced back 2mm

- Smooth Sandy
 Bumpy Soft Dirt
 Low Traction Grass
 Med.Traction BlueGroove
 High Traction Clay
 Wet Dusty
 Dry Astro