


Name Nick Caro Date 23rd May 2015 Track / City Telford Event BRCA National Rd3

### Front Suspension:

#### Shock Position:



#### Upper Arm Position:



#### 4.8mm Ball Stud:

- 97050M(Std)  
 UM129

Upper Spacer: 1 mm

Camber -1°

#### Bump Steer Spacer:

0 mm

#### Toe:


- In  
 Out 1°

#### Sway Bar:

- None  
 1 mm

#### Ackerman Spacer:

1 mm

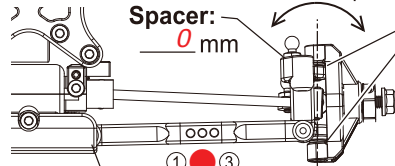

#### Shock Position:

#### Axle-Height Spacer:

- Up  
 Down

#### Caster Block:

- 7°  
 10°

#### Wheelbase:

Front 1 mm  
 Rear 0 mm

#### Lower Sus Holder Block:

Front B-in Rear B-in

#### Lower Sus Holder Spacer:

Front 1 mm Rear 0.5 mm

Comments: Inside Camber link hole on hub

### Front Diff:

- Gear Diff. #  
 Ball Diff. Med

### Rear Suspension:

#### Shock Position:



#### Upper Arm Position:



#### 4.8mm Ball Stud:


- 97050M(Std)  
 UM129

Upper Spacer: 0 mm

Camber -1°

- Sus. Arm:  
 LA272(Std)  
 UM713

#### Hub Carrier:




- 0°Type-B(UM519)  
 0°Type-B2(UM519-2)  
 0°Alu(UMW704-0)  
 0.5°Alu(UMW704-05)  
 1°Alu(UMW704-1)

Upper Spacer: 2 mm

#### Sway Bar:

- None  
 1.2 mm

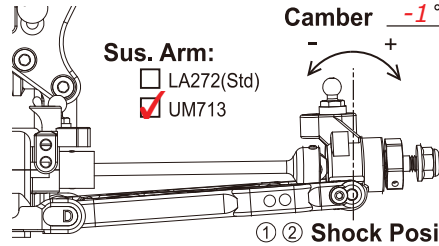

#### Shock Position:

#### Wheelbase:

Front: 2 mm  
 Rear: 2 mm

#### Lower Sus Holder Block:

Front B-in Rear E-out

#### Lower Sus Holder Spacer:

Front 2 pip mm Rear 1 pip mm

Comments: 2.5deg inboard + 0.5 Hubs = 3deg - UM713B Wishbones New inside hole

### Slipper Type:

- Separates  Direct

### Rear Diff:

- Gear Diff. #  
 Ball Diff. Med

### Shock:

#### Front

#### Rear

Shock Piston: Big Bore 2 Hole (2 x 1.6mm) Big Bore 2 Hole (2 x 1.7mm)

Shock Oil: # 42.5wt # 35wt


Shock Spring: X-Gear ORANGE/SH #80 X-Gear RED/MH #72

Limiters: in mm out mm in mm out mm

Shock Length(A): 20 mm 27 mm


Shock Top Type:  Alu(UM719/Std)  UM753-1

5.8mm Ball End:  
 Front:  S  M  L  
 Rear:  S  M  L



### Chassis:

#### Ride Height:

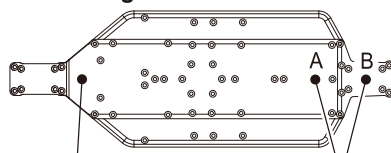

Front 20 mm Rear  A  B 21 mm

### Tire:

#### Front Rear

Tire: 2wd Mini Spike Mini Spike

Inserts: Schu Med Schu Med

Wheel: Kit Kit

Traction Compound: Yellow

### Electronics:

Battery:  Saddle  Short

Motor Position:  Front

Rear

Servo Mounting:  Straight

Sideways

Motor: VST2 6.5

Motor Timing: \_\_\_\_\_

Pinion/Spur: 78 / 22

ESC: Orion R10

Setting: \_\_\_\_\_

Radio: Sanwa Exzes

Servo: Futaba

### Body / Wing:

Body: Kit Wing Mount:  Narrow  Wide Wing Dum Height: \_\_\_\_\_ mm

Wing: Step 3.0 Wing Angle:  4°  7°  10° Lip Height: \_\_\_\_\_ mm

### Material:

Screw:  Steel  Titanium

Pinion Gear:  Steel  Aluminium

Shock O-Ring:  O-ring  X-ring  Red  Clear

Comment: *Editable by Arn0 at PetitRC.com*

Using UM713B Rear RB6 Wishbones, 3 hole side inside hole, Spaced back 2mm

- Smooth  Sandy  
 Bumpy  Soft Dirt  
 Low Traction  Grass  
 Med.Traction  BlueGroove  
 High Traction  Clay  
 Wet  Dusty  
 Dry  Astro