


# LAZER ZX7 SET UP SHEET



Name Kohta Akimoto Date 18/11/18 Truck / City YATABE ARENA Event For Japan nationals std set up

### Front Suspension:

#### Shock Position:




**Shock Stay:**  
 Std.  
 Carbon (LAW58)  
 Other

**Lower Sus Holder Block:**  
 Front Out\_B Rear Out\_B

**Lower Sus Holder Spacer:**  
 Front 1.0 mm Rear 1.0 mm

#### Upper Arm Position:




**4.8mm Ball Stud:**  
 UM129(Std)  
 97050M

**Upper Spacer:** 1 mm


**Camber** 1.5 °

**Spacer:** 0 mm

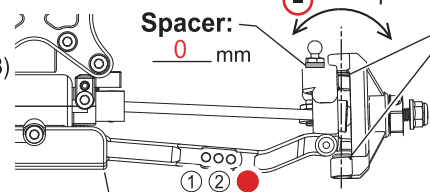

**Shock Position:**  
 Wheelbase: Front 1 mm Rear 1 mm

#### Bump Steer Spacer:




1 mm **Toe:**  
 In  Out 1 °

**Sway Bar:**  
 None  2.0 mm

LAW57 Stabilizer Set

**Ackerman Spacer:** 3 mm



#### Axle-Height Spacer:

Up  Down

**Caster Block:**  
 7°  13°  
 10°

#### Sus. Bush:


Wide  Narrow(Std)

### Front Diff:

Gear Diff. # 10,000  
 Ball Diff.

### Rear Suspension:

#### Shock Position:




**Shock Stay:**  
 Std.  
 Carbon (LAW59)  
 Other

**Wing Stay Position:**

**Lower Sus Holder Block:** Toe In: Front In\_B Rear In\_E 1.5

**Lower Sus Holder Spacer:**  
 Front 0 mm Rear 0 mm

#### Upper Arm Position:




**4.8mm Ball Stud:**  
 97050M(Std)  
 UM129

**Upper Spacer:** 0 mm

**Camber** 1.5 °

**Sus. Arm:**  
 LA272  
 UM713B  
 UM762(Std)

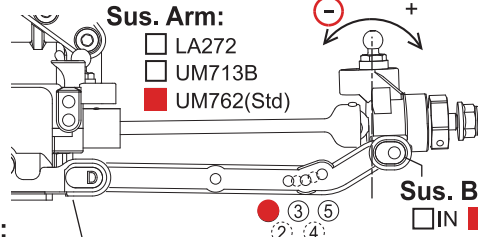

**Wheelbase:**  
 Front 0 mm Rear 2 mm


#### Hub Carrier:

Type-B (UM519)  
 Type-B2 (UM519-2)  
 0°Alu(UMW704-0)  
 0.5°Alu(UMW704-05)  
 1°Alu(UMW704-1)

**Upper Spacer:** 2 mm

**Sus. Bush:**  
 IN  OUT (Std.)

#### Shock Position:



**Wheelbase:**  
 Front: 1 mm Rear: 3 mm

### Center Drive :


Diff. Gear  Slipper Clutch  
 # \_\_\_\_\_

### Rear Diff:


Gear Diff. # 10,000  
 Ball Diff.

### Shock:


	Front	Rear
Shock Piston:	<u>2x1.6 Std</u>	<u>2x1.7 Std</u>
Shock Oil:	# <u>750</u>	# <u>700</u>
Shock Spring:	<u>Yellow</u>	<u>Yellow</u>
Limiters:	in <u>0</u> mm out <u>0</u> mm	in <u>0</u> mm out <u>0</u> mm
Shock Length (A):	<u>20.0</u> mm	<u>27.5</u> mm
Shock Top Type:	<input type="checkbox"/> Alu. (UM719) <input checked="" type="checkbox"/> UM753-1B(Std.)	




### Ball End:



### Spring Sheet:



### Chassis:

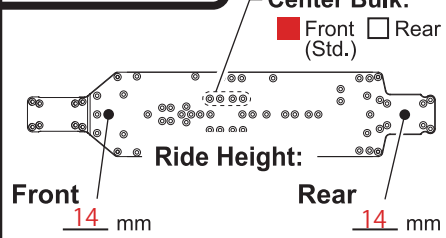

**Center Bulk:**  
 Front  Rear (Std.)

**Ride Height:**  
 Front 14 mm Rear 14 mm

### Electronics:

Motor: ORION ULTIMATE 5.5T  
 Pinion / Spur: 19/78  
 ESC: ORION HMX 10  
 Radio: FUTABA 7PX  
 Servo: OS T-1  
 Battery: ORION 5800

### Tire:

	Front	Rear
Tire:	<u>Wide Stagger Rib</u>	<u>Cactus 2.2</u>
Compound:	<u>Yellow</u>	<u>Yellow</u>
Inserts:	<u>U6733</u>	<u>U6734</u>
Wheel:	<u>W5201W</u>	<u>W5202W</u>
Note:	_____	

### Body / Wing:

**Body:** LAB07LW (t0.6) **Wing Dum Height:** 20 mm

**Wing:** UM767 **Wing Angle:**  4°  7°  10° **Lip Height:** 15 mm

### Comment :

\_\_\_\_\_

**New option parts coming soon!!**

### Truck Condition

<input checked="" type="checkbox"/> Smooth	<input type="checkbox"/> Sandy
<input type="checkbox"/> Bumpy	<input type="checkbox"/> Soft Dirt
<input type="checkbox"/> Low Truction	<input type="checkbox"/> Grass
<input type="checkbox"/> Med. Truction	<input type="checkbox"/> Blue Groore
<input checked="" type="checkbox"/> Higt Truction	<input type="checkbox"/> Clay
<input type="checkbox"/> Wet	<input type="checkbox"/> Dusty
<input type="checkbox"/> Dry	<input checked="" type="checkbox"/> Carpet

### Material:

**Screw:**  Steel  Titanium

### Pinion Gear:

Steel  Aluminum

### Shock O-Ring:

O-ring  X-ring  Red  Clear