

NAME:

DATE:

EVENT:

TRACK:



TRACK CONDITIONS

☐ Indoor

☐ Tight

☐ Smooth

☐ Hard Packed

☐ Blue Groove

☐ Wet

☐ Grass

☐ Low Bite

☐ Med Bite

☐ High Bite

☐ Outdoor

☐ Open

☐ Rough

☐ Loose/Loamy

☐ Dry

☐ Dusty

☐ Astroturf

☐ Other_____

FRONT SUSPENSION

Toe:_____

Ride Height:_____Camber:_____

Caster: ☐ 0° ☐ 5°

Kick Angle: ☐ 20° ☐ 25° ☐ 30°

VLA Setting: ☐ Short Arm ☐ Long Arm

Oil:_____

Piston:_____

Spring: ☐ Standard ☐ Low Freq. Color:_____

Front Pivot: ☐ Aluminum ☐ Plastic ☐ HRC

Kick Shim: ☐ Brass ☐ Plastic

Shock Limiters:_____Stroke:_____

Shock Location:_____

Steering Type: ☐ Slide Rack ☐ Bell Cranks ☐ Aluminum

Spindle Ball Stud: ☐ Standard ☐ Low Mount

Bumper Steer Spacers:_____


Ackerman Ball Stud: ☐ Standard ☐ Low Mount

Ackerman Spacers:_____

Ackerman Arm: ☐ #1 ☐ #2 ☐ #3 ☐ _____

Trail: ☐ 2mm ☐ 3mm ☐ 4mm

Camber Link:_____

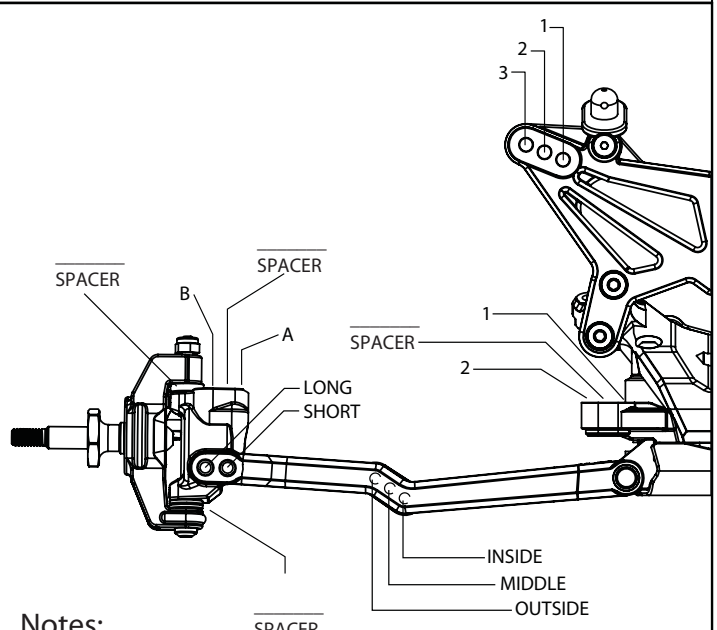

Notes:

REAR SUSPENSION

Transmission Type: ☐ 3-Gear ☐ 4-Gear ☐ Laydown

Toe Inserts: ☐ 0.5° ☐ 1° ☐ 1.5° ☐ 2° ☐ 2.5° ☐ 3° ☐ 3.5° ☐ 4°

Anti-Squat Inserts: ☐ 0° ☐ 0.5° ☐ 1° ☐ 1.5° ☐ 2° ☐ 2.5° ☐ 3°

Roll Center: ☐ Low Roll Center (LRC) ☐ High Roll Center (HRC)

Ride Height:_____Camber:_____

Rear Hub Spacing:_____

Hex Width:_____

Sway Bar:_____

Oil:_____

Piston:_____

Spring: ☐ Standard ☐ Low Freq. Color:_____

Shock Limiters:_____Stroke:_____

Shock Location:_____

Inner Link Spacer: ☐ -1mm ☐ 0mm ☐ +1mm


Camber Link:_____

Body/Spoiler:_____

Battery Position:_____

Diff. Type: ☐ Ball ☐ Gear Setting:_____

Notes:_____

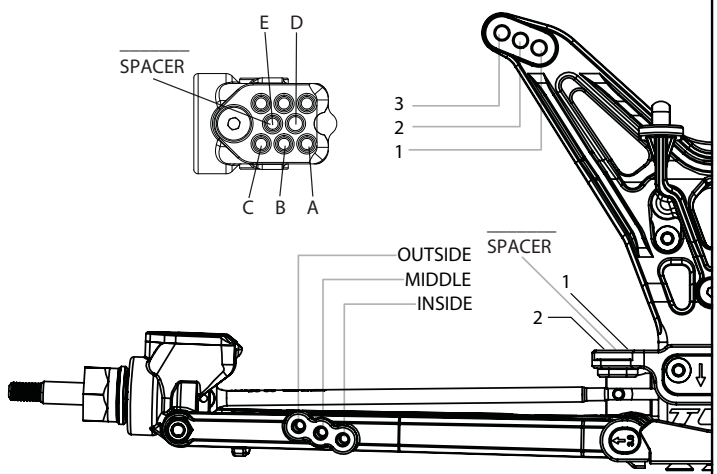

ELECTRONICS

Timing Advance: _____

Radio: _____ Throttle/Brake Expo: _____

Servo: _____ Servo Expo: _____

ESC: _____ Throttle/Brake EPA: _____

Initial Brake: _____ Motor: _____

Drag Brake: _____ Pinion: _____ Spur: _____

Throttle Profile: _____ Battery: _____

Weight Placement
(Mark with "X")

TIRES Brand & Type

Compound

Insert

Additive

Front: _____

Rear: _____

Notes: _____