



By www.petitrc.fr.st

Setup Sheet

Driver: PINISH PETER

Date: 23/07/2000

Track: Trelleborg (Sweden) - Euro 2000

- Indoor
- Outdoor

- Slick
- Loose-Dirt
- Blue-Groove

- Smooth
- Rough
- Extra-Rough

- Tight / Open

Front Suspension *(Circle or Check the Appropriate Settings)*

Toe In Out _____ °

Ride Height _____

Camber - + _____ 1 _____ °

Caster Stock Other _____ °

Diff Plastic Steel Dogbone Aluminum CVD Steel

Drive Shafts

Front Shocks


Oil: 20 ASSO

Piston: 57 Standard / Drilled

Spring: orange

Internal Spring: spring


Limiters: Inside- _____ / Outside- _____ /

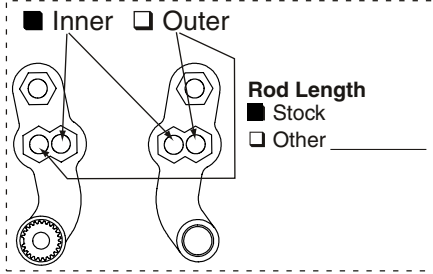

Notes:

Sway Bar

- No
- Yes size _____

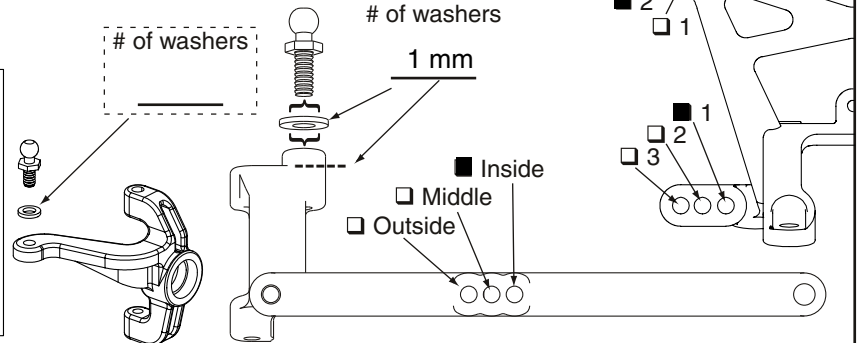

Rear Suspension

Toe-In Inside Outside _____ °

Ride Height _____

Camber - + _____ 1 _____ °

Pivot Support No Shim Shim Under Front Shim Under Rear

Diff Plastic Steel Dogbone Aluminum CVD Sliders Steel Plastic

Drive Shafts


Rear Shocks

Oil: 25 Asso

Piston: 54 Standard / Drilled

Spring: pink

Limiters: Inside- A Outside- _____ /

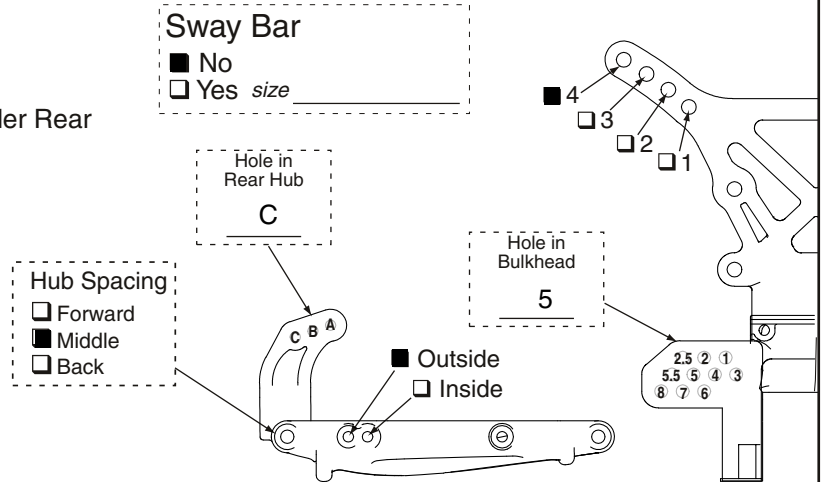

Notes:

Tires Front: Taper Pin Compound: Red Foam: Original

Rear: Taper Pin Compound: Red Foam: Original

Motor: Reedy

Pinion: 19

Spur: 87

Wing Setup: _____

Clicker Adjustment: Locked One-Way Soft Spring

Slipper: Yes No Stiff Spring _____

Battery Placement: Back Forward Other: _____

Notes: _____