

Setup Sheet

Track: ROAR Nats Texas

Driver: Greg Hodapp

Date: January 2003

☒ Indoor	☒ Smooth	☐ Slippery
☐ Outdoor	☐ Rough	☐ High-Bite
☒ Tight / ☐ Open		☒ Blue-Groove

FRONT SUSPENSION (Circle or Check the Appropriate Settings)

Toe ☒ In 1°
☐ Out

Ride Height Arms level

Camber ☒ - 2°
☐ +

Caster ☒ Stock 30°
☐ Other

Sway Bar ☐ No
☒ Yes size .030

Front Shocks

Oil: 30 wt Losi

Piston 56 ☒ Standard / ☐ Drilled


Spring: Orange

Limiters: ☐ Inside- .060 ☐ Outside- 0


of washers under steering /
tie-rod ball studs

Spindle ball stud: .030

Bellcrank ball stud: 0



of washers
under ball stud
1

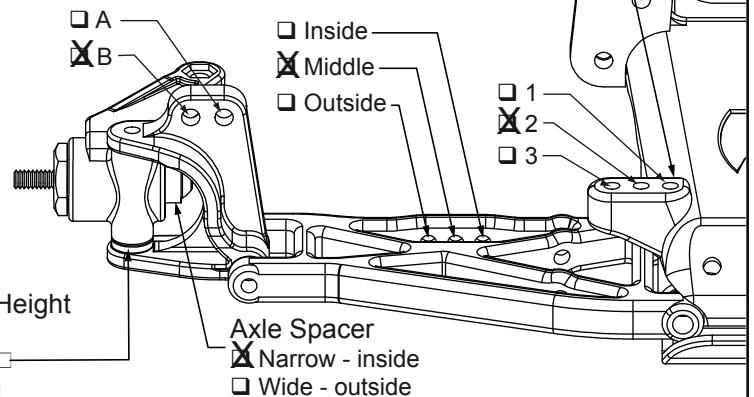

Spindle Height

☐ Top
☐ Middle
☒ Bottom

Axle Spacer
☒ Narrow - inside
☐ Wide - outside

REAR SUSPENSION

Toe-In ☒ Inside 3°
☐ Outside

Pivot Support 2 ☒ No Shim
☐ Shim Under Front
☐ Shim Under Rear # of shims: _____

Ride Height Bones level

Camber ☒ - 1°
☐ +

Drive Shafts ☒ Dogbones ☐ Aluminum
☐ CVDs ☒ Steel

Rear Hub Spacing ☐ Forward
☒ Center
☐ Rear

Outdrives ☐ Steel
☒ Plastic

Sway Bar ☒ No
☐ Yes size _____

Rear Shocks

Oil: 27.5 wt Losi

Piston 56 ☒ Standard / ☐ Drilled

Spring: Pink


Limiters: ☐ Inside- _____ ☐ Outside- 0

Wing Position
☒ Forward
☐ Back

Wing Mount
☐ Top
☒ Bottom

☐ 4
☐ 3
☒ 2
☐ 1

☐ 1
☒ 2
☐ 3

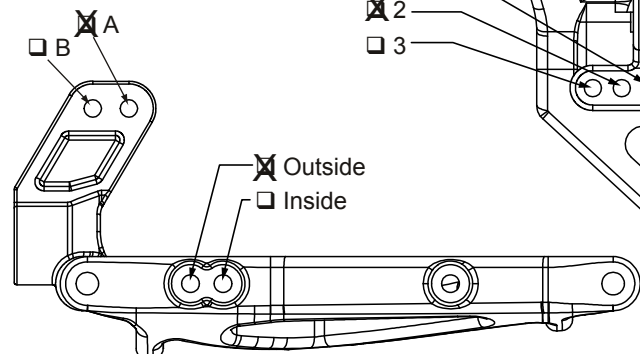

Tires

Front: A-7204 Xtra Wide body

Compound

Red

Foam

Trinity Blue

Rear: A-7369 Taper Pin

Red

Trinity Blue

Motor: 12x3 Pinion/Spur: 21/78

Battery Position: Forward

Notes: All graphite car Slicks