

# Setup Sheet

Track: ROAR Stock Nationals

Driver: Chris Bridgewater

Indoor  
 Outdoor

Smooth  
 Rough

Slippery  
 High-Bite  
 Blue-Groove

Date: July 23, 2000

Tight /  Open

## FRONT SUSPENSION

(Circle or Check the Appropriate Settings)

Toe  In 1°  
 Out

Ride Height Arms just below level

Camber  - 1°  
 +


Caster  Stock  
 Other 25°

Sway Bar  No  
 Yes size \_\_\_\_\_


# of washers under steering / tie-rod ball studs

Spindle ball stud: \_\_\_\_\_

Bellcrank ball stud: 1



# of washers under ball stud: 1

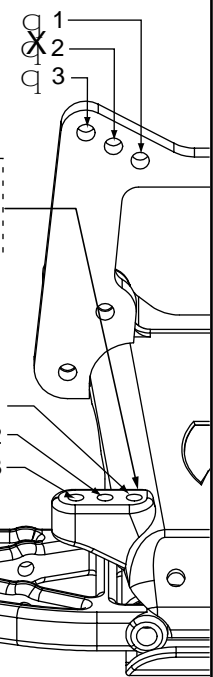

### Front Shocks

Oil: 35 Losi

Piston: 55  Standard /  Drilled

Spring: Orange

Limiters:  Inside- .050  Outside- \_\_\_\_\_

### Spindle Height

Top  
 Middle  
 Bottom

### Axle Spacer

Narrow - inside  
 Wide - outside

## REAR SUSPENSION

Toe-In  Inside 3°  
 Outside

Pivot Support 2  No Shim  
 Shim Under Front  
 Shim Under Rear } # of shims: 1

Ride Height Bones just below level

Camber  - 1°  
 +

Drive Shafts  Dogbones  Aluminum  
 CVDs  Steel

Rear Hub Spacing  Forward  
 Center  
 Rear

Outdrives  Steel  
 Plastic


Sway Bar  No  
 Yes size \_\_\_\_\_

### Wing Position

Forward  
 Back

### Wing Mount

Top  
 Bottom

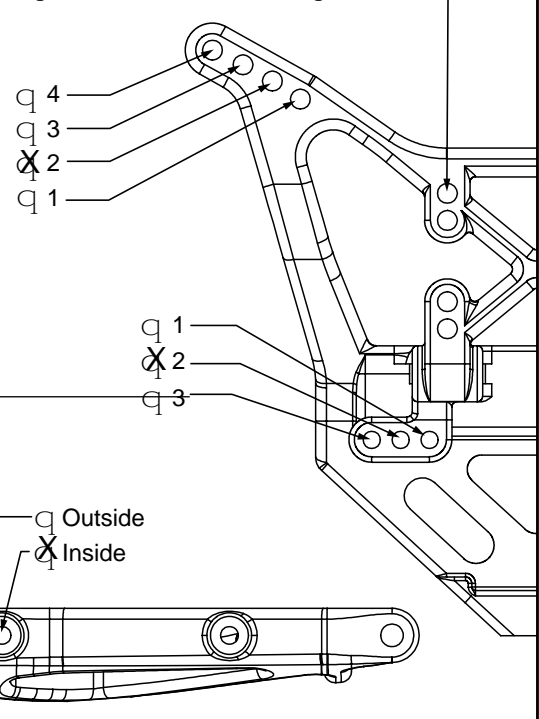

### Rear Shocks

Oil: 30wt Losi

Piston: 56  Standard /  Drilled

Spring: Pink

Limiters:  Inside- .050  Outside- \_\_\_\_\_

Tires  
Front: 7204 Extra Wide Bodies  
Rear: 7369 X-2000  
Compound  
Silver  
Silver  
Foam  
3/4 Rear Firm Losi  
Firm Losi

Motor: Hand Out  
Pinion/Spur: 24/82  
Battery Position: Forward

Notes: \_\_\_\_\_