



# SETUP SHEET

Track: \_\_\_\_\_

Driver: \_\_\_\_\_

Date: \_\_\_\_\_

- Indoor
- Outdoor
- Tight /  Open

- Slick
- Loose Dirt
- Blue-Groove

- Smooth
- Rough
- Extra-Rough

## FRONT SUSPENSION

(Circle or Check the Appropriate Settings)

In  
Toe  Out \_\_\_\_\_

Pivot Support:  5F(5°),  7.5F(7.5°),  10F(10°)

Ride Height \_\_\_\_\_

Camber  -  
 + \_\_\_\_\_

Caster  Stock  
 Other \_\_\_\_\_

No  
Sway Bar  Yes size \_\_\_\_\_

Front Drive:  
 Diff  
 One-Way

Ackerman:  
 Forward  
 Back

Plastic  
Diff  Steel

Drive Shafts

- Standard 42F 42R
- Overdrive 41F 42R
- Underdrive 42F 41R


- Dogbone  Aluminum
- CVD  Steel

# of washers under steering/  
tie-rod ball studs

Spindle ball stud: \_\_\_\_\_

Bellcrank ball stud: \_\_\_\_\_

# of washers  
\_\_\_\_\_

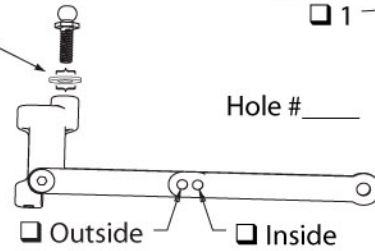

Hole # \_\_\_\_\_

- 3
- 2
- 1



### Front Shocks

Oil: \_\_\_\_\_

Piston: \_\_\_\_\_  Standard /  Drilled

Spring: \_\_\_\_\_

Internal Spring: \_\_\_\_\_

Limiters:  Inside- \_\_\_\_\_  Outside- \_\_\_\_\_

### Notes:

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

## REAR SUSPENSION

Pivot Support:  -IR(-1°),  IR(1°),  3R(3°)

Toe-In  Inside  
 Outside \_\_\_\_\_

Ride Height \_\_\_\_\_

Camber  -  
 + \_\_\_\_\_

Diff  Plastic  Steel  
 Dogbone  Aluminum  
 CVD  Steel  
 Sliders  Plastic

Drive Shafts

No  
Sway Bar  Yes size \_\_\_\_\_

Hub Spacing

- Forward
- Middle
- Back

B  A

Outside

Inside

- 3
- 2
- 1

- 3
- 2
- 1

### Rear Shocks

Oil: \_\_\_\_\_

Piston: \_\_\_\_\_  Standard /  Drilled

Spring: \_\_\_\_\_

Limiters:  Inside \_\_\_\_\_  Outside- \_\_\_\_\_

### Notes:

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

Tires: \_\_\_\_\_ Compound \_\_\_\_\_ Foam \_\_\_\_\_

Front: \_\_\_\_\_

Rear: \_\_\_\_\_

Wing Setup: \_\_\_\_\_

Motor: \_\_\_\_\_

Pinion: \_\_\_\_\_

Spur: \_\_\_\_\_

Battery Placement:  Back  Forward  Other: \_\_\_\_\_

Transponder Position: \_\_\_\_\_

Notes: \_\_\_\_\_