



Setup Sheet

Driver: _____

Date: _____

Track: _____

- | | | |
|--|---------------------------------|--------------------------------------|
| <input type="checkbox"/> Indoor | <input type="checkbox"/> Smooth | <input type="checkbox"/> Slippery |
| <input type="checkbox"/> Outdoor | <input type="checkbox"/> Rough | <input type="checkbox"/> High-Bite |
| <input type="checkbox"/> Tight / <input type="checkbox"/> Open | | <input type="checkbox"/> Blue-Groove |

FRONT SUSPENSION *(Circle or Check the Appropriate Settings)*

Toe In _____ °
 Out _____ °

Ride Height _____

Camber - _____ °
 + _____ °


Caster Stock _____ °
 Other _____ °

Sway Bar No
 Yes size: _____

of washers under steering/tie-rod ball studs
 Spindle ball stud: _____
 Bellcrank ball stud: _____

Spindle Location

- A
- B
- Top
- Middle
- Bottom



of washers under ball stud: _____

Axle Spacer

- Narrow - inside
- Wide - outside

- Inside
- Middle
- Outside

- Long
- Short

- Long
- Short

Front Shocks

Oil: _____
 Piston: Standard / Drilled
 Spring: _____ Internal: Yes / No
 Limiters: Inside- Outside-_____

REAR SUSPENSION

Toe-In Inside _____ °
 Outside _____ °

Pivot Support No Shim
 Shim Under Front — # of shims: _____

Ride Height _____

Camber - _____ °
 + _____ °

Rear Hub Spacing Forward
 Center
 Rear

Sway Bar No
 Yes size: _____

Body: _____

Wing: _____

Front Wing: Yes / No

Wing Position


- Forward
- Back

Wing Mount

- Top
- Bottom

- 4
- 3
- 2
- 1

Drive Shafts Dogbones Aluminum
 CVDs Steel

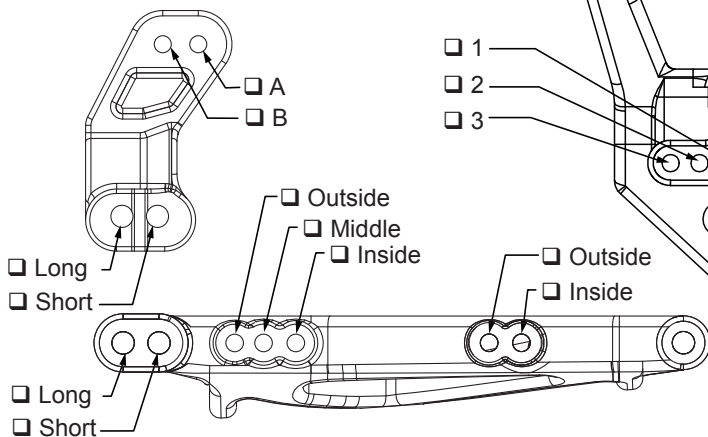

Rear Shocks

Oil: _____
 Piston: Standard / Drilled
 Spring: _____ Internal: Yes / No
 Limiters: Inside- Outside-_____

Tires

Front: _____ Compound _____ Foam _____
 Rear: _____ Compound _____ Foam _____

Motor: _____ Pinion/Spur: / _____

Battery Position: _____

Weather Conditions/Notes:
