

SETUP SHEET

Track:

Driver: _____

☐ Indoor
☐ Outdoor

☐ Smooth
☐ Rough

☐ Slippery
☐ High-Bite

Date: _____

☐ Tight / ☐ Open

☐ Blue-Groove

XXX-SCT

FRONT SUSPENSION (Circle or Check the Appropriate Settings)

☐ In _____ °
Toe ☐ Out _____ °

Ride Height _____

Camber ☐ - _____ °
☐ + _____ °

Caster ☐ Stock _____ °
☐ Other _____ °

Sway Bar ☐ No
☐ Yes size: _____



of washers under steering / tie-rod ball studs

Spindle ball stud: _____

Bellcrank ball stud: _____

Spindle Location

☐ A
☐ B
☐ C
☐ Top
☐ Middle
☐ Bottom




☐ 4
☐ 3
☐ 2
☐ 1

of washers under ball stud

☐ Inside
☐ Middle
☐ Outside

☐ 1
☐ 2
☐ 3

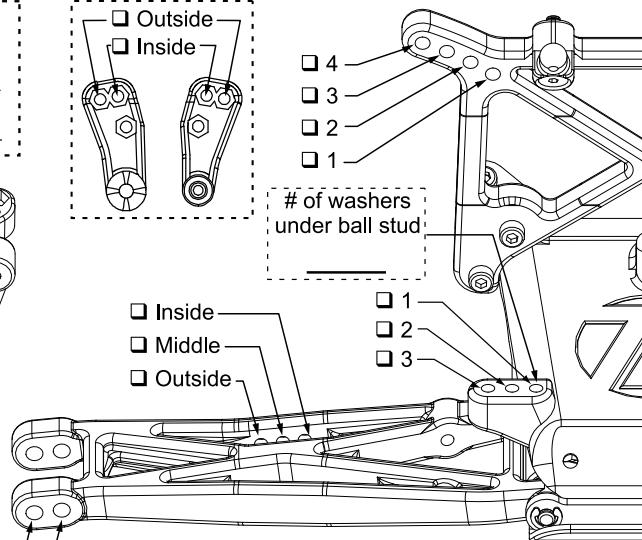

☐ Long
☐ Short

Front Shocks

Oil: _____

Piston: _____ ☐ Standard / ☐ Drilled

Spring: _____ Internal: ☐ Yes / ☐ No

Limiters: ☐ Inside- _____ ☐ Outside- _____

REAR SUSPENSION

☐ Inside _____ °
Toe-In ☐ Outside _____ °

Pivot Support _____ ☐ No Shim
☐ Shim Under Front
☐ Shim Under Rear > # of shims: _____

Ride Height _____

Camber ☐ - _____ °
☐ + _____ °

Drive Shafts ☐ Dogbones ☐ Aluminum
☐ CVDs ☐ Steel

Rear Hub Spacing ☐ Forward
☐ Center
☐ Rear

Outdrives ☐ Steel
☐ Plastic

Sway Bar ☐ No
☐ Yes size _____

Rear Shocks

Oil: _____

Piston: _____ ☐ Standard / ☐ Drilled


Spring: _____

Limiters: ☐ Inside- _____ ☐ Outside- _____

☐ A
☐ B

☐ Outside
☐ Middle
☐ Inside

☐ 1
☐ 2
☐ 3

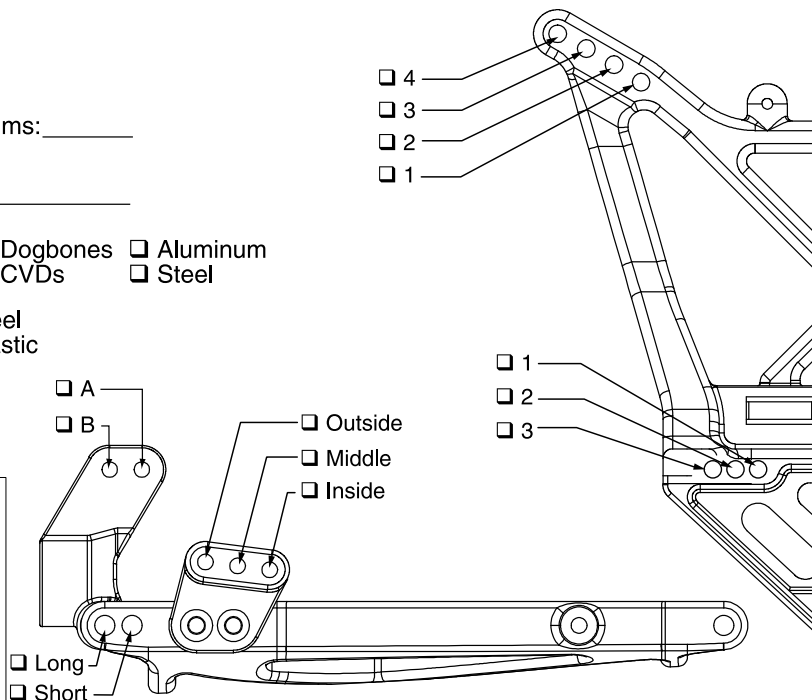

☐ Long
☐ Short

Tires

Compound

Foam

Front: _____

Rear: _____

Motor: _____ Pinion/Spur: ____ / ____

Battery Position: _____

Weather Conditions/Notes: