



Setup Sheet

Track: ROAR Nats Texas

Driver: Greg Hodapp

Date: Jan 2003

☒ Indoor
☐ Outdoor

☒ Smooth
☐ Rough

☐ Slippery
☐ High-Bite
☒ Blue-Groove

☒ Tight / ☐ Open

FRONT SUSPENSION (Circle or Check the Appropriate Settings)

Toe ☒ In 1 °
☐ Out

Ride Height Arms Level

Camber ☒ - 1 °
☐ +

Caster ☒ Stock 0 °
☐ Other

Sway Bar ☐ No
☒ Yes size .030

Front Shocks

Oil: 27.5 wt Losi

Piston 56 ☒ Standard / ☐ Drilled


Spring: Red

Limiters: ☐ Inside- ☐ Outside-

of washers under steering / tie-rod ball studs

Spindle ball stud: .030

Bellcrank ball stud: 0



of washers under ball stud 1

☐ 1
☒ 2
☐ 3
☐ 4

☐ A
☒ B
☐ C

☐ Inside
☐ Middle
☒ Outside

☐ 1
☒ 2
☐ 3

Spindle Location

☐ Top
☐ Middle
☒ Bottom

REAR SUSPENSION

Toe-In ☒ Inside 3 °
☐ Outside

Pivot Support 2 deg ☒ No Shim
☐ Shim Under Front
☐ Shim Under Rear > # of shims:

Ride Height Bones Level

Camber ☒ - 1 °
☐ +

Drive Shafts ☒ Dogbones ☐ Aluminum
☐ CVDs ☒ Steel

Rear Hub Spacing ☐ Forward
☒ Center
☐ Rear

Outdrives ☐ Steel
☒ Plastic

Sway Bar ☒ No
☐ Yes size


Rear Shocks

Oil: 27.5 wt Losi


Piston 56 ☒ Standard / ☐ Drilled

Spring: Pink

Limiters: ☐ Inside- none ☐ Outside- ends 2 1/2 turns

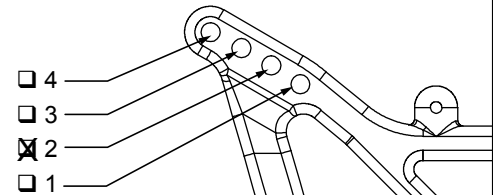

☐ 1
☒ 2
☐ 3

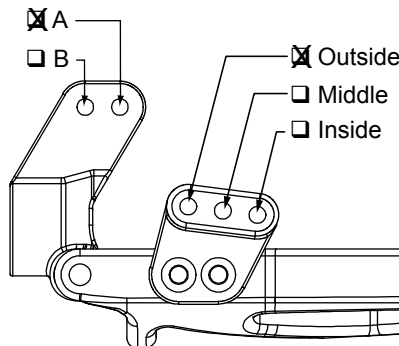

Tires

Front: 8 Rib

Rear: Taper Pln

Compound

Red

Red

Foam

Trinity Blue

Trinity Blue

Motor: 10x2 Pinion/Spur: 18/ 86

Battery Position: Middle

Notes: Slick Tires