


Name: Kit Setup Date: _____ Event: _____

City: _____ State: _____ Track: _____

Track Conditions: Indoor Tight Smooth Hard Packed Blue Groove Wet Grass Low Bite High Bite
 Outdoor Open Rough Loose/Loamy Dry Dusty Astro Turf Med Bite Other _____

Front Suspension


Toe: 0 Degree
 Ride Height: 24mm
 Camber: -1 degree
 Caster: 0° 3° 5° 10°
 Kick Angle: 20° 25° 30°
 Sway Bar: No
 Oil: 27.5 wt
 Piston: 55
 Spring: Red
 Spindle Type: Inline Trailing
 Shock Limiters: 2mm
 Shock Location: #2 on tower/middle on arm
 Bump Steer: 2mm on spindle
 Camber Link: #1 with 2mm spacers and 0mm spacers on caster block

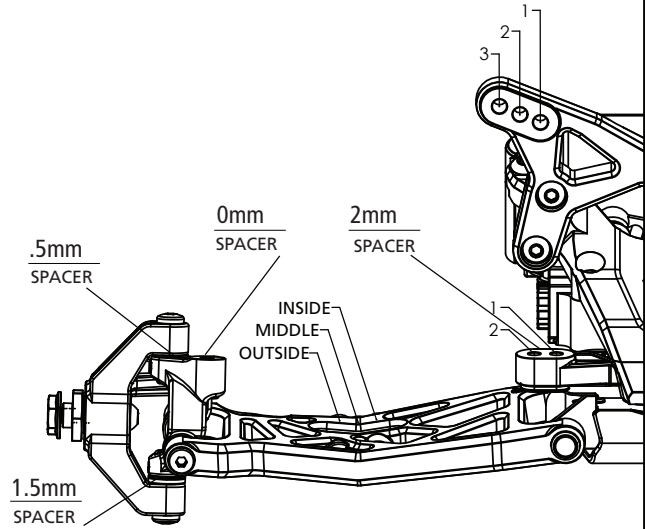

Notes: _____

Rear Suspension

Chassis Configuration: Rear Motor Mid Motor
 Toe: 4 degree
 Anti-Squat: 1 degree
 Roll Center: Low Roll Center (LRC) High Roll Center (HRC)
 Ride Height: 23mm
 Camber: -1 degree
 Rear Hub Spacing: Middle
 Hex Width: Stock
 Sway Bar: No
 Oil: 27.5 wt
 Piston: 55
 Spring: Yellow
 Shock Limiters: 0
 Camber Link: 1/B
 Shock Locations: #2 on tower/inside on arm
 Wing/Wickerbill: Stock
 Battery Position: Forward

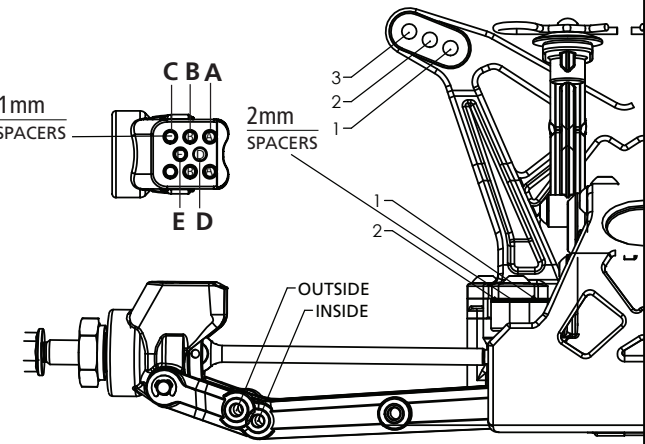

Electronics

Timing Advance: _____
 Radio: _____ Throttle/Brake Expo: _____
 Servo: _____ Servo Expo: _____
 ESC: _____ Throttle/Brake EPA: _____
 Initial Brake: _____ Motor: _____
 Drag Brake: _____ Pinion: _____ Spur: 76
 Throttle Profile: _____ Battery: _____

Weight Placement (Mark with "X")	Tires	Compound	Insert	Additive
<p>Weight of each piece _____ oz./g</p>	Front: _____	_____	_____	_____
	Rear: _____	_____	_____	_____
	Notes: _____	_____	_____	_____