


Name: _____		Date: _____ Event: _____	
City: _____ State: _____		Track: _____	
Track Conditions ☐ Indoor ☐ Tight ☐ Smooth ☐ Hard Packed ☐ Blue Groove ☐ Outdoor ☐ Open ☐ Rough ☐ Loose/Loamy ☐ Dry	☐ Wet ☐ Grass ☐ Low Bite ☐ High Bite ☐ Dusty ☐ Astro Turf ☐ Med Bite ☐ Other _____		

FRONT SUSPENSION


Toe: _____
 Ride Height: _____ Camber: _____
 Caster: ☐ 0° ☐ 5°
 Kick Angle: ☐ 20° ☐ 25° ☐ 30°
 VLA Setting: ☐ Short Arm ☐ Long Arm
 Oil: _____
 Piston: _____
 Spring: ☐ Standard ☐ Low Freq. Color: _____
 Front Pivot: ☐ Aluminum ☐ Plastic ☐ HRC
 Kick Shim: ☐ Brass ☐ Plastic
 Shock Limiters: _____ Stroke: _____
 Shock Location: _____
 Steering Type: ☐ Slide Rack ☐ Bell Cranks
 Spindle Ball Stud: ☐ Standard ☐ Low Mount
 Bumper Steer Spacers: _____
 Ackermann Ball Stud: ☐ Standard ☐ Low Mount
 Ackermann Spacers: _____
 Camber Link: _____

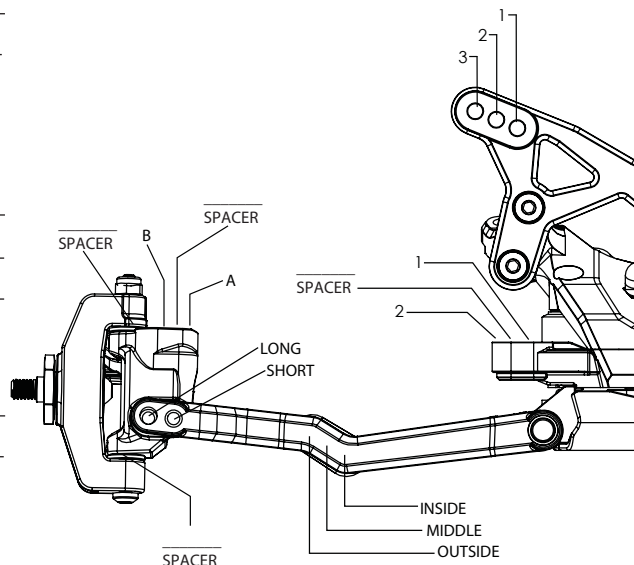

Notes: _____

REAR SUSPENSION


Transmission Type: ☐ 3-Gear ☐ 4-Gear
 Toe Inserts: ☐ 0.5° ☐ 1° ☐ 1.5° ☐ 2° ☐ 2.5° ☐ 3° ☐ 3.5° ☐ 4°
 Anti-Squat Inserts: ☐ 0° ☐ .5° ☐ 1° ☐ 1.5° ☐ 2° ☐ 2.5° ☐ 3°
 Roll Center: ☐ Low Roll Center (LRC) ☐ High Roll Center (HRC)
 Ride Height: _____ Camber: _____
 Rear Hub Spacing: _____
 Hex Width: _____
 Sway Bar: _____
 Oil: _____
 Piston: _____
 Spring: ☐ Standard ☐ Low Freq. Color: _____
 Shock Limiters: _____ Stroke: _____
 Shock Location: _____
 Inner Link Spacer: ☐ -1mm ☐ 0mm ☐ +1mm
 Camber Link: _____
 Wing/Wickerbill: _____
 Battery Position: _____

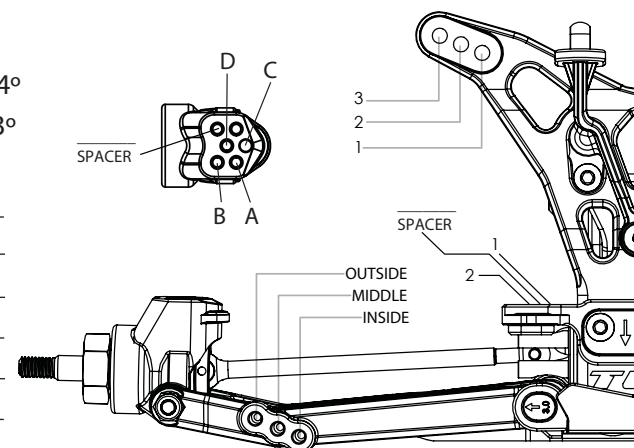

ELECTRONICS

Timing Advance: _____
Radio: _____ Throttle/Brake Expo: _____
Servo: _____ Servo Expo: _____
ESC: _____ Throttle/Brake EPA: _____
Initial Brake: _____ Motor: _____
Drag Brake: _____ Pinion: _____ Spur: _____
Throttle Profile: _____ Battery: _____

Weight Placement
(Mark with "X")



Weight of
each piece _____ oz./g

TIRES

Compound	Insert	Additive
Front: _____	_____	_____
Rear: _____	_____	_____
Notes: _____	_____	