

Name: Kit Setup		Date: _____ Event: _____	
City: _____ State: _____		Track: _____	
Track Conditions: ☐ Indoor ☐ Tight ☐ Smooth ☐ Hard Packed ☐ Blue Groove ☐ Wet ☐ Grass ☐ Low Bite ☐ High Bite ☐ Outdoor ☐ Open ☐ Rough ☐ Loose/Loamy ☐ Dry ☐ Dusty ☐ Astro Turf ☐ Med Bite ☐ Other _____			

Front Suspension

Toe: +1 degree

Ride Height: 24mm Camber: -1 degree

Caster: ☐ 0° ☒ 5°

Kick Angle: ☐ 20° ☒ 25° ☐ 30°

VLA Setting: ☒ Short Arm ☐ Long Arm

Oil: 30wt.

Piston: 2 x 1.5mm

Spring: ☐ Standard ☒ Low Freq. Color: Red

Front Pivot: ☐ Aluminum ☒ Plastic ☐ HRC

Kick Shim: ☐ Brass ☒ Plastic

Shock Limiters: 1mm Stroke: 22mm

Shock Location: 1-Middle

Steering Type: ☐ Slide Rack ☒ Bell Cranks


Spindle Ball Stud: ☐ Standard ☒ Low Mount

Bumper Steer Spacers: 2mm

Ackermann Ball Stud: ☐ Standard ☒ Low Mount

Ackermann Spacers: .5mm

Camber Link: 2-A

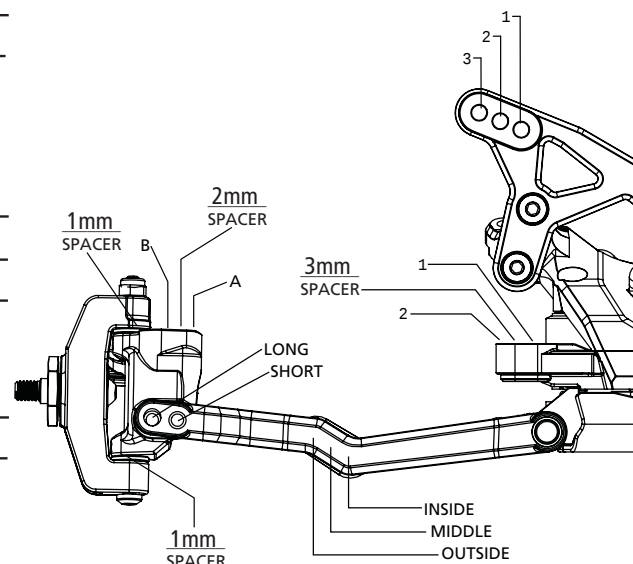

Notes: _____

Rear Suspension

Transmission Type: ☒ 3-Gear ☐ 4-Gear

Toe Inserts: ☐ 0.5° ☐ 1° ☐ 1.5° ☐ 2° ☐ 2.5° ☒ 3° ☐ 3.5° ☐ 4°

Anti-Squat Inserts: ☐ 0° ☐ .5° ☐ 1° ☐ 1.5° ☒ 2° ☐ 2.5° ☐ 3°

Roll Center: ☒ Low Roll Center (LRC) ☐ High Roll Center (HRC)

Ride Height: 22.5mm Camber: -1.5 degrees

Rear Hub Spacing: Middle (2mm front, 2mm rear)

Hex Width: Standard

Sway Bar: None

Oil: 30wt.

Piston: 2 x 1.6mm

Spring: ☐ Standard ☒ Low Freq. Color: Yellow

Shock Limiters: 0mm Stroke: _____


Shock Location: 2-Inside

Inner Link Spacer: ☒ -1mm ☐ 0mm ☐ +1mm

Camber Link: 1-D

Wing/Wickerbill: TLR 6.5", Low Wicker Line


Battery Position: Shorty, Fully Back

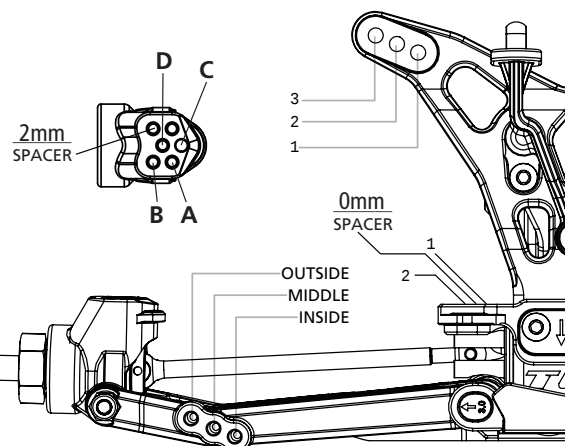

Electronics

Radio: _____	Timing Advance: _____
Servo: _____	Throttle/Brake Expo: _____
ESC: _____	Servo Expo: _____
Initial Brake: _____	Throttle/Brake EPA: _____
Drag Brake: _____	Motor: _____
Throttle Profile: _____	Pinion: _____ Spur: _____
	Battery: _____

Weight Placement
(Mark with "X")



Weight of
each piece _____ oz./g

Tires	Compound	Insert	Additive
Front: _____	_____	_____	_____
Rear: _____	_____	_____	_____
Notes: _____	_____		