


Name: TLR Team		Date: July 18-22, 2012	Event: Off-Road Shootout
City: Saugus		State: CA	
Track: Hot Rod Hobbies			
Track Conditions: <input type="checkbox"/> Indoor <input type="checkbox"/> Tight <input checked="" type="checkbox"/> Smooth <input checked="" type="checkbox"/> Hard Packed <input checked="" type="checkbox"/> Blue Groove <input type="checkbox"/> Wet <input type="checkbox"/> Grass <input type="checkbox"/> Low Bite <input checked="" type="checkbox"/> High Bite <input checked="" type="checkbox"/> Outdoor <input checked="" type="checkbox"/> Open <input type="checkbox"/> Rough <input type="checkbox"/> Loose/Loamy <input checked="" type="checkbox"/> Dry <input type="checkbox"/> Dusty <input type="checkbox"/> Astro Turf <input type="checkbox"/> Med Bite <input type="checkbox"/> Other _____			

## Front Suspension


Toe: 0 degrees  
 Ride Height: 31mm (body on)  
 Camber: -1 degree  
 Caster: ☐ 0° ☐ 3° ☒ 5° ☐ 10°  
 Kick Angle: ☐ 20° ☒ 25° ☐ 30°  
 Sway Bar: Pink (1.5mm)  
 Shock Type: ☐ Bladder ☒ Emulsion Oil: 37.5 Losi  
 Piston: 55 x 4  
 Spring: Black (TLR5184)  
 Shock Limiters: 1mm  
 Shock Location: 1 - Outside  
 Bump Steer: 0mm  
 Camber Link: 1 (inside)

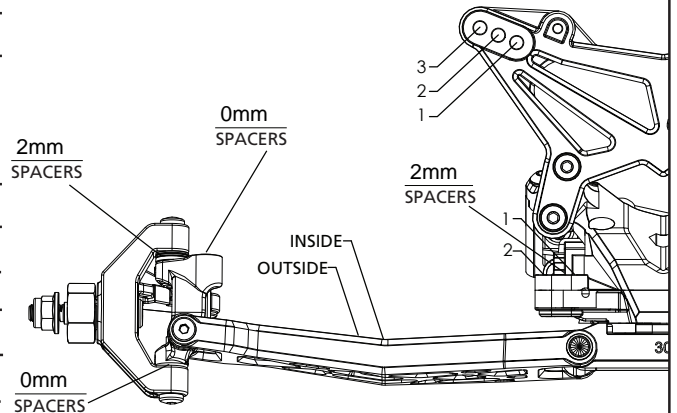

Notes: Aluminum Front Pivot (TLR1072), TLR Front Sway Bar Kit (TLR334001)

## Rear Suspension


Chassis Configuration: ☒ Rear Motor ☐ Mid Motor  
 Differential: ☒ Ball Diff ☐ Gear Diff Gear Diff Fluid: \_\_\_\_\_  
 Toe: 3.0 LRC  
 Anti-Squat: 2 degrees  
 Roll Center: ☒ Low Roll Center (LRC) ☐ High Roll Center (HRC)  
 Ride Height: 29mm (body on)  
 Camber: -1.5 degrees  
 Rear Hub Spacing: Forward (4mm rear)  
 Hex Width: +1.5mm (TLR2935)  
 Sway Bar: Yellow (1.2mm)  
 Shock Type: ☐ Bladder ☒ Emulsion Oil: 35wt Losi  
 Piston: 55 x 4  
 Spring: Pink (TLR5178)  
 Shock Limiters: 2mm  
 Camber Link: 1 - E  
 Shock Locations: 2 - Outside  
 Battery Position: Full Forward

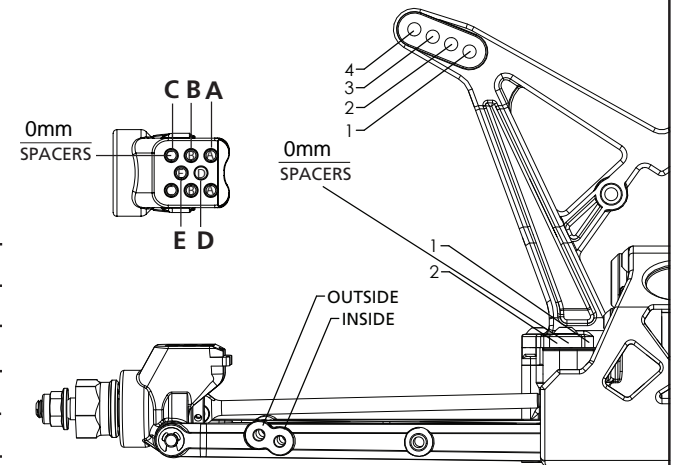

## Electronics

Radio: <u>DX3R Pro</u>	Timing Advance: <u>-</u>
Servo: <u>SPM S6040</u>	Throttle/Brake Expo: <u>-</u>
ESC: <u>Orion R10 Pro</u>	Servo Expo: <u>-</u>
Initial Brake: <u>Drag Br.</u>	Throttle/Brake EPA: <u>100/75</u>
Drag Brake: <u>10%</u>	Motor: <u>Orion Vortex 6.5T</u>
Throttle Profile: <u>5</u>	Pinion: <u>16</u> Spur: <u>86</u>
	Battery: <u>Carbon Pro 5000mAh 90C</u>

Weight Placement  
(Mark with "X")

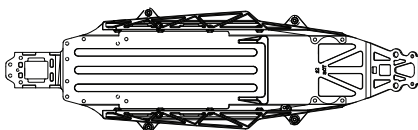

Weight of  
each piece \_\_\_\_\_ oz./g

Tires  
Front: Depends on Driver Compound \_\_\_\_\_ Insert \_\_\_\_\_ Additive \_\_\_\_\_

Rear: \_\_\_\_\_ Compound \_\_\_\_\_ Insert \_\_\_\_\_ Additive \_\_\_\_\_

Notes: Aluminum Rear Camber Block (TLR2060), TLR Rear Sway Bar Kit (TLR334002). Be sure to  
clearance hub for long and low 1-E link.