

Name: _____
Date: _____
Track: _____


Track Conditions

Size: ☐ Open ☐ Med. ☐ Tight
Traction: ☐ High ☐ Med. ☐ Low
Surface: ☐ Smooth ☐ Med. ☐ Bumpy

Result

Race Time / Lap: _____
Best Lap (1Lap): _____


Front Suspension




Rebound Stop: _____

Upright: ☐ E2129
☐ E2105-B
Tension Rod: ☐ E2107A(Long)
☐ E2107B(Short)


Upper Arm Position:

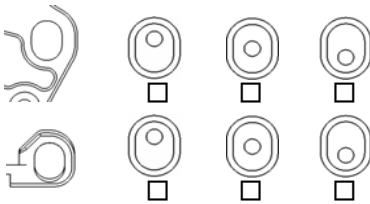

Ride Height: _____
Toe Angle: _____
Kingpin Ball Spacer(Upper): _____
(Lower): _____
Wheel Hub: _____
Anti Roll Bar: _____
Upper Arm Spacer: _____

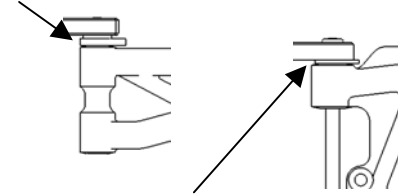

Lower Arm Spacer: _____
Lower Arm Position (Kick Up):

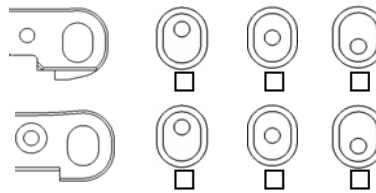


Front Shocks



Piston: _____
Oil: _____
Spring: _____


Shock Position:

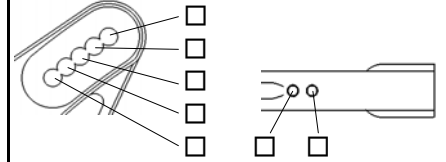


Pivot Ball Position: ☐ Front ☐ Rear
Damper Stay: ☐ E2502(Aluminum)
☐ E2511(CFRP)

Steering Ackerman

Front




Rear Suspension



Rebound Stop: _____


Upper Arm Position:




Lower Arm Position (Anti-Squat):



Ride Height: _____
Camber Angle: _____
Wheel Hub: _____
Anti Roll Bar: _____
Lower Arm Spacer: _____

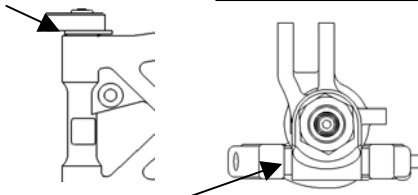

Upright Spacer: _____
Upright: ☐ E2131
☐ Other _____
Lower Arm Position (Toe Angle):

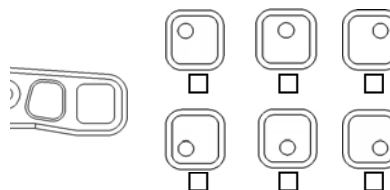


Rear Shocks




Piston: _____
Oil: _____
Spring: _____

Shock Position:

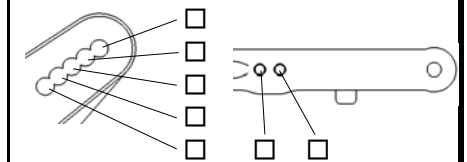

Pivot Ball Position: ☐ Front ☐ Rear
Damper Stay: ☐ E2522(Aluminum)
☐ E2523(CFRP)

Weight



Engine

Type: _____ Plug: _____
Gasket: _____ Reducer: _____
Muffler: _____ Fuel: _____
Engine Mount: ☐ E0701(Standard) ☐ E2701(One Piece)

Diff. Oil

Front: _____ O-Ring: _____ pcs.
Center: _____ pcs.
Rear: _____ pcs.

Tires

Front

Rear

Type: _____
Compound: _____
Inserts: _____
Wheel: _____


Clutch

Clutch Bell: _____ Spur Gear: _____
Clutch Shoes: _____
Clutch Spring: _____

Body/Wing

Wing Position:

Body: _____
Wing: _____



Comments

.....
.....
.....
.....