

**Name:** \_\_\_\_\_  
**Date:** \_\_\_\_\_  
**Track:** \_\_\_\_\_


**Track Conditions**

Size:  Open  Med.  Tight  
Traction:  High  Med.  Low  
Surface:  Smooth  Med.  Bumpy


**Result**

Race Time / Lap: \_\_\_\_\_  
Best Lap (1Lap): \_\_\_\_\_


### Front Suspension

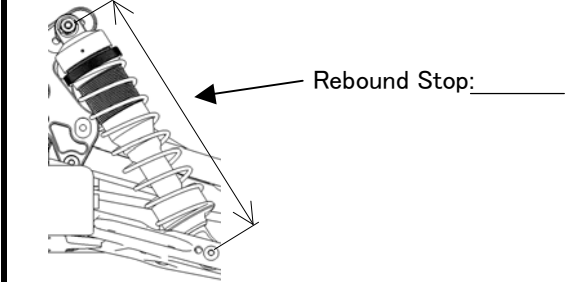

Upright:  E2129  
 E2105-B  
Tension Rod:  E2107A(Long)  
 E2107B(Short)

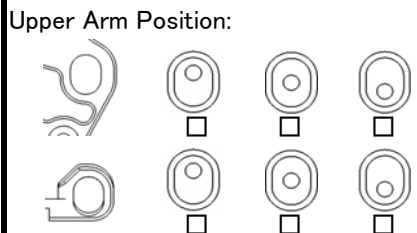


Ride Height: \_\_\_\_\_  
Toe Angle: \_\_\_\_\_  
Kingpin Ball Spacer(Upper): \_\_\_\_\_  
(Lower): \_\_\_\_\_  
Wheel Hub: \_\_\_\_\_  
Anti Roll Bar: \_\_\_\_\_  
Upper Arm Spacer: \_\_\_\_\_

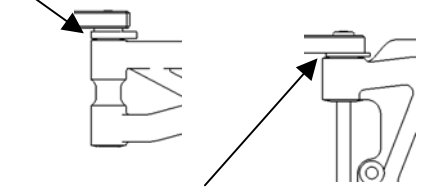

Lower Arm Spacer: \_\_\_\_\_  
Lower Arm Position (Kick Up):




### Front Shocks

Piston: \_\_\_\_\_  
Oil: \_\_\_\_\_  
Spring: \_\_\_\_\_

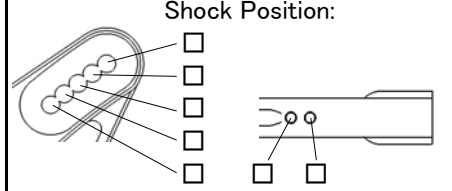


Pivot Ball Position:  Front  Rear  
Damper Stay:  E2502(Aluminum)  
 E2511(CFRP)


### Rear Suspension

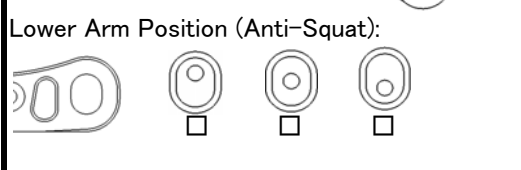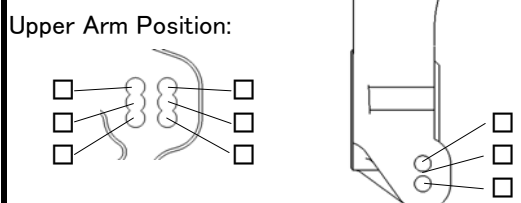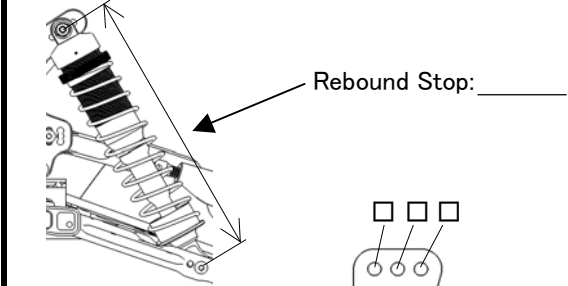

Ride Height: \_\_\_\_\_  
Camber Angle: \_\_\_\_\_  
Wheel Hub: \_\_\_\_\_  
Anti Roll Bar: \_\_\_\_\_  
Lower Arm Spacer: \_\_\_\_\_

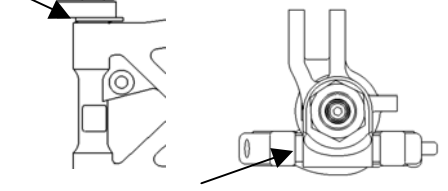


Upright Spacer:  
Upright:  E2131  
 Other \_\_\_\_\_  
Lower Arm Position (Toe Angle):

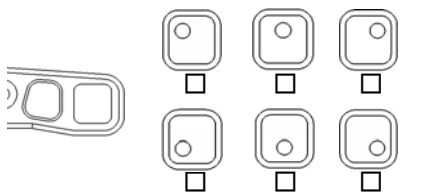


### Rear Shocks

Piston: \_\_\_\_\_  
Oil: \_\_\_\_\_  
Spring: \_\_\_\_\_

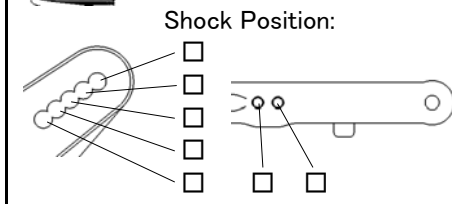

Pivot Ball Position:  Front  Rear  
Damper Stay:  E2522(Aluminum)  
 E2523(CFRP)

### Weight



### Engine

Type: \_\_\_\_\_ Plug: \_\_\_\_\_  
Gasket: \_\_\_\_\_ Reducer: \_\_\_\_\_  
Muffler: \_\_\_\_\_ Fuel: \_\_\_\_\_  
Engine Mount:  E0701(Standard)  E2701(One Piece)

### Diff. Oil

Front: \_\_\_\_\_ O-Ring: \_\_\_\_\_ pcs.  
Center: \_\_\_\_\_ pcs.  
Rear: \_\_\_\_\_ pcs.


### Tires

	Front	Rear
Type:	_____	_____
Compound:	_____	_____
Inserts:	_____	_____
Wheel:	_____	_____

### Clutch

Clutch Bell: \_\_\_\_\_ Spur Gear: \_\_\_\_\_  
Clutch Shoes: \_\_\_\_\_  
Clutch Spring: \_\_\_\_\_

### Body/Wing

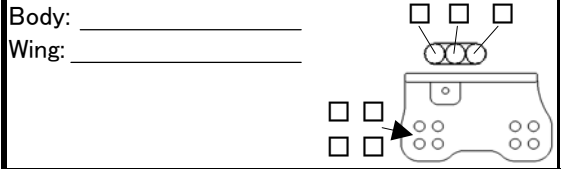

### Comments

.....  
.....  
.....  
.....