

Name: _____
 Date: _____
 Track: _____


Track Conditions

Size: Open Med. Tight
 Traction: High Med. Low
 Surface: Smooth Med. Bumpy


Result

Race Time / Lap: _____
 Best Lap (1Lap): _____

Front Suspension

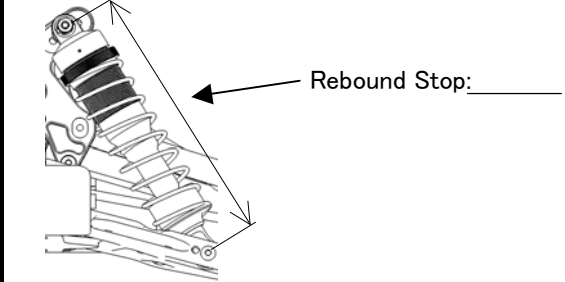


Upright: E2129
 E2105-B
 Tension Rod: E2107A(Long)
 E2107B(Short)

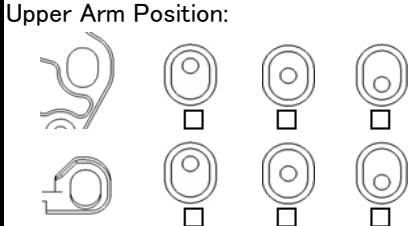


Ride Height: _____
 Toe Angle: _____
 Kingpin Ball Spacer(Upper): _____
 (Lower): _____

Wheel Hub: _____
 Anti Roll Bar: _____
 Upper Arm Spacer: _____

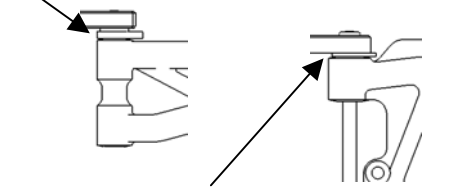


Lower Arm Spacer: _____
 Lower Arm Position (Kick Up): _____

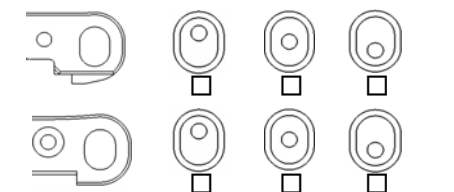




Front Shocks

Piston: _____
 Oil: _____
 Spring: _____

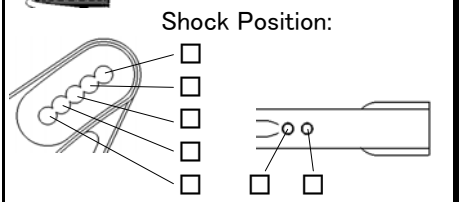


Pivot Ball Position: Front Rear
 Damper Stay: E2502(Aluminum)
 E2511(CFRP)


Rear Suspension

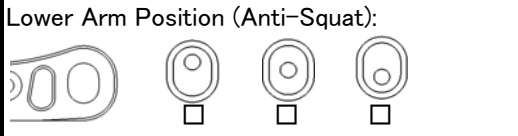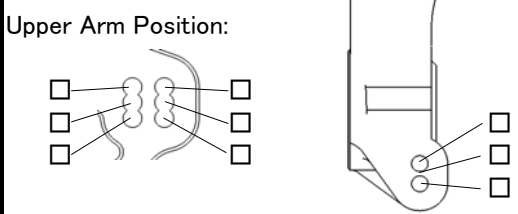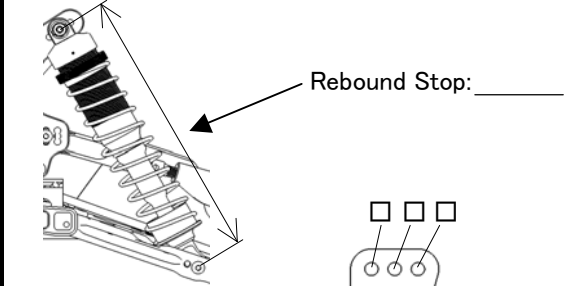

Ride Height: _____
 Camber Angle: _____
 Wheel Hub: _____
 Anti Roll Bar: _____
 Lower Arm Spacer: _____

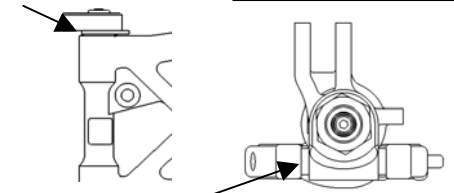


Upright Spacer: _____
 Upright: E2131
 Other _____
 Lower Arm Position (Toe Angle): _____

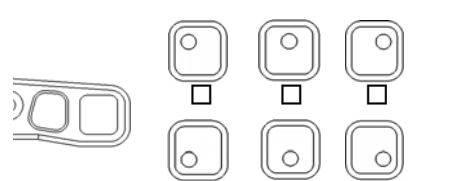

Rear Shocks

Piston: _____
 Oil: _____
 Spring: _____

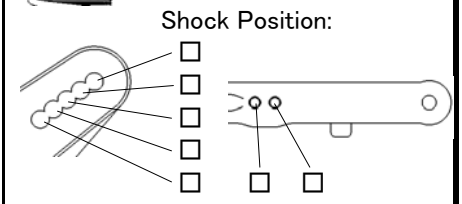

Pivot Ball Position: Front Rear
 Damper Stay: E2522(Aluminum)
 E2523(CFRP)

Power Train

Motor: _____
 ESC: _____
 Battery: _____

Diff. Oil

Front: _____ O-Ring: _____ pcs.
 Center: _____ pcs.
 Rear: _____ pcs.


Tires

	Front	Rear
Type:	_____	_____
Compound:	_____	_____
Inserts:	_____	_____
Wheel:	_____	_____

Gearing

Pinion Gear: _____ T
 Spur Gear: 44T(E0255) 46T(E0256)

Body/Wing

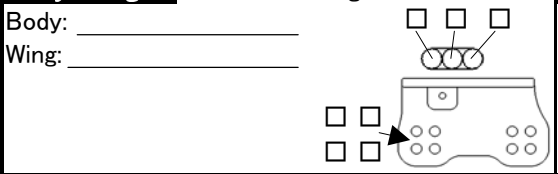

Comments

.....

Weight

