

## Driver and Event

Name  
Date  
Event  
Weather  
Result

## Track Conditions

Surface  
Grip Level  
Track Condition



## Electrics and Gearing

E.S.C  
Servo  
Receiver  
Batteries  
Motor  
Spur Gear 98T ☐ 95T ☐  
Pinion  
LH Cell Position  
Forward ☐ Backward ☐

## Wheels and Tyres

Rear Wheels  
Rear Tyre  
Rear Insert  
Front Wheels  
Front Tyre  
Front Insert

## Additional Settings

Car Weight  
Weights Added  
Chassis Carbon ☐ Option ☐  
Wing Gurney Height mm

## NOTES

## Front Shocks

Shock Cap Sealed ☐  
Oil ☐ Spring ☐ Vented ☐ Emulsion ☐  
Piston  
Drilled ☐ Hole Size mm




## Rear Shocks

Shock Cap Sealed ☐  
Oil ☐ Spring ☐ Vented ☐ Emulsion ☐  
Piston  
Drilled ☐ Hole Size mm



## Front Suspension

Anti roll bar No ☐ 1.00 ☐ 1.20 ☐ 1.40 ☐ 1.60 ☐

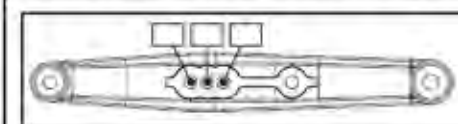

Track Washers mm



Blocks Moulded ☐ Alloy ☐

Camber at Ride Height Deg

Ride Height mm

Deg


Toe-In

Washers mm

Link Washers mm



Front Rake  
10.0 Deg ☐ 7.5 Deg ☐



Front Yoke  
(Kit)  
12.5 ☐ 10.0 ☐ 7.5 ☐

## Rear Suspension

Anti roll bar No ☐ 1.00 ☐ 1.20 ☐ 1.40 ☐ 1.60 ☐

Wheelbase Short ☐ Med ☐ Long ☐

## Rear Toe-in &amp; Track Washers

0.00 Difference = 0.00° Toe-in ☐  
0.50 Difference = 0.60° Toe-in ☐  
1.00 Difference = 1.30° Toe-in ☐  
1.50 Difference = 1.95° Toe-in ☐  
2.00 Difference = 2.60° Toe-in ☐  
2.50 Difference = 3.25° Toe-in ☐  
3.00 Difference = 3.90° Toe-in ☐

Rear mm Front mm



Blocks Moulded ☐ Alloy ☐

Camber at Ride Height Deg


Ride Height mm

Deg


## Anti-squat Washers

0.00 Difference = 0.00° Anti-squat ☐  
0.50 Difference = 0.60° Anti-squat ☐  
1.00 Difference = 1.30° Anti-squat ☐  
1.50 Difference = 1.95° Anti-squat ☐  
2.00 Difference = 2.60° Anti-squat ☐  
2.50 Difference = 3.25° Anti-squat ☐  
3.00 Difference = 3.90° Anti-squat ☐

Rear mm Front mm



Link Washers mm

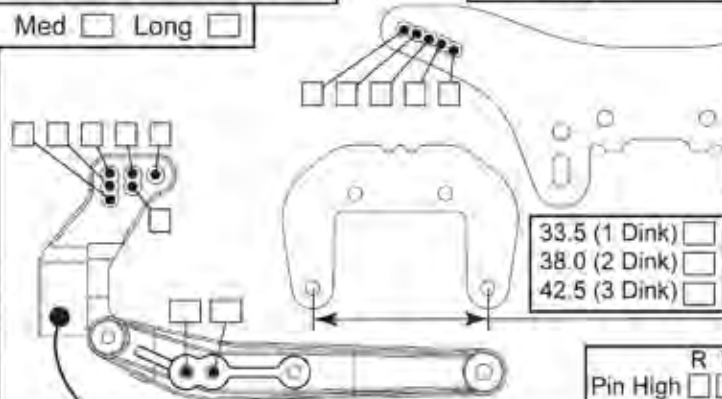

Rear Hub Carrier Alloy ☐ Std ☐

Alloy Hub Carrier +1° ☐ -1° ☐

R F  
Pin High ☐  
Pin Low ☐