

## Driver and Event

Name Tom Cockerill  
Date July '14  
Event Belgium GP  
Weather Wet/Damp  
Result TQ & Win

## Track Conditions

Surface 90% Astro / 10% Paving  
Grip Level Low  
Track Condition Smooth, Wet



## Electrics and Gearing

E.S.C Nosram Comet HD  
Servo KO RSx2 Response  
Receiver KO  
Batteries Nosram 5800 Saddle  
Motor Nosram Pure 2 6.5  
Spur Gear 98T ☐ 95T ☒  
Pinion 17  
LH Cell Position  
Forward ☐ Backward ☒

## Wheels and Tyres

Rear Wheels Schumacher Hex (U4366)  
Rear Tyre Sch MiniSpike (U6763)  
Rear Insert Sch Medium (U6734)  
Front Wheels Schumacher Hex (U4496)  
Front Tyre Sch SMiniSpike (U6762)  
Front Insert Sch Medium (U6733)

## Additional Settings

Car Weight 1825g  
Weights Added None  
Chassis Carbon ☐ Option ☒  
Wing Gurney Height Low Line mm

## NOTES

CoreRC Springs & Oils  
Alloy Chassis (U4147)  
F.A.B. (U4133)  
7.5Deg Yokes (U3404)

## Diff Type

| Diff Type |                                                                        | Diff Oil |
|-----------|------------------------------------------------------------------------|----------|
| Front     | Ball <input type="checkbox"/> Gear <input checked="" type="checkbox"/> | 10,000   |
| Rear      | Ball <input type="checkbox"/> Gear <input checked="" type="checkbox"/> | 10,000   |

## Front Shocks

Oil 500 Spring Red Shock Cap Sealed ☐  
Vented ☐ Emulsion ☒

Piston 3 Hole

Drilled ☐ Hole Size Std mm

Shock Length

21.35 mm

## Rear Shocks

Oil 400 Spring Red Shock Cap Sealed ☐  
Vented ☐ Emulsion ☒

Piston 3 Hole

Drilled ☒ Hole Size 1.60 mm

Shock Length

28.40 mm

## Front Suspension


Anti roll bar No ☒ 1.00 ☐ 1.20 ☐ 1.40 ☐ 1.60 ☐

Camber at Ride Height -1.0 Deg


Toe-In -1.0 Deg

Ride Height 21 mm


Washers 2.0 mm



Track Washers 1.0 mm



Blocks Moulded ☐ Alloy ☒

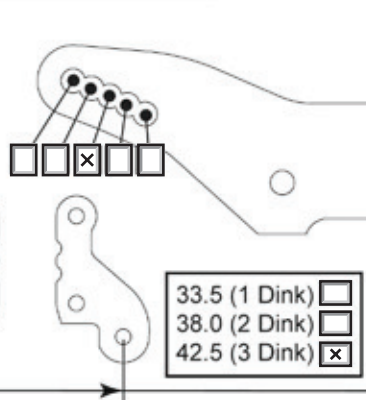


33.5 (1 Dink) ☐  
38.0 (2 Dink) ☐  
42.5 (3 Dink) ☒

Link Washers 0 mm



Front Rake  
10.0 Deg ☒ 7.5 Deg ☐



Front Yoke

(Kit)  
12.5 ☐ 10.0 ☐ 7.5 ☒

## Rear Suspension

Anti roll bar No ☐ 1.00 ☐ 1.20 ☒ 1.40 ☐ 1.60 ☐

Camber at Ride Height -2.0 Deg

Ride Height 22 mm

Wheelbase Short ☐ Med ☐ Long ☒


## Rear Toe-in & Track Washers

0.00 Difference = 0.00° Toe-in ☐  
0.50 Difference = 0.60° Toe-in ☐  
1.00 Difference = 1.30° Toe-in ☐  
1.50 Difference = 1.95° Toe-in ☐  
2.00 Difference = 2.60° Toe-in ☐  
2.50 Difference = 3.25° Toe-in ☐  
3.00 Difference = 3.90° Toe-in ☐

Rear 3.0 mm Front 0.5 mm



Blocks Moulded ☐ Alloy ☒

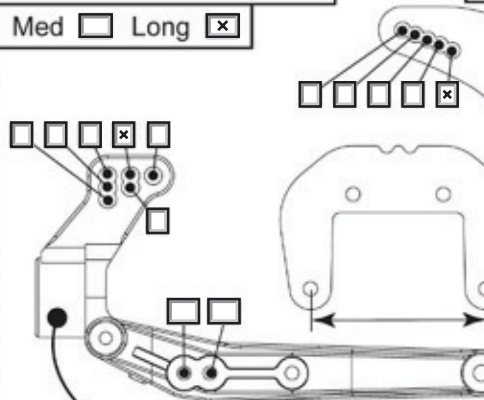

33.5 (1 Dink) ☐  
38.0 (2 Dink) ☐  
42.5 (3 Dink) ☒

R F  
Pin High ☐ ☒  
Pin Low ☒ ☐


Rear Hub Carrier Alloy ☐ Std ☒

Alloy Hub Carrier +1° ☐ -1° ☐

## Anti-squat Washers

0.00 Difference = 0.00° Anti-squat ☐  
0.50 Difference = 0.60° Anti-squat ☐  
1.00 Difference = 1.30° Anti-squat ☐  
1.50 Difference = 1.95° Anti-squat ☐  
2.00 Difference = 2.60° Anti-squat ☐  
2.50 Difference = 3.25° Anti-squat ☐  
3.00 Difference = 3.90° Anti-squat ☐

Rear 0 mm Front 3.50 mm



Link Washers 3.0 mm