

Driver & Event	
Name	Phil dRC.com
Date	
Event	
Weather	
Result	

Electrics & Chassis	
E.S.C	HW V3.1 beta 129 software
Servo	KO
Receiver	Sanwa
Batteries	Fantom Shorty 5000
Shorty Position	Front <input type="checkbox"/> Back <input checked="" type="checkbox"/>
Transverse Shorty	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
Chassis Stiffeners	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
Chassis	Alloy <input checked="" type="checkbox"/> Carbon <input type="checkbox"/>


Motor & Gearing	
Motor	5.5
Rotor Diameter	stock
Timing	5°
Spur	83
Pinion	20


Track Conditions	
Grip Level	High <input checked="" type="checkbox"/> Med <input type="checkbox"/> Low <input type="checkbox"/>
Type	Tight <input type="checkbox"/> Open <input type="checkbox"/> Mixed <input checked="" type="checkbox"/>
Surface	Clay <input checked="" type="checkbox"/> Astro <input type="checkbox"/> Grass <input type="checkbox"/> Mixed <input type="checkbox"/> Carpet <input type="checkbox"/>
Condition	Smooth <input type="checkbox"/> Bumpy <input checked="" type="checkbox"/>

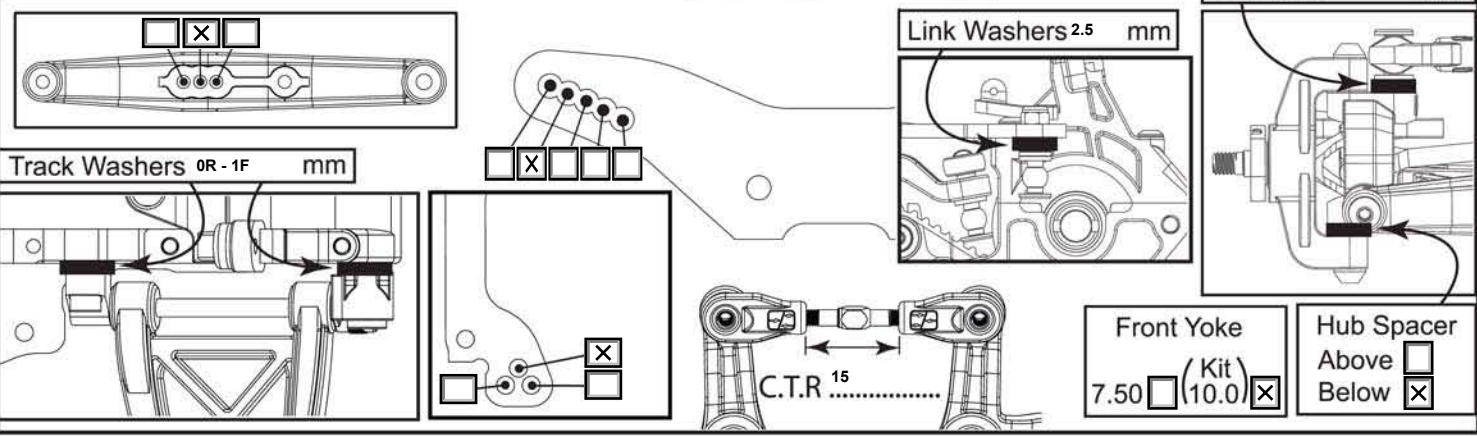
Wheels & Tyres	
Rr Tyre	MC Prime
Rr Wheel	U4366
Rr Insert	Black AKA
Fr Tyre	MC PRime
Fr Wheel	U4496
Fr Insert	Black AKA

Notes	
Car weight	1720 g
Wing Gurney Height	Full mm
U3556 Front Blocks	
inner steering link is spaced down 4mm	
1mm bumpsteer	
U4025 rear axles	

Diff Type	
Front	Ball <input type="checkbox"/> Gear <input checked="" type="checkbox"/> 12k
Rear	Ball <input type="checkbox"/> Gear <input checked="" type="checkbox"/> 10k

Front Shocks	
Oil	600 Green
Spring	Sealed <input type="checkbox"/> Vented <input type="checkbox"/> Emulsion <input checked="" type="checkbox"/>
Shock Cap	Sealed <input type="checkbox"/> Vented <input type="checkbox"/> Emulsion <input checked="" type="checkbox"/>
Piston	W - 3 hole Drilled <input type="checkbox"/> Hole Size 1.5 mm
 Shock Length 24mm	

Rear Shocks	
Oil	500 Red
Spring	Sealed <input type="checkbox"/> Vented <input type="checkbox"/> Emulsion <input checked="" type="checkbox"/>
Shock Cap	Sealed <input type="checkbox"/> Vented <input type="checkbox"/> Emulsion <input checked="" type="checkbox"/>
Piston	B - 3 hole Drilled <input type="checkbox"/> Hole Size 1.6 mm
 Shock Length 29.5	

Front Suspension	
Anti roll bar	No <input checked="" type="checkbox"/> 1.4 <input type="checkbox"/> 1.6 <input type="checkbox"/> 1.8 <input type="checkbox"/> 2.0 <input type="checkbox"/>
Camber at Ride Height	2.0 Deg
Toe-In	0 Deg
Ride Height	23 mm
Washers	3 mm
Link Washers	2.5 mm
Track Washers	OR - 1F mm
Front Yoke	7.50 (Kit) <input checked="" type="checkbox"/> 10.0 <input type="checkbox"/>
Hub Spacer	Above <input type="checkbox"/> Below <input checked="" type="checkbox"/>
	

Rear Suspension	
Anti-squat	0° <input type="checkbox"/> 3° <input checked="" type="checkbox"/> 1° <input type="checkbox"/> 4° <input type="checkbox"/> 2° <input type="checkbox"/>
High Pin	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
Wheelbase	Short <input type="checkbox"/> Med <input checked="" type="checkbox"/> Long <input type="checkbox"/>
Anti roll bar	No <input type="checkbox"/> 1.0 <input type="checkbox"/> 1.2 <input type="checkbox"/> 1.4 <input checked="" type="checkbox"/> 1.6 <input type="checkbox"/> 1.8 <input type="checkbox"/>
Link Washers	3 mm
Rear Hub Carrier	Alloy <input type="checkbox"/> Std <input checked="" type="checkbox"/>
Alloy Hub Carrier	+1° <input type="checkbox"/> -1° <input type="checkbox"/>
Rear Wishbones	Kit <input checked="" type="checkbox"/> Reversed <input type="checkbox"/>
Med Flex	<input type="checkbox"/>
Alloy	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
Rear Ride Height	22.5 mm
Rear Camber at Ride Height	1.5 Deg
Rear Toe In	(Flats IN 2.5°) <input type="checkbox"/> (Flats OUT 3.0°) <input checked="" type="checkbox"/>
