

Driver and Event	
Name	Tom Cockerill
Date	N/A
Event	Workshop
Weather	N/A
Result	N/A
Track Conditions	
Grip Level	Medium-Low
Surface	Rubber Floor
Track Condition	

Temperature	
Electrics	
E.S.C	Speed Passion GT 2.0 Pro
Servo	GM 790
Receiver	KO
Li-Po	Speed Power 4200
Motor	Speed Passion V3.0 5.5R
Spur	83
Pinion	23
Internal Ratio	2.9:1

Wheels - Tyres - Inserts	
Front Wheels	Sch RevLite
Front Inserts	Sch Medium
Front Tyres	Sch Yellow Minipin
Rear Wheels	Sch RevLite
Rear Inserts	Sch Medium
Rear Tyres	Sch Yellow Minipin

Transmission	
Rear Diff Height	Low
Front Diff Height	Low
Front Layshaft Pulley	
One Way	<input type="checkbox"/> Fixed <input checked="" type="checkbox"/> F.A.B <input type="checkbox"/>
Front Drive	Standard
Front Overdrive	Standard





Chassis	
Carbon Fibre	<input checked="" type="checkbox"/> S1 <input type="checkbox"/>

Notes	
-------	--

Rear Suspension	
Pivot Pin Height	High <input type="checkbox"/> Low <input checked="" type="checkbox"/>
Wheelbase	Short <input type="checkbox"/> Medium <input type="checkbox"/> Long <input checked="" type="checkbox"/>
Roll Bar	No <input type="checkbox"/> 1.2 <input type="checkbox"/> 1.4 <input checked="" type="checkbox"/> 1.6 <input type="checkbox"/>

Equal Washers = 0° Toe-in
 0.50 Difference = 0.65° Toe-in
 1.00 Difference = 1.30° Toe-in
 1.50 Difference = 1.95° Toe-in
 2.00 Difference = 2.60° Toe-in
 2.50 Difference = 3.25° Toe-in
 3.00 Difference = 3.90° Toe-in


Toe-in / Rear Track Washers		
Rear 0 mm	Front 0.5 mm	Actual 2.6 °

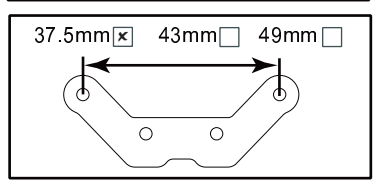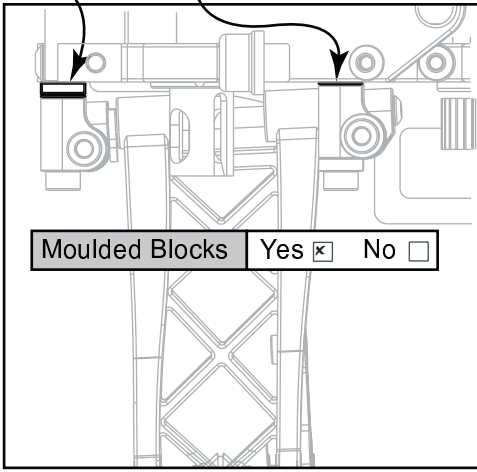


Note: The Anti-Squat Angle is worked out using the Toe-in Chart as the washers produce the same angles.

Front Suspension	
------------------	--


Front Track Washers	
Rear 0 mm	Front 0 mm

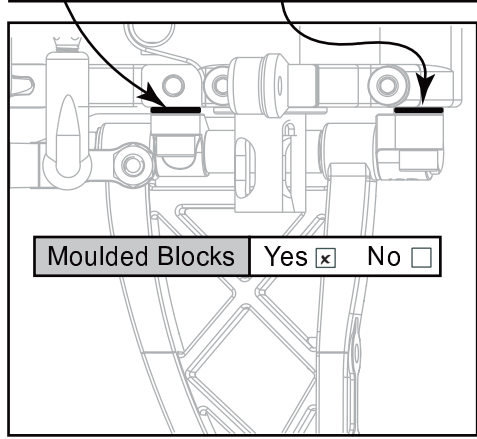

Roll Bar	No <input checked="" type="checkbox"/> 1.2 <input type="checkbox"/> 1.4 <input type="checkbox"/> 1.6 <input type="checkbox"/>
----------	---






Washers	2.0 mm
---------	--------

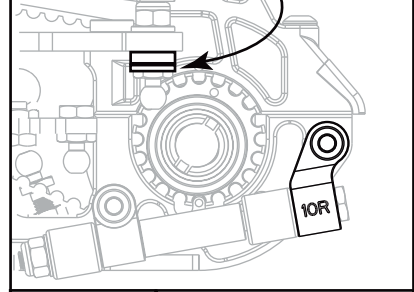

Front Rake	10 Deg <input checked="" type="checkbox"/> 7.5 Deg <input type="checkbox"/>
------------	---

Washers	2.0 mm
---------	--------




Rear Shocks	
-------------	--

Oil	Core 400	Springs	2.0R
-----	----------	---------	------

Piston Holes	2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input checked="" type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/>
--------------	---

Diaphragm Spec	HD (U3782)
----------------	------------



Front Shocks	
--------------	--

Oil	Core 400	Springs	4.0F
-----	----------	---------	------

Piston Holes	2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input checked="" type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/>
--------------	---

Diaphragm Spec	HD (U3782)
----------------	------------

