

Driver & EventName *Michal Orlowski*Date *19 September 2015*Event *EOS 2016 R1, Nurburgring, DE*Weather *Indoor 19°C*Result *Q3 and A2***Track Conditions**Grip Level High ☒ Med ☐ Low ☐Type Tight ☒ Open ☐ Mixed ☐Surface Clay ☐ Astro ☐ Grass ☐Mixed ☐ Carpet ☒Condition Smooth ☒ Bumpy ☐**Diff Type**Ball ☐Gear ☒Diff Oil *20000 Core-RC***Electrics & Chassis**E.S.C *LRP Flow 3.7*Servo *Sanwa ERS-962*Receiver *Sanwa RX-471*Batteries *LRP Shorty 4700*Shorty Conversion Yes ☐ No ☒Low Grip Conversion Yes ☒ No ☐Chassis Alloy ☐ Carbon ☒**Wheels & Tyres**Rr Tyre *Yellow MiniPin Pre-Glued (U6792)*Rr Wheel *Sch. Hex (U4366)*Rr Insert *Medium (U6734)*Fr Tyre *Yellow Cut Stagger Pre-Glued (U6801)*Fr Wheel *Sch. Hex Slim (U4661)*Fr Insert *None***Motor & Gearing**Motor *SP 6.5T V4*Rotor Diameter *kit*Timing *20**Spur *83*Pinion *23***Notes**Car weight *1580 g*Wing Gurney Height *below lower line* mm

*Extremely high grip conditions.
Low grip conversion, shorty lipo
Rear Mounted Rear Shocks (U4616),
Alloy 5 Deg Front Yokes (U4228),
SV2 Arms (U4055),
Rear ARB (U4172),
One inside row and outside row rear
pins cut.*

Front ShocksOil *450 Core RC**Red Core RC*


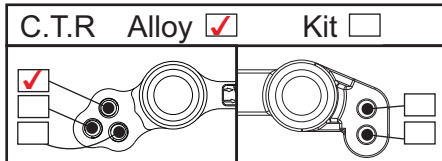


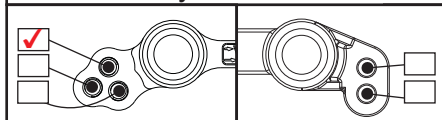
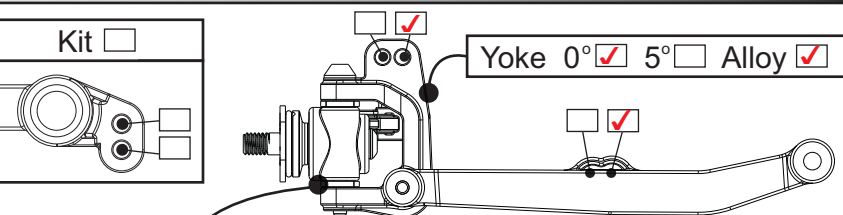

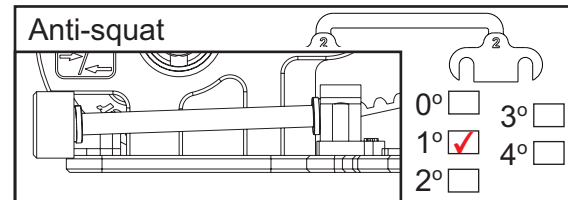
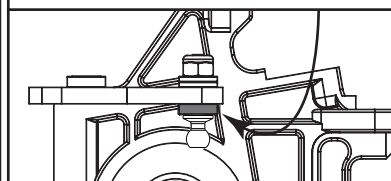
Spring

Shock Cap


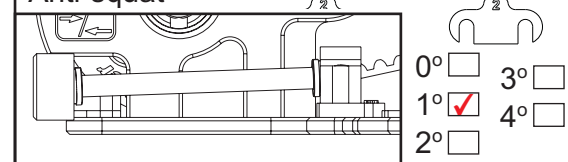
Sealed ☐Vented ☐Emulsion ☒Piston *3 hole*Drilled ☐Hole Size *Std* mmShock Length
.....*19.8* mm**Rear Shocks**Oil *450 Core RC**Blue Core RC*

Spring

Shock Cap

Sealed ☐Vented ☐Emulsion ☒Piston *3 hole*Drilled ☒Hole Size *1.6* mmShock Length
.....*27.2* mm**Front Suspension**Link Washers *1.0* mmC.T.R. Alloy ☒ Kit ☐Front Ride Height *16.0* mmFront Camber at Ride Height *-1.5* DegFront Toe In *0* DegHub Carrier Alloy ☐
High ☐ Middle ☐ Low ☒Front Wishbones
Kit ☒ Reversed ☒
Med Flex ☐Alloy ☐ 50.50 ☒ 42.50 ☐60.0 ☐ 50.5 ☐ 45.5 ☐ 40.5 ☐**Rear Suspension**Link Washers *3.0* mm

Anti-squat

Rear Hub Carrier Alloy ☐ Std ☒
Alloy Hub Carrier +1° ☐ -1° ☐Rear Wishbones
Kit ☐ Reversed ☐
Med Flex ☐

Wheelbase


Short ☒Med ☐Long ☐

Anti roll bar

No ☐1.00 ☒1.20 ☐1.40 ☐1.60 ☐

Link Washers

mm

Alloy Yes ☐ No ☒33.5 ☐42.5 ☒Rear Ride Height *16.0* mmRear Camber at Ride Height *-1.0* DegRear Toe In (Flats **IN** 2.5°) ☒ (Flats **OUT** 3.0°) ☐☒ 33.5 (1 Dink)☐ 38.0 (2 Dink)☐ 42.5 (3 Dink)