

Driver & Event	
Name	TRISH NEAL
Date	TESTING
Event	RHR
Weather	RAIN
Result	

Electrics & Chassis	
E.S.C	HOBBY WING
Servo	KO
Reciever	KO
Batteries	THUNDER POWER
Shorty Conversion	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
Low Grip Conversion	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
Chassis	Alloy <input checked="" type="checkbox"/> Carbon <input type="checkbox"/>

Motor & Gearing	
Motor	8.5
Rotor Diameter	STD
Timing	STD
Spur	76
Pinion	24


Track Conditions	
Grip Level	High <input type="checkbox"/> Med <input type="checkbox"/> Low <input checked="" type="checkbox"/>
Type	Tight <input type="checkbox"/> Open <input type="checkbox"/> Mixed <input checked="" type="checkbox"/>
Surface	Clay <input type="checkbox"/> Astro <input checked="" type="checkbox"/> Grass <input type="checkbox"/> Mixed <input type="checkbox"/> Carpet <input type="checkbox"/>
Condition	Smooth <input type="checkbox"/> Bumpy <input checked="" type="checkbox"/>

Wheels & Tyres	
Rr Tyre	MINISPIKE
Rr Wheel	STD
Rr Insert	MEDIUM
Fr Tyre	STAGGER
Fr Wheel	SLIM
Fr Insert	NONE

Notes	
Car weight	1653 g
Wing Gurney Height	MID mm
CORE SPRINGS	
CORE OILS	


Diff Type	
Ball <input checked="" type="checkbox"/> Gear <input type="checkbox"/>	Diff Oil

Front Shocks	
Oil 400	Spring RED
Shock Cap Sealed <input type="checkbox"/>	Vented <input type="checkbox"/> Emulsion <input checked="" type="checkbox"/>
Piston STD	Drilled <input type="checkbox"/> Hole Size mm



Shock Length **STD**mm


Rear Shocks	
Oil 400	Spring RED
Shock Cap Sealed <input type="checkbox"/>	Vented <input type="checkbox"/> Emulsion <input checked="" type="checkbox"/>
Piston STD	Drilled <input type="checkbox"/> Hole Size mm



Shock Length **STD**mm

Front Suspension

Link Washers 1.0 mm

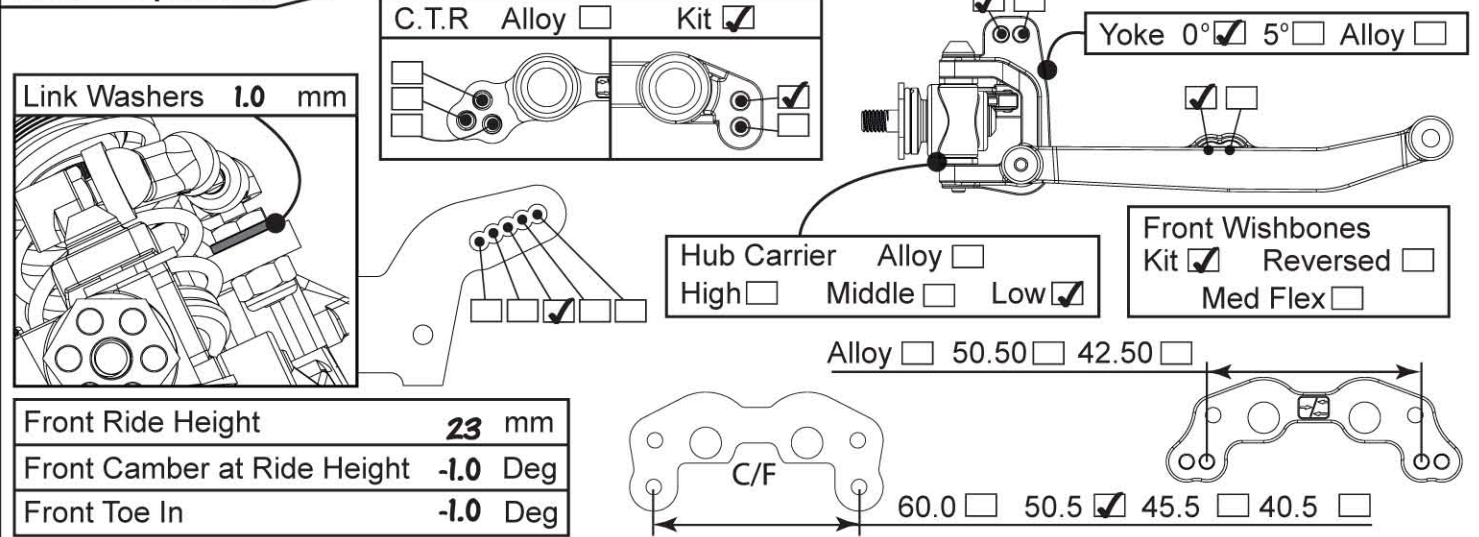

C.T.R Alloy Kit

Yoke 0° 5° Alloy

Hub Carrier Alloy High Middle Low

Front Wishbones Kit Reversed Med Flex


Alloy 50.50 42.50

C/F 60.0 50.5 45.5 40.5

Front Ride Height	23 mm
Front Camber at Ride Height	-1.0 Deg
Front Toe In	-1.0 Deg

Rear Suspension

Link Washers 2.0 mm

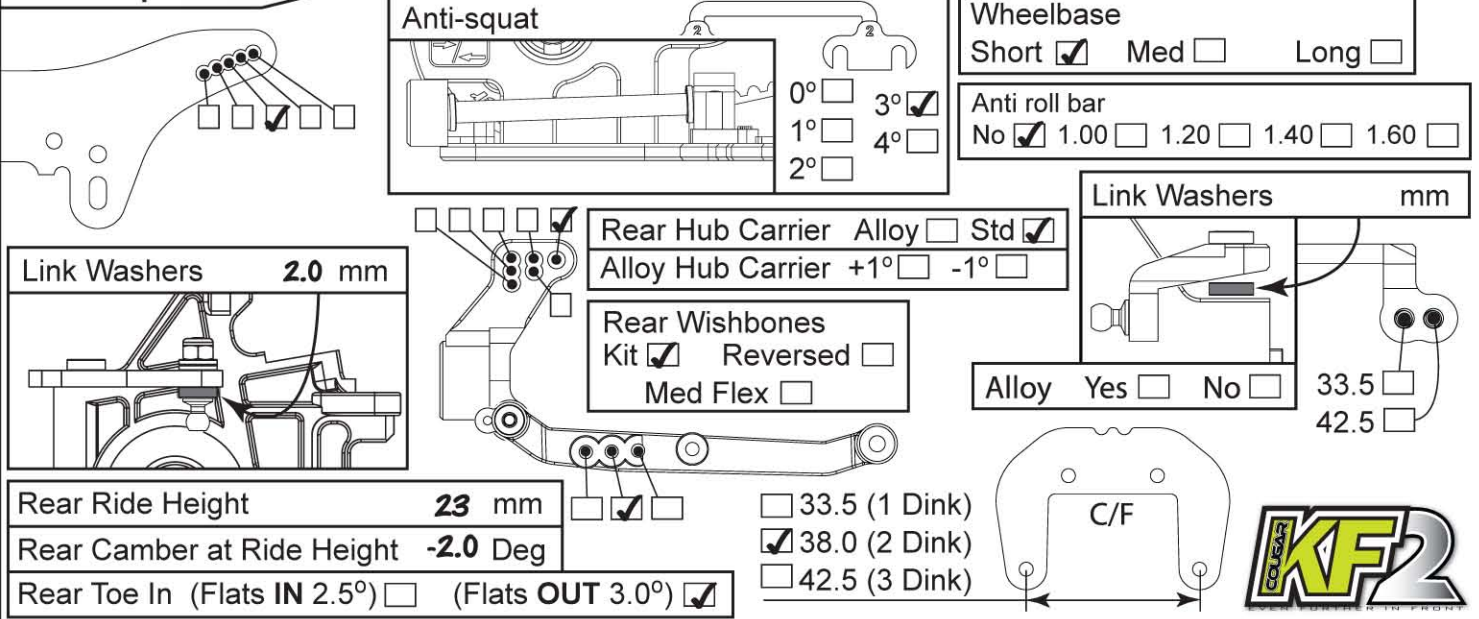

Anti-squat 0° 3° 1° 4° 2°

Wheelbase Short Med Long

Anti roll bar No 1.00 1.20 1.40 1.60

Rear Hub Carrier Alloy Std Alloy Hub Carrier +1° -1°

Rear Wishbones Kit Reversed Med Flex

Link Washers mm Alloy Yes No 33.5 42.5

C/F 33.5 (1 Dink) 38.0 (2 Dink) 42.5 (3 Dink)

Rear Ride Height	23 mm
Rear Camber at Ride Height	-2.0 Deg
Rear Toe In (Flats IN 2.5°) <input type="checkbox"/> (Flats OUT 3.0°) <input checked="" type="checkbox"/>	

