

Driver and Event

Name *David Poulter*Date *8th November 2014*Event *Maritime Off Road Wars*Weather *Indoor*Result *Q6 & F4*

Electrics and Gearing

E.S.C *Orion 10.1*Servo *Orion*Receiver *Sanwa*Batteries *Orion 4500 Shorty*Motor *Orion VST2 7.5T*Spur *Kit*Pinion *25*Side Gears ☒ 23T/33T Kit ☐ 21T/35T ☐ 25T/31T

Track Conditions

Surface *Carpet & Wood*Grip Level *High*

Track Condition

Wheels and Tyres

Rear Wheels *Schumacher*Rear Tyre *Sch MiniPin Yellow*Rear Insert *Mr O Foams*Front Wheels *Schumacher*Front Tyre *Sch Cut Stagger*Front Insert *None*

Diff Type

Diff Oil

Ball ☒ Gear ☐**COUGAR^{KF}**

Alterations by Arn0 at Petitr.com

Additional Settings

Car Weight

Washers Between

CTR and Bellcranks mm

Bump Steer Washers *3.0* mmWing Gurney Height *5.0* mm

NOTES

*SV2 Rear Wishbones**Alloy Steering Rack**Under Lipo Weight**Kit Wing**Nose Weight**Alloy Chassis**LG Setup**Rear Wishbones = Middle Hole*

Front Shocks

Oil *600*Spring *Core Green*Shock Cap Sealed ☐Vented ☐ Emulsion ☒Piston *Std*Drilled ☐ Hole Size mm

Shock Length mm

Rear Shocks

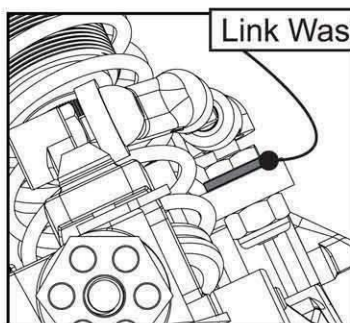
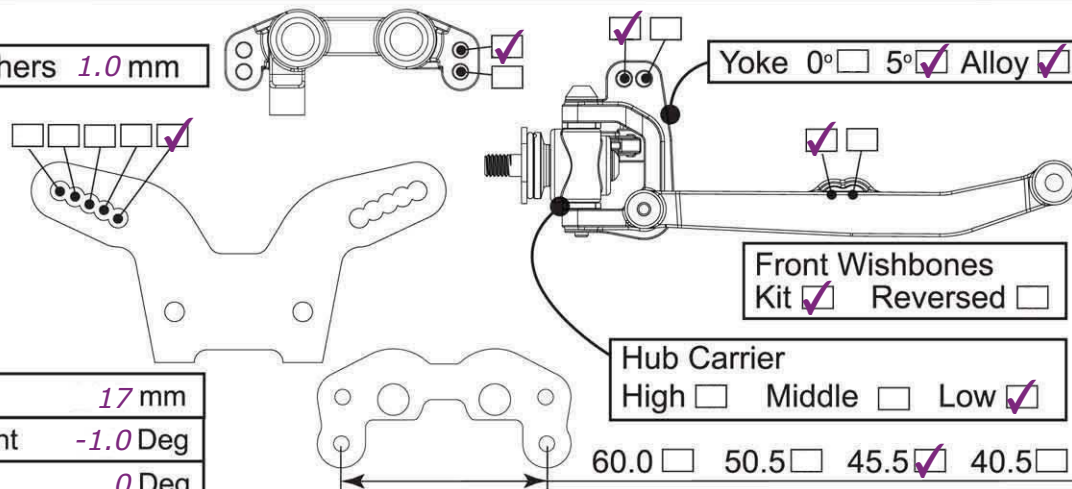
Oil *450*Spring *Core Green*Shock Cap Sealed ☐Vented ☐ Emulsion ☒

Piston

Drilled ☒ Hole Size *1.65* mm

Shock Length mm

Front Suspension


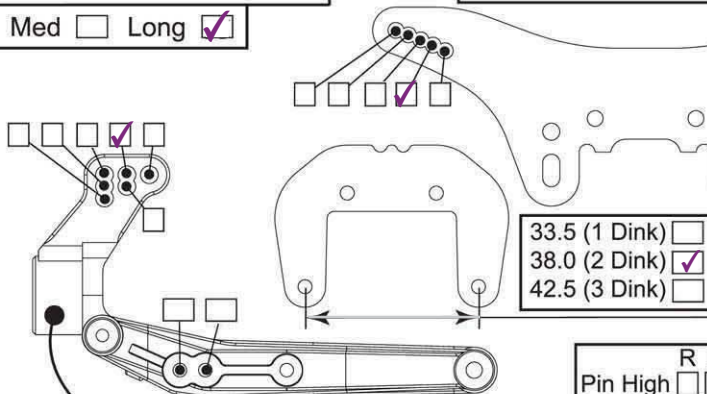
Link Washers *1.0* mmYoke 0° ☐ 5° ☒ Alloy ☒Front Wishbones
Kit ☒ Reversed ☐Hub Carrier
High ☐ Middle ☐ Low ☒Front Ride Height *17* mmFront Camber at Ride Height *-1.0* DegFront Toe In *0* Deg

Rear Suspension

*Shocks on Rear*Anti roll bar No ☐ 1.00 ☐ 1.20 ☒ 1.40 ☐ 1.60 ☐Wheelbase Short ☐ Med ☐ Long ☒

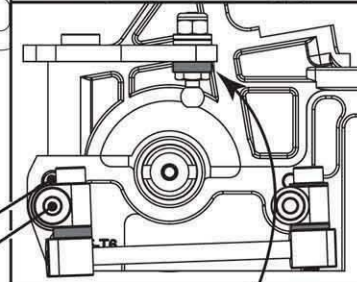
Rear Toe-in & Track Washers

- 0.00 Difference = 0.00° Toe-in ☐
 0.50 Difference = 0.60° Toe-in ☐
 1.00 Difference = 1.30° Toe-in ☐
 1.50 Difference = 1.95° Toe-in ☐
 2.00 Difference = 2.60° Toe-in ☐
 2.50 Difference = 3.25° Toe-in ☒
 3.00 Difference = 3.90° Toe-in ☐

Rear *2.5* mm Front *0.0* mmBlocks Moulded ☐ Alloy ☒Camber at Ride Height *-1.0* DegRide Height *18* mm33.5 (1 Dink) ☐
38.0 (2 Dink) ☒
42.5 (3 Dink) ☐Rear Hub Carrier Alloy ☐ Std ☒Alloy Hub Carrier +1° ☐ -1° ☐

Anti-squat Washers

- 0.00 Difference = 0.00° Toe-in ☐
 0.50 Difference = 0.60° Toe-in ☐
 1.00 Difference = 1.30° Toe-in ☐
 1.50 Difference = 1.95° Toe-in ☐
 2.00 Difference = 2.60° Toe-in ☐
 2.50 Difference = 3.25° Toe-in ☐
 3.00 Difference = 3.90° Toe-in ☐

Rear *0.0* mm Front *3.5* mmLink Washers *2.0* mm