

Driver and Event

Name
Date
Event
Weather
Result

Track Conditions

Surface
Grip Level
Track Condition

COUGAR
Designed for Dirt! **SVR**

Wheels and Tyres

Rear Wheels
Rear Tyre
Rear Insert
Front Wheels
Front Tyre
Front Insert
Tyre Modifications

Diff Type

Ball ☐ Gear ☐

Additional Settings

Car Weight
Weights Added
Weight Distribution
Ride Height Front mm Rear mm
Washers between CTR and Bellcranks mm
Chassis Alloy ☐ Carbon ☐
NOTES

Electrics and Gearing

E.S.C
Servo
Receiver
Batteries
Motor
Spur
Pinion
Cell Position

Rear Shocks

Oil Spring Ball Socket Short ☐ Long ☐
Piston Holes 2 ☐ 3 ☐ 4 ☐ 5 ☐ 6 ☐
Drilled ☐ Hole Size Shock Length



Front Shocks

Oil Spring Piston Holes 2 ☐ 3 ☐ 4 ☐ 5 ☐ 6 ☐
Drilled ☐ Hole Size Shock Length



Rear Suspension

Anti roll bar No ☐ 1.20 ☐ 1.40 ☐ 1.60 ☐

Toe-In 2° ☐ 3° ☐


Link Washers mm

AntiSquat 3° ☐ 2° ☐ 1° ☐ 0° ☐

Link Washers mm

Wheelbase Short ☐ Med ☐ Long ☐

Rear Camber at Ride Height

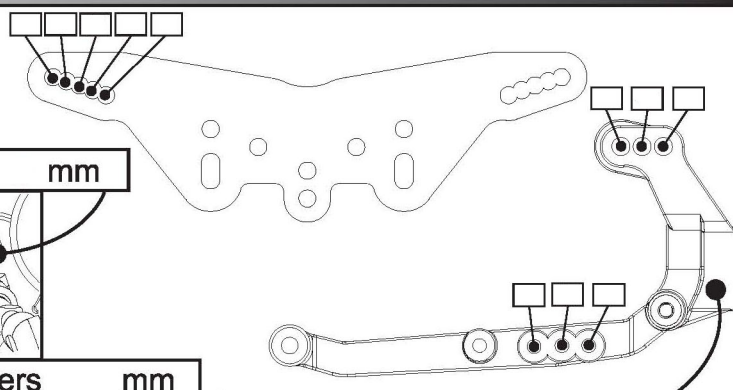

Rear Hub Carrier Alloy ☐ Std ☐

Alloy Hub Carrier +1° ☐ -1° ☐

49 ☐ 44 ☐ 39 ☐ 34 ☐

Front Suspension

Editable : Arn0 at Petitr.com


Link Washers mm

Yoke 0° ☐ 5° ☐ 7.5° ☐

Hub Carrier High ☐ Low ☐
Zero Trail (Alloy) ☐

Front Camber at Ride Height

Front Toe In

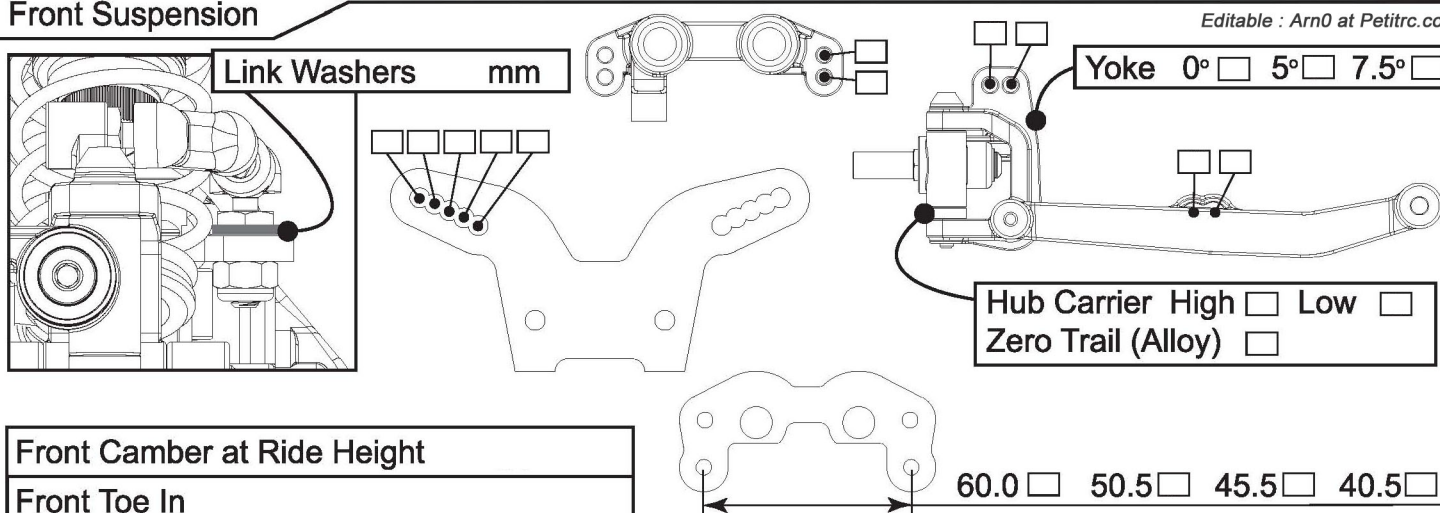

60.0 ☐ 50.5 ☐ 45.5 ☐ 40.5 ☐