



2013 COBBLE

Paul Ciccarello 2013 AMS 4.0

TRACK SIZE	☐ OPEN	☐ MEDIUM	☐ TIGHT	TEMP. F° / °C
TRACK TRACTION	☐ HIGH	☒ MEDIUM	☐ LOW	AIR TRACK
TRACK SURFACE	☒ SMOOTH	☐ MEDIUM	☐ BUMPY	LAPS
TRACK TYPE	☒ HARD PACKED	☐ SOFT DIRT	☐ CLAY	BEST LAPTIME 26.9
	☒ BLUE GROOVE	☐ ASTRO TURF	☐ GRASS	QUALI RESULT
TRACK CONDITION	☒ DRY	☐ DUSTY	☐ WET	RACE RESULT 9th

DIFFERENTIAL OIL

FRONT	CENTER	REAR
10000 CST	12000 CST	6000 CST

TRANSMISSION SET UP

PIWION	17	T	SPUR GEAR	T
FINAL DRIVE RATIO			ROLLOUT	mm
MOTOR	tekin		TIMING	
ROTOR			ARMATURE	
ESC	tekin		BATTERIES	
BRUSHLESS	PROGRAM	PUNCH	INITIAL BRAKE	AUTO BRAKE

BODY - WING

BODY	serpent
WING	serpent

SHOCKS

FRONT	SPRING	REAR
☐	Orange	☐
☐	Red	☒
☒	Pink	☐
☐	Blue	☐
☐	Purple	☐
☐	Green	☐
☐	Other	☐
500	OIL/CST	325
5mm	REBOUND %	5mm

☐ OPEN **PISTON** ☒ CLOSED


HOLES SIZE	
☐ 1.1MM	☐
☐ 1.2MM	☐
☐ 1.3MM	☒
☒ 1.4 MM	☒
stock bladders	OTHER
	stock bladders

TYRES

BRAND	AKA
TYPE	Impact
INSERT	red
WHEELS	AKA
STOCK ☐ BRAND	TYPE


COMMENTS

Stock pistons, rear 3 1.3 - 3 1.4, front 1.4

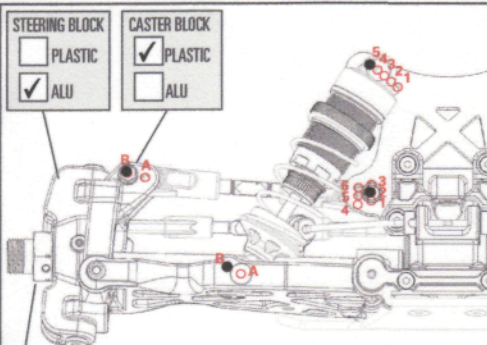


STEERING BLOCK	☐ PLASTIC	☒ PLASTIC
	☒ ALU	☐ ALU

HEX ADAPTER ☒ 0mm mm

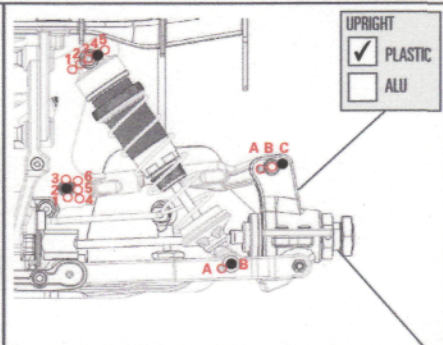

UPRIGHT	☒ PLASTIC
	☐ ALU

HEX ADAPTER -2mm

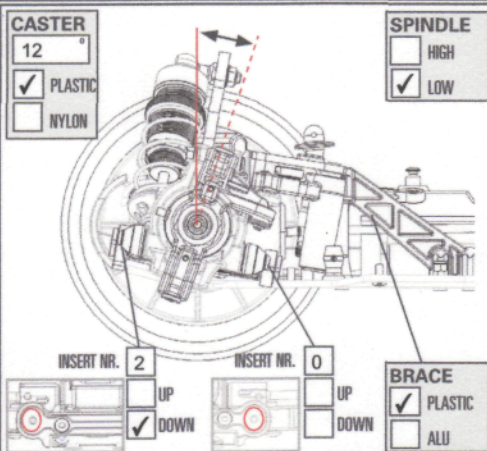


CASTER	12
	☒ PLASTIC
	☐ NYLON

SPINDLE	☐ HIGH
	☒ LOW

INSERT NR. 2	UP	☒ DOWN
INSERT NR. 0	UP	☐ DOWN

BRACE	☒ PLASTIC
	☐ ALU

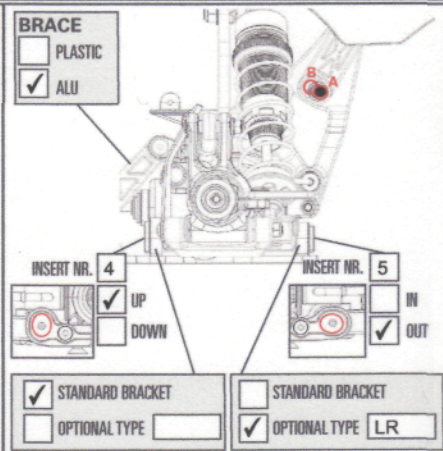


BRACE	☐ PLASTIC
	☒ ALU

INSERT NR. 4	UP	☒ DOWN
--------------	----	--

INSERT NR. 5	IN	☒ OUT
--------------	----	---


☒ STANDARD BRACKET	☐ STANDARD BRACKET
☐ OPTIONAL TYPE	☒ OPTIONAL TYPE LR

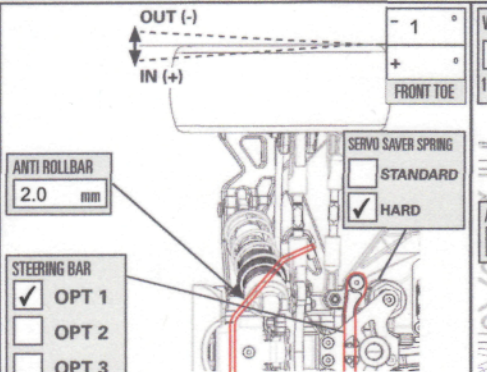

ANTI ROLLBAR	2.0 mm
--------------	--------


STEERING BAR	☒ OPT 1
	☐ OPT 2
	☐ OPT 3

SERVO SAVER SPRING	☐ STANDARD
	☒ HARD

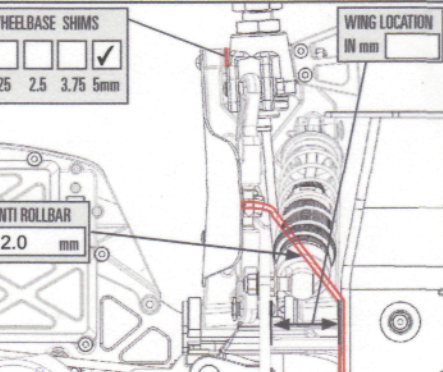

WHEELBASE SHIMS	☐ 1.25	☐ 2.5	☐ 3.75	☒ 5mm
-----------------	-------------------------------	------------------------------	-------------------------------	---

ANTI ROLLBAR	2.0 mm
--------------	--------

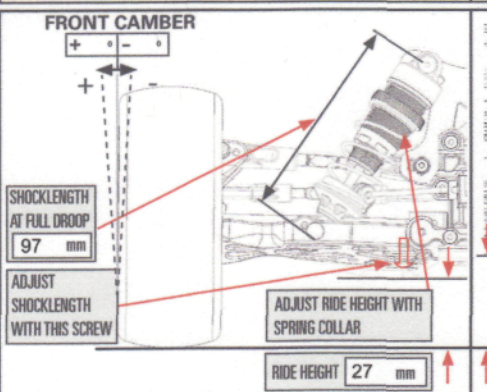


SHOCKLENGTH AT FULL DROOP	97 mm
---------------------------	-------

ADJUST SHOCKLENGTH WITH THIS SCREW

ADJUST RIDE HEIGHT WITH SPRING COLLAR

RIDE HEIGHT	27 mm
-------------	-------

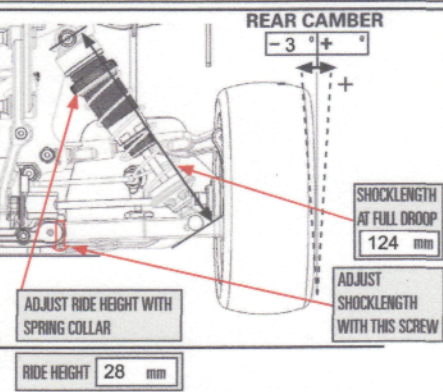

SHOCKLENGTH AT FULL DROOP	124 mm
---------------------------	--------

ADJUST SHOCKLENGTH WITH THIS SCREW

ADJUST RIDE HEIGHT WITH SPRING COLLAR

RIDE HEIGHT	28 mm
-------------	-------