




A
4

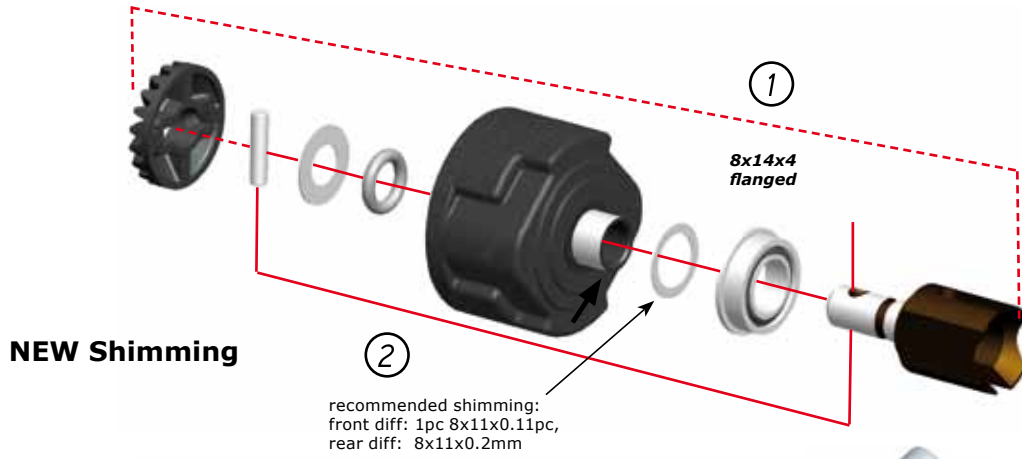


A
5

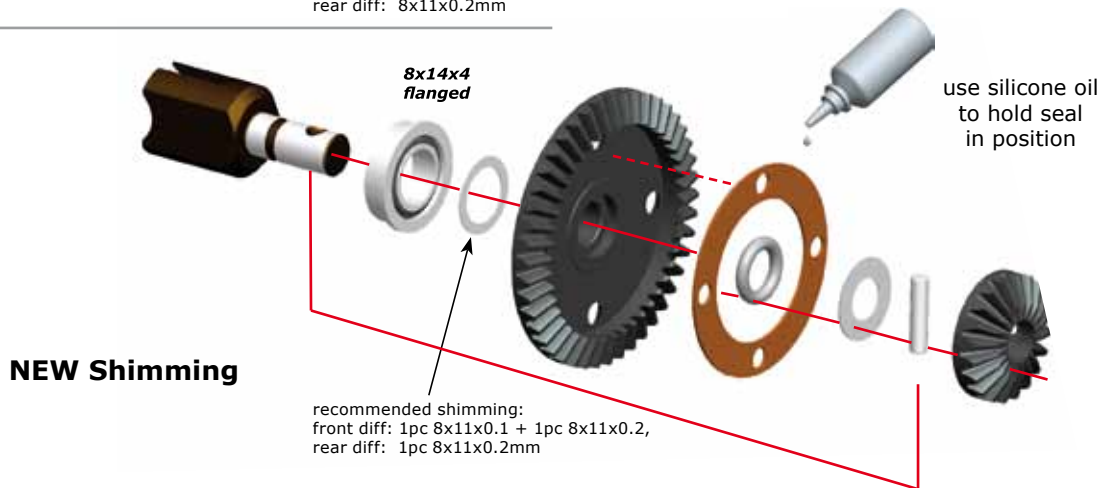

A
9

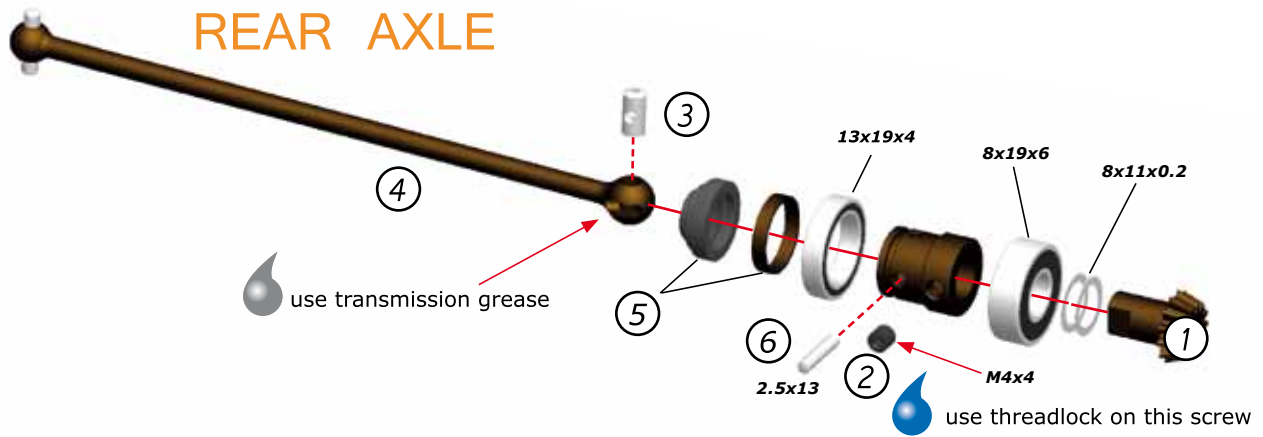

A
19

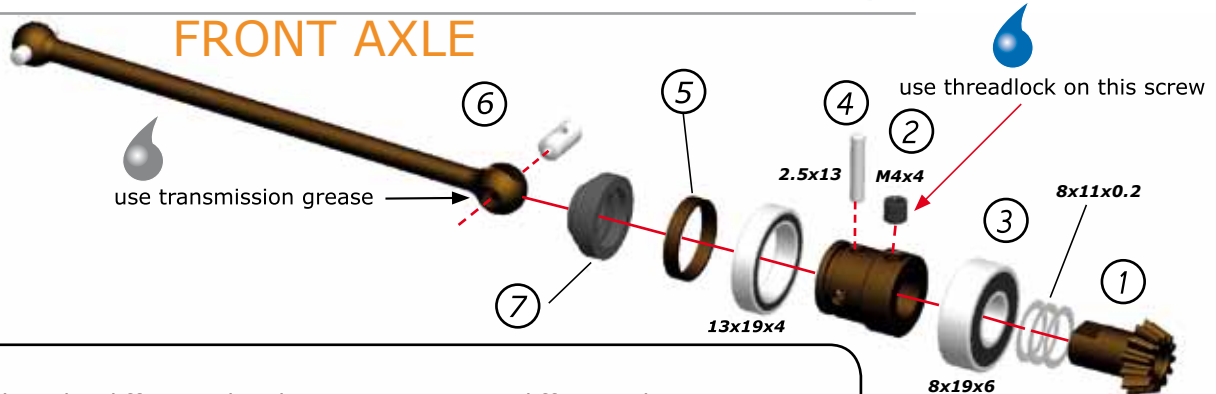

TIP
After building the differential with new gears a new differential case and bearings, the differential may feel a little tight. The connected parts need at least an hour run-time to create a perfect match.
Attention: When you assemble the diff with too much initial play, the gears will not run-in properly and may wear quickly.
After 1 or 2 hours of running the car, re-check the gear-mesh between the ring gear and the pinion. All parts should have run-in properly now.
You may add one or more extra shims on the pinion or ring-gear, start of by placing 1 x 0.1mm more, and try again.