

S35-3

1/8 Off Road Nitro Power Pro Buggy

Name: _____
Date: _____
Track: _____

Diff. Oil
Front: # _____
Center: # _____
Rear: # _____

Tire
Front Type: _____ Rear Type: _____
Foam: _____ Foam: _____

Track Conditions

Size: ☐ Open ☐ Med. ☐ Tight
Traction: ☐ High ☐ Med. ☐ Low
Surface: ☐ Smooth ☐ Med. ☐ Bumpy


Engine

Type: _____
Gasket: _____ mm Muffler: _____
Plug: _____ Fuel: _____

Clutch

Clutch shoes: _____
Spring: _____ mm
Clutch bell / Spur gear: _____


Front Suspension

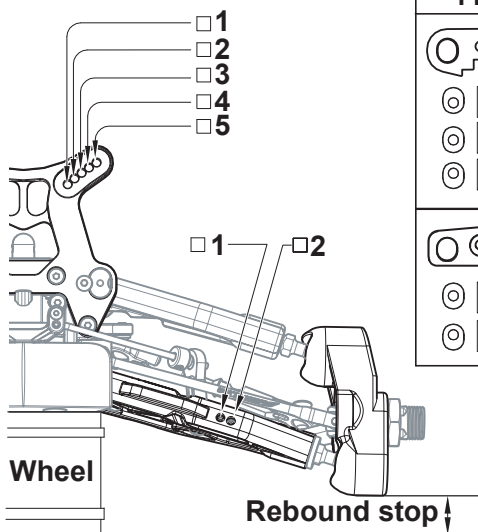


Front Toe-In

☐ -1
☐ 0
☐ +1

☐ 0
☐ +1



Track width _____ mm
Camber angle Upper _____ mm
Lower _____ mm
Toe angle _____
Rebound stop _____ mm
Sway bar _____ mm




Front Shocks

Oil: _____
Pistons: _____
Spring: _____
Spacer: _____ mm

Camber Angle


Steering Ackerman



Notes

Body: _____
Wing: _____

Rear Suspension

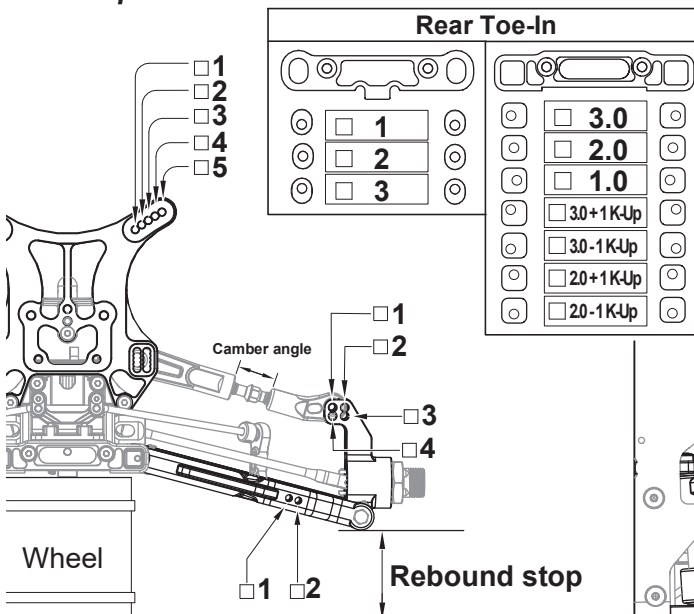

Rear Toe-In

☐ 1
☐ 2
☐ 3



☐ 3.0
☐ 2.0
☐ 1.0
☐ 30+1KUp
☐ 30-1KUp
☐ 20+1KUp
☐ 20-1KUp

Upper arm position



Camber angle _____ mm
Rebound stop _____ mm



Wing Position



Wheelbase F _____ mm R _____ mm
Sway bar _____ mm

Rear Shocks

Oil: _____
Pistons: _____
Spring: _____
Spacer: _____ mm



Notes