

TEAM AZARASHI REDSEAL

SET UP SHEET Ver.1.1

Driver:

Date:

Track:


YATABE ARENA

Events:

Condition:

FRONT SUSPENSIONS

Shock Position



Shock stay


- ☒ LA216B
☐ LA216HB

Spacer

1 mm

Shock stay high

0 mm




Spacer

0 mm

BumpSteerSpacer

0 mm



Caster Block

- ☒ 7°
☐ 10°

Axle-Height Spacer

- ☒ UP ☐ Down

Diameter of A.R.B : mm


Bellcrank Spacer: 1 mm

Camber angle : -1.0

Toe angle : 0


Ride Height : 22 mm

Sus. Holder Spacer

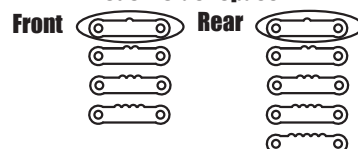

REAR SUSPENSIONS

Shock Position



Shock stay

- ☒ LA217
☐ LA217H


Wing Height

Spacer

1 mm


Shock stay high

0 mm



Spacer

2 mm



Wheel Spacer

0 mm

Rear Sus.Arm

- ☐ LA272(UM566.UM521)
☐ UM521
☐ LA255
☒ UM713(RB6)

Sus. Holder RF

- ☐ Standard
☒ LAW36

☒ IN ☐ OUT

Sus. Holder RR

- ☐ Standard
☒ LAW37

☐ IN ☒ OUT

B

E


Diameter of A.R.B : 1.2 mm

Camber angle : -1.0

Rear Hub add Toe :

Ride Height : 22 mm

Sus. Holder Spacer

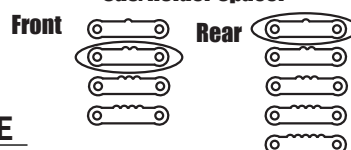

FRONT SHOCKS

Spring: Kyosho Gold Piston: 5hole

Shock oil: Losi 35 Limiter: 0

REAR SHOCKS

Spring: Kyosho Gold Piston: 5hole

Shock oil: Losi 35 Limiter: 0

DIFFERENTIALS

Front Diff setting:

Rear Diff setting:

AERO DEVICE

Body: REDSEAL Rear Wing: AZ-0034 N.Splend

Wing Angle : 0 Front Wing:

FRONT TIRES

Tire / Compound: Panther T725C

Insert: P/L Closed Wheel: W5201W

REAR TIRES

Tire / Compound: Panther T755C

Insert: P/L Closed Wheel: W5028W

ELECTRONICS

Motor: SP V3.0 7.5T ESC: Tresray

Pinion / Spur : T / T Servo:

Radio:

Receiver:

ESC Setting:

TRACK INFO

Traction: Hight / ~~Medium~~ / Low ~~Somooth~~ / Bumpy SoftDirt / Grass / ~~Clay~~ / Astroturf ~~Dry~~ / Wet Dusty / ~~Clean~~