


Name _____

Date _____

Track / City _____

Event _____

Front Suspension



Upper Spacer _____ mm


- Shock Stay
- Std (UM511)
 - Carbon (UMW500)
 - Big Bores (UMW525)

Toe In Out _____°

Front Bulkhead Weight Placement


- None _____ oz _____ g
 - Bulkhead _____ oz _____ g
 - Chassis _____ oz _____ g
- * 1oz=28g

Camber + - _____°



- Caster
- 25°
 - 30°
- Spacer
- 0.5
 - 1.0
 - None

Comments: _____




Ackerman Steering Spacer _____ mm

Axle Type


- Standard (Steel: UM506)
- Option (Aluminum: UMW507)

Bump Steer Spacer _____ mm



- Wheelbase
- Long
 - Middle
 - Short

Rear Suspension

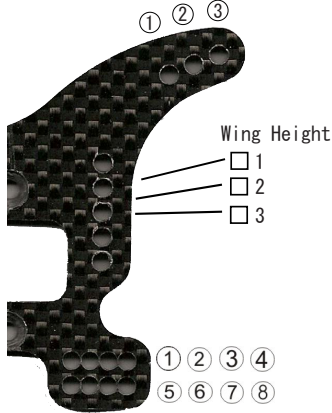

Wing Height

- 1
- 2
- 3

Lower Sus Holder

- | | |
|--|--|
| Normal | Aluminum (Opt) |
| Narrow <input type="checkbox"/> RF: RB5 | <input type="checkbox"/> UMW511+UMW512 |
| Wide <input type="checkbox"/> RF2: RB5SP | <input type="checkbox"/> UMW514+UMW515 |

- Sus Holder Spacer
- 0.5
 - 1.0
 - None
- F R
- 0.5
 - 1.0
 - None

Anti-Squat _____°


Swing Shaft

- 62.5mm: RB5 (UM510, UM510-01)
- 65.5mm: RB5SP (UM522, LA232-01)

Lower Arm

- UM503 (kit)
- LA243 (Mid)
- UM521 (RB5SP)
- UM521-1 (RB5SP)

Upper Spacer _____ mm



- Wheelbase
- Long
 - Middle
 - Short

Rear Hub add Toe

- 0° (Standard)
- 0.5° (LA244-05)


Sway Bar None

_____ mm

Camber + - _____°

Axle Spacer

- Out _____ mm
- In _____ mm



Wheel Shaft Type

- RB5SP (UM522-02)
- RB5 (UM510-02)
- Proline Axle (UM502)
- UM523 (Brushless Motor Offset Spacer)

Wheel Spacer _____ mm

Comments: _____

Shock

Front

Rear

Shock Piston _____

Shock Oil # _____ # _____

Shock Spring _____

Limiters in out mm in out mm

Shock Length (A) _____ mm _____ mm

Shaft Length (B) _____ mm _____ mm


- Shock Top Type
- Std: RB5
 - Low: ZX5FS

Rear Shock Body

- Short: RB5SP (W5196-01V) 38mm
- STD: RB5 (W5187-01V) 42mm

Rear Shock Shaft

- STD: RB5SP (W5193-01) 50mm
- Opt: ZX5 (W5183-02) 54mm




Body / Wing / Chassis

Wing

- Aquarius (LA239)
- Sagittarius (LA240)
- Aries (LA241)
- Blast-L (LA251)
- Step-L (LA247)
- Step-S (LA247)
- Blast-S (LA247)
- Other: _____

Weight Placement

- On Top of Servo _____
- Under Servo _____
- Under Speed Controller _____
- Under Lipo _____



Wing Angle

- 4°
- 7°
- 10°

Ride Height A B F _____ mm R _____ mm



Tyre

Front

Rear

- | | | |
|--------------|-------|-------|
| Tyre | _____ | _____ |
| Inserts | _____ | _____ |
| Wheel | _____ | _____ |
| Tyre Compund | _____ | _____ |

Others

Gear Ratio 2.6:1

- Motor _____
- Pinion / Spur _____ / _____
- Battery _____
- ESC _____

Track Condition

- Smooth
- Bumpy
- Low Traction
- Med Traction
- High Traction
- Wet
- Dry
- Sandy
- Soft Dirt
- Grass
- Blue Groove
- Clay
- Dusty
- Other

Spring / Rate

#55	Orange
#60	Orange Yellow
#65	Yellow
#68	Blue
#70	Silver
#72	Cobalt blue
#75	Light Green
#80	Green

Comment: _____