

YZ2F2 SETTING SHEET

Arn0
C. Sturdy
v8

CIRCUIT

INDOOR OUTDOOR
 WET DRY DUSTY SMOOTH BUMPY OTHER
 LOW TRACTION MED TRACTION HIGH TRACTION
 CLAY GRASS BLUE GROOVE ASTROTURF DIRT
 CARPET WOOD

DRIVER _____

DATE _____

FRONT

Z2-017 Z2-017G
 _____ mm

OS ON
 Z2-300FU
 OS ON
 Z2-300FLO Z2-300FL5
 B2-300FL(Steel)

Hex _____ mm
 Spacer _____ mm
 Z2-413 Z2-413A
 Z2-008F Z2-413G
 Z2-008FG Z2-415S
 Z2-008GF Z2-415GS
 _____ mm
 _____ mm
 0° 02.5° 05°

CAMBER ↔ _____ °
 TOE IN OUT _____ °

SPRING

YELLOW (YS-A875)

_____ mm

OIL

#1 #2 #3

_____ mm X _____ mm

Z2-S2S (Kit)
 Z2-S2SD
 B2-S812A

REAR

Z2-300SRF Z2-300SRR
 _____ mm

RF RR
 _____ mm
 _____ mm
 _____ mm

CAMBER ↔ _____ °
 Hex _____ mm
 Spacer _____ mm
 Z2-300RUW
 _____ mm

Option
 0° 0.5° 1°
 03° 03.5° 04°
 00° 01° 02°

S M L

SPRING

GREEN (YS-A1200)

_____ mm

OIL

#1 #2 #3

_____ mm X _____ mm

Z2-S2L (Kit)
 Z2-S2LD
 B2-S812A

DRIVE

Kit
 Z2-670V
 Z2-670VP

Bonded
 Sintered


Motor # _____ mm

Gear: Spur T / Pinion T: 2.6

Battery: _____

ESC: Racing Performer X Series

Battery placement

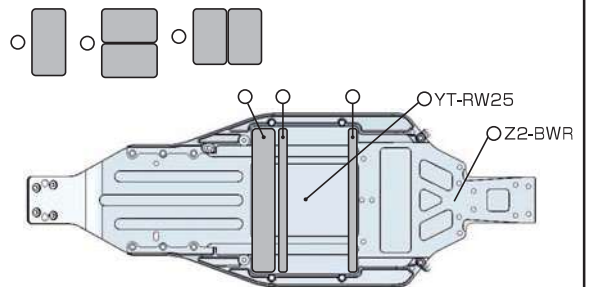

TIRE

FRONT
 TIRE _____
 INSERTS _____
 WHEELS _____

REAR
 TIRE _____
 INSERTS _____
 WHEELS _____

OTHER

COMMENT _____