



GENERAL SETUP SHEET

☐ 1/18 ASPHALT LATE MODEL

☐ 1/18 DIRT LATE MODEL

☐ 1/18 ASPHALT TRUCK

☐ 1/18 DIRT STREET STOCK

Driver : _____ Date: _____

Track Name: _____ City/State: _____

Surface: _____ ☐ Indoor ☐ Outdoor (check one)

Race: _____ Start: _____ Finish: _____

LEFT FRONT

Tire Compound: ☐ Std ☐ Soft

Shock O-Ring: ☐ Yes ☐ No

Shock Type: ☐ Plastic ☐ Aluminum

Oil/Grease: _____

Spring: ☐ Soft ☐ Med ☐ Hard

Spring Preload: _____

Caster: _____

Corner Weight: _____

Chassis Height: _____

FRONT

Toe: _____

Caster: _____

Total Car Weight: _____

RIGHT FRONT

Tire Compound: ☐ Std ☐ Soft

Shock O-Ring: ☐ Yes ☐ No

Shock Type: ☐ Plastic ☐ Aluminum

Oil/Grease: _____


Spring: ☐ Soft ☐ Med ☐ Hard

Spring Preload: _____

Caster: _____

Corner Weight: _____

Chassis Height: _____

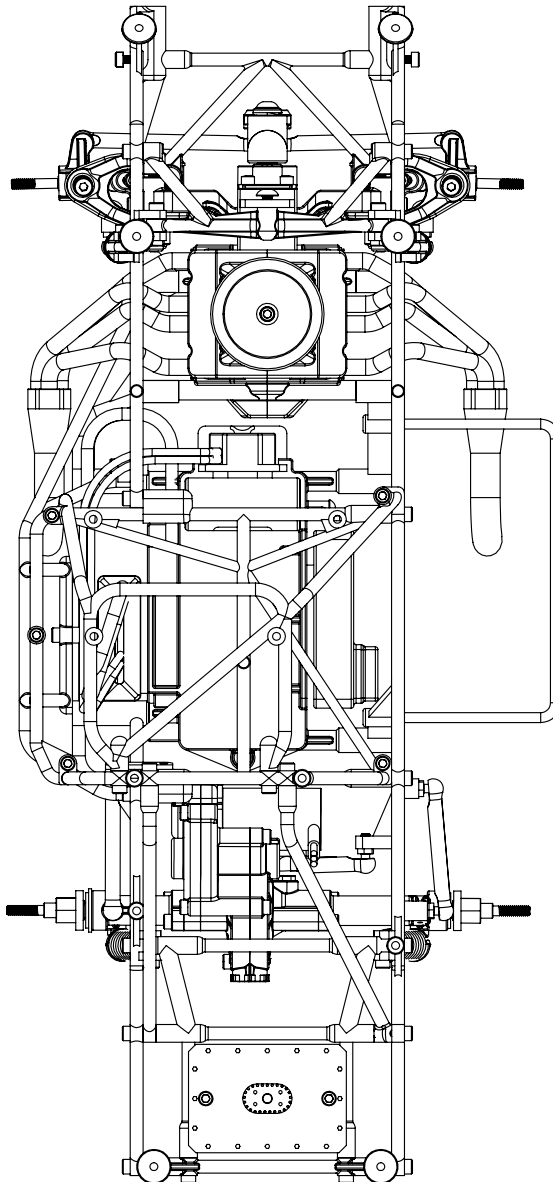

ELECTRONICS

Servo: _____

ESC: _____

Tx: _____

Rx: _____

Battery: ☐ 4-Cell ☐ 5-Cell ☐ Other

Motor: ☐ 8700kv ☐ 10,000kv

MISC.

Servo Arm Hole:

☐ Upper



☐ Lower



Dual Rate Amount: _____

Motor Heatsink: ☐ Yes ☐ No

Other: _____

LEFT REAR

Tire Compound: ☐ Std ☐ Soft

Shock O-Ring: ☐ Yes ☐ No

Shock Type: ☐ Plastic ☐ Aluminum

Oil/Grease: _____

Spring: ☐ Soft ☐ Med ☐ Hard

Spring Preload: _____

Caster: _____

Corner Weight: _____

Chassis Height: _____

REAR

Other: _____

RIGHT REAR

Tire Compound: ☐ Std ☐ Soft

Shock O-Ring: ☐ Yes ☐ No

Shock Type: ☐ Plastic ☐ Aluminum

Oil/Grease: _____

Spring: ☐ Soft ☐ Med ☐ Hard

Spring Preload: _____

Caster: _____

Corner Weight: _____

Chassis Height: _____

NOTES: