

22 TEAM ASSOCIATED

SETUP SHEET

For the RC10L2, RC10L20 Kits

www.CompetitionX.com

Driver: _____


Track: _____

Date/Event: _____

FRONT SUSPENSION

Notes _____

Upper Arm Mount:



Caster Shim Position:

☐ Rear ☐ Centered ☐ Front ☐ Other _____



Front Ride Height Spacers: _____

Steering Block: ☐ Standard ☐ Inline

Camber - Left: _____° Right: _____°

Toe-In: _____° Toe-Out: _____°

FRONT SPRINGS

Springs: ☐ .018 ☐ .020 ☐ .022 ☐ .024 ☐ Other: _____

Kingpin: ☐ Standard ☐ Other: _____


Label Drawing for Shim Position, Quantity and Thickness

shim qty, thickness: _____

shim qty, thickness: _____

shim qty, thickness: _____


Notes: _____



REAR SUSPENSION

Axle Height Adjuster:

☐ 4-up ☐ 1-up ☐ 2-up ☐ #3 ☐ 2-down ☐ 1-down ☐ 4-down



T-Bar Thickness: ☐ .075" ☐ Other: _____

Damper Lube: ☐ Yes ☐ No Type: _____

Damper Tube Springs: ☐ Standard ☐ Other: _____

SHOCK

Body: ☐ Standard ☐ Other: _____

Oil: _____ wt.

Spring: _____

Limiters - Inside: _____

Outside: _____

Notes: _____



Piston: _____




OTHER

Wheels & Tires	Front	Rear
Tire Type		
Tire Diameter		
Stagger		
Car Width		
Wheels		

Rear Axle: ☐ Standard ☐ Other: _____

Tire Treatment Type: _____

Shade in Amount of Tire Treatment (in 1/4 increments):

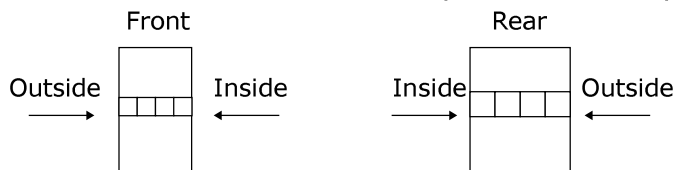


Chassis: ☐ Standard ☐ Other: _____

Car Body: _____ Wing/Spoiler: _____

Motor: _____ Gearing: _____ t/ _____ t/

Battery: _____

Indicate Battery Placement:

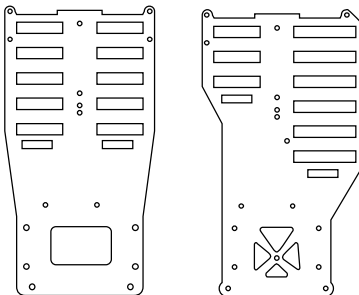

Notes: _____

GENERAL

Track Description: _____

Race Comments: _____

Car Comments: _____