AWESOMATIX A12X

SETUP SHEET 210426

This form has been optimized for use with Adobe Acrobat.
Use of alternative PDF readers may result in formatting, display, or data entry issues.

NAME Kemp Anderson
RACE New York Grand Prix
TRACK 360v2 Raceway, New Rochelle, NY
COUNTRY USA CLASS Modified

DATE October 15-18, 2026 TEMPERATURE AIR / TRACK 72 °C / 72 °C
SURFACE ASPHALT ☐ OUTDOOR ☐ INDOOR ☑ CARPET ☑
TRACK CONDITIONS BUMPY ☐ FLAT ☑ TECHNICAL ☐ MIXED ☑ FAST ☐
TRACTION LOW ☐ MEDIUM ☑ HIGH ☐

STEERING HUB POST
ST1208-C4S ☐ ST1208-C5AL ☐
ST1208-C5S ☐ ST1208-C5AL ☐
ST1208-C6S ☐ ST1208-C6AL ☐
CAMBER 1.0 °

SUSPENSION PLATE
C1205-X ☐ C1205AFS ☑
C1205-ZT ☐ C1205AFS-1.5 ☐
C1205-X-1.5 ☐ C1205AFS-5.0 ☐
C1205-6.0 ☐ OTHER


SERVO PLATE
C1201-X ☐ C1201AFS ☑
C1201-ZT ☐ C1201AFS-1.5 ☐
C1201 ☐ C1201AFS-5.0 ☐
OTHER

STEERING BLOCKS
AT1204-X ☑ OTHER
AT1204-ZTX ☐
BUMPSTEER SHIMS 3 mm

FRONT BUMPER
P1215 ☐
OTHER MXLR
SPACER 3 mm

REAR SPRING
SPR12XR-C0.8 ☐ SPR12X-C0.8L ☐
SPR12XR-C1.0 ☐ SPR12X-C1.0L ☑
SPR12XR-C1.2 ☐ OTHER

JOINT SET
LRC ☑ HRC ☐
ELRC ☐ EHRC ☐
JOINT SPACERS
FRONT 0 mm
REAR .5 mm

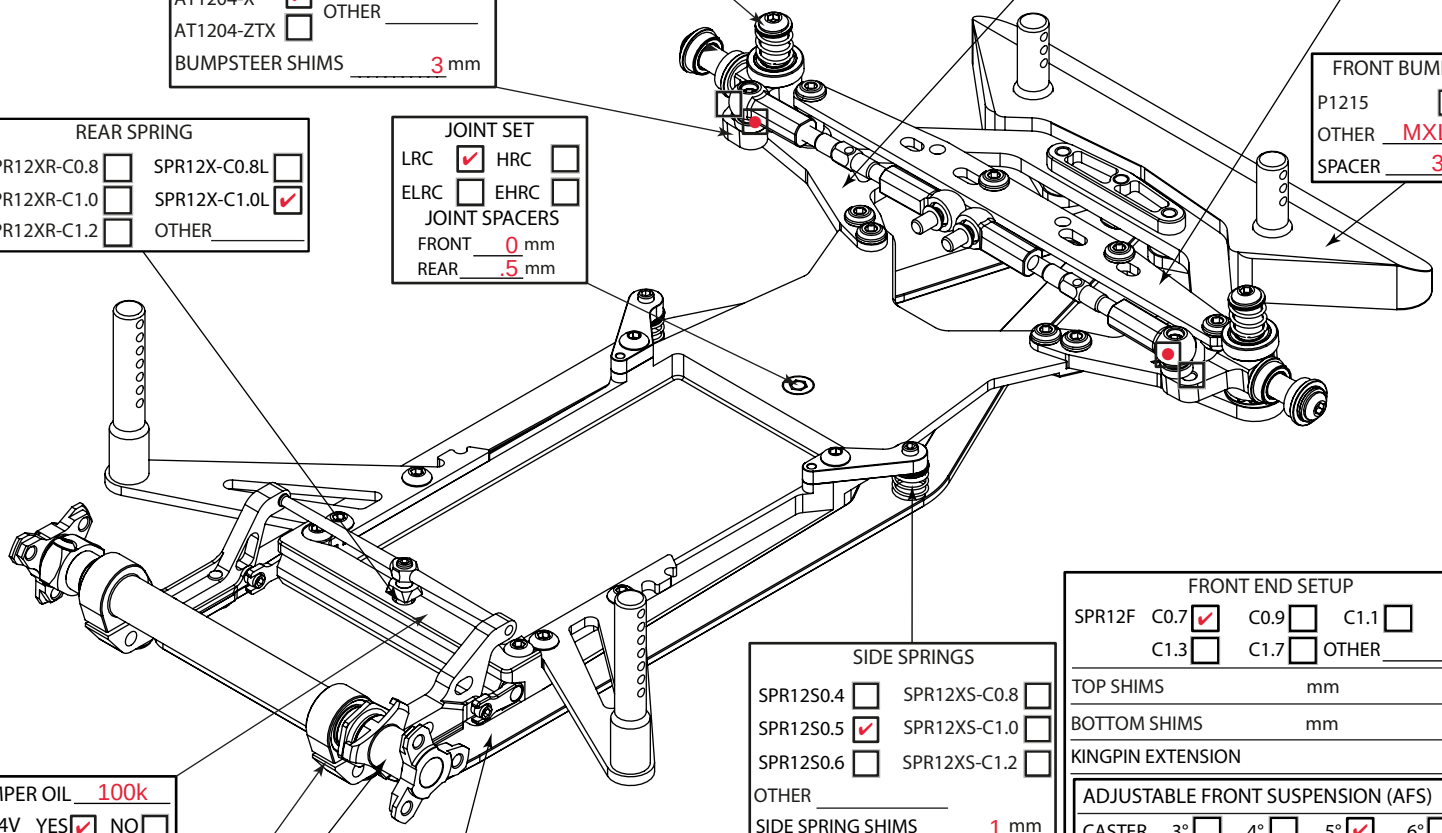

SIDE SPRINGS
SPR12S0.4 ☐ SPR12XS-C0.8 ☐
SPR12S0.5 ☑ SPR12XS-C1.0 ☐
SPR12S0.6 ☐ SPR12XS-C1.2 ☐
OTHER
SIDE SPRING SHIMS 1 mm
SIDE SPRING GAP 0 mm

FRONT END SETUP
SPR12F C0.7 ☑ C0.9 ☐ C1.1 ☐ C1.3 ☐ C1.7 ☐ OTHER

TOP SHIMS	mm	pcs
BOTTOM SHIMS	mm	pcs
KINGPIN EXTENSION	mm	

ADJUSTABLE FRONT SUSPENSION (AFS) ☑
CASTER 3° ☐ 4° ☐ 5° ☑ 6° ☐
CAMBER 1.0 ° DROOP .8 mm
SPRING PRELOAD 22.8 mm

O-RINGS 0pcs ☑ 1pcs ☐ 2pcs ☐
O-RING TYPE
GREASE MXLR 10k

DAMPER OIL 100k
OR14V YES ☑ NO ☐

RIDE HEIGHT SPACERS .25 mm

REAR AXLE
SSS SPOOL ☑ BALL DIFF ☐
CS-1 SPOOL ☐ GEAR DIFF ☐
CARBON ☐ BRAND
STEEL ☐ OIL

OUTER FRAME
AM1204X-ST ☐
AM1204X-STS ☑
AM1204WC ☐
AM1204XT ☐

FRONT RIDE HEIGHT (FRH)	3.3 mm	FRONT DROOP (FD)	.8 mm
REAR RIDE HEIGH (RRH)	3.6 mm	REAR DOWNSTOP (RD)	mm
GAP UNDER DAMPER (GUD)	4.0 mm	TRACK WIDTH	
DOWNSTOP NUT GAP (DNG)	1.2 mm	FRONT	168.5 mm
SPRING ROD HEIGHT (SRH)	0.7 mm	REAR	172 mm

BATTERY	Team EAM 9200 1s
BATTERY PLUGS	FRONT ☑ BACK ☐
SERVO POSITION	LEFT ☐ RIGHT ☑
ESC POSITION	LEFT ☑ RIGHT ☐

SERVO	Sanwa PGS-HX
SERVO SAVER	Xray hard
SHIMS ON SERVO SAVER	2.5 mm
TOE OUT	1 °
STEER. TRAVEL	IN 24 ° OUT °

TIRES	FRONT	REAR
BRAND	Jaco	Jaco
TYPE	Mint	Mint
DIAMETER	39.5 mm	40.5 mm
GLUED SIDEWALLS	FRONT ☑	REAR ☐

ADDITIVE Sxt 3.0 regular
FRONT 12 mm REAR
TIME 10 min TIME 30 min

MOTOR	Hobbywing G3 3.5t	TOTAL WEIGHT	740
SPUR 1 PINION 1 ROLLOUT 127,23		F/R WEIGHT DISTRIBUTION	47/53
ESC	Hobbywing 1s HD	RECEIVER	Sanwa RX-493i
ESC SETTINGS	Boosted	RADIO	Sanwa M17S
BODY	Montech M20	REAR BODY HEIGHT (SIDE DAMS)	82 mm
BEST LAPTIME	8.3	QUALIF / FINAL POSITION	4 / 3

COMMENTS:
MXLR carbon electronics tray, double sauce rears