AWESOMATIX A12X

SETUP SHEET 210426

This form has been optimized for use with Adobe Acrobat.
Use of alternative PDF readers may result in formatting, display, or data entry issues.

NAME Michael Skeen
RACE MonTech NYGP 2026
TRACK 360v2 Raceway New Rochelle, NY
COUNTRY United States CLASS 13.5T

DATE 18.10.2026 TEMPERATURE AIR / TRACK 73F °C / 73F °C
SURFACE ASPHALT ☐ OUTDOOR ☐ INDOOR ☐ CARPET ☑
TRACK CONDITIONS BUMPY ☐ FLAT ☑ TECHNICAL ☐ MIXED ☐ FAST ☑
TRACTION LOW ☐ MEDIUM ☑ HIGH ☐

STEERING HUB POST
ST1208-C4S ☐ ST1208-C5AL ☐
ST1208-C5S ☐ ST1208-C5AL ☐
ST1208-C6S ☐ ST1208-C6AL ☐
CAMBER _____ °

SUSPENSION PLATE
C1205-X ☐ C1205AFS ☑
C1205-ZT ☐ C1205AFS-1.5 ☐
C1205-X-1.5 ☐ C1205AFS-5.0 ☐
C1205-6.0 ☐ OTHER _____


SERVO PLATE
C1201-X ☐ C1201AFS ☑
C1201-ZT ☐ C1201AFS-1.5 ☐
C1201 ☐ C1201AFS-5.0 ☐
OTHER _____

STEERING BLOCKS
AT1204-X ☑ OTHER _____
AT1204-ZTX ☐
BUMPSTEER SHIMS 2 mm

FRONT BUMPER
P1215 ☐
OTHER MAX-09-017
SPACER 3.5 mm

REAR SPRING
SPR12XR-C0.8 ☐ SPR12X-C0.8L ☑
SPR12XR-C1.0 ☐ SPR12X-C1.0L ☐
SPR12XR-C1.2 ☐ OTHER _____

JOINT SET
LRC ☑ HRC ☐
ELRC ☐ EHRC ☐
JOINT SPACERS
FRONT 1.75 mm
REAR .5 mm

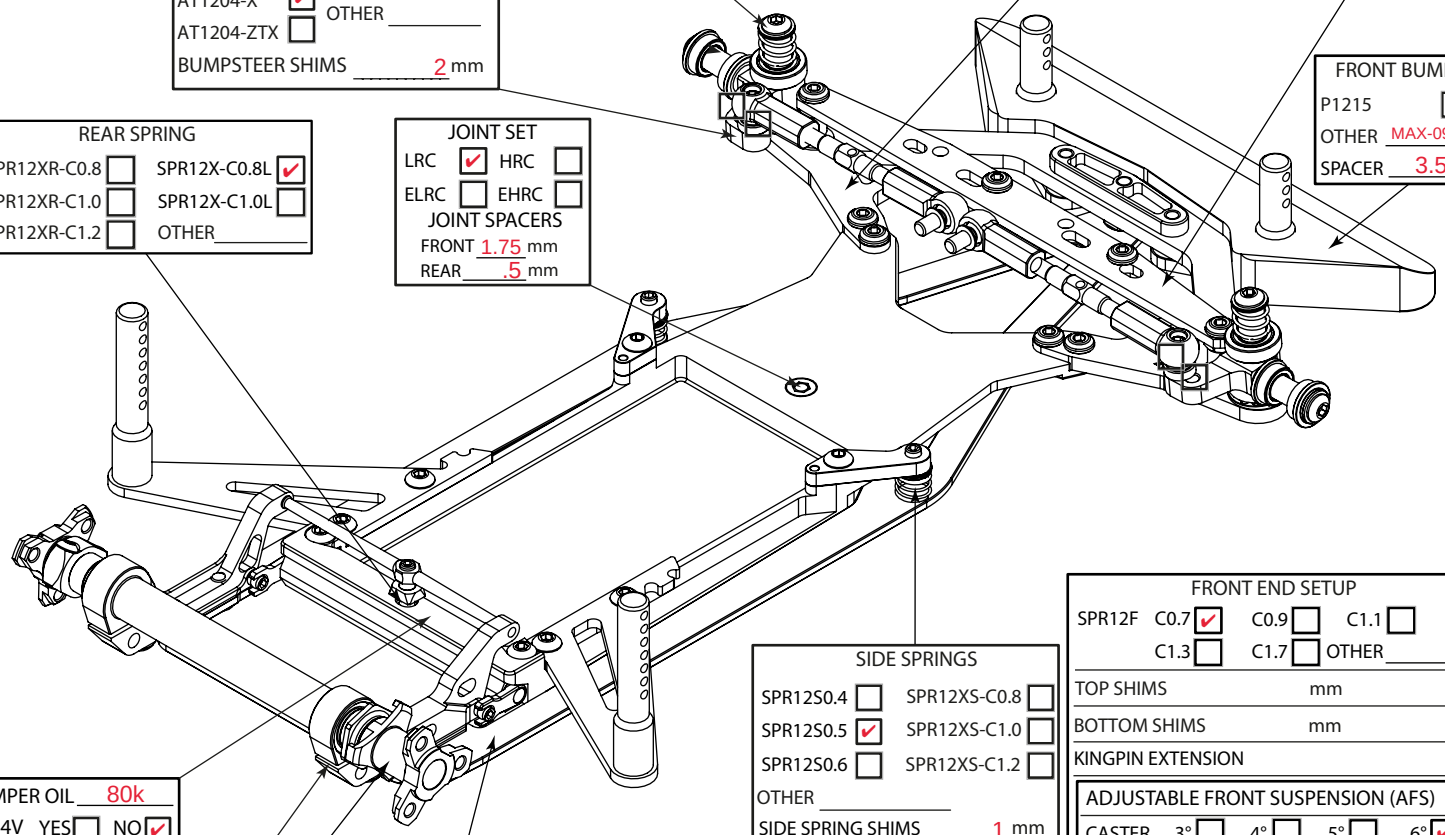

SIDE SPRINGS
SPR12S0.4 ☐ SPR12XS-C0.8 ☐
SPR12S0.5 ☑ SPR12XS-C1.0 ☐
SPR12S0.6 ☐ SPR12XS-C1.2 ☐
OTHER _____
SIDE SPRING SHIMS 1 mm
SIDE SPRING GAP N/A mm

FRONT END SETUP
SPR12F C0.7 ☑ C0.9 ☐ C1.1 ☐ C1.3 ☐ C1.7 ☐ OTHER _____
TOP SHIMS mm pcs
BOTTOM SHIMS mm pcs
KINGPIN EXTENSION mm
ADJUSTABLE FRONT SUSPENSION (AFS) ☑
CASTER 3° ☐ 4° ☐ 5° ☐ 6° ☑
CAMBER 1.75 ° DROOP .5 mm
SPRING PRELOAD mm
O-RINGS 0pcs ☐ 1pcs ☑ 2pcs ☐
O-RING TYPE
GREASE Kyosho 15k

DAMPER OIL 80k
OR14V YES ☐ NO ☑

RIDE HEIGHT SPACERS _____ mm

REAR AXLE
SSS SPOOL ☑ BALL DIFF ☐
CS-1 SPOOL ☐ GEAR DIFF ☐
CARBON ☐ BRAND _____
STEEL ☐ OIL _____

OUTER FRAME
AM1204X-ST ☐
AM1204X-STS ☑
AM1204WC ☐
AM1204XT ☐

FRONT RIDE HEIGHT (FRH)	3.2 mm	FRONT DROOP (FD)	.5 mm
REAR RIDE HEIGH (RRH)	3.4 mm	REAR DOWNSTOP (RD)	1,40 mm
GAP UNDER DAMPER (GUD)	3.5 mm	TRACK WIDTH	
DOWNSTOP NUT GAP (DNG)	1.6 mm	FRONT	168 mm
SPRING ROD HEIGHT (SRH)	.7 mm	REAR	171.8 mm

BATTERY Team EAM 9200
BATTERY PLUGS FRONT ☑ BACK ☐
SERVO POSITION LEFT ☑ RIGHT ☐
ESC POSITION LEFT ☑ RIGHT ☐

SERVO Power HD M8H
SERVO SAVER Hudy Aluminum fixed
SHIMS ON SERVO SAVER 1.5 mm
TOE OUT 1 °
STEER. TRAVEL IN 23 ° OUT °

TIRES	FRONT	REAR
BRAND	Jaco	Jaco
TYPE	Blue	Green
DIAMETER	39.6 mm	40.2 mm
GLUED SIDEWALLS	FRONT ☑	REAR ☐

ADDITIVE SXT 3.0
FRONT 18 mm REAR
TIME 7 min TIME 7 min

MOTOR Hobbywing G5 13.5T TQ
SPUR 70 PINION 46 ROLLOUT 82,99
ESC Hobbywing XR10 Pro 1s HD
ESC SETTINGS Blinky
BODY MonTech M20
BEST LAPTIME 9.34

TOTAL WEIGHT 735
F/R WEIGHT DISTRIBUTION
RECEIVER Sanwa 493
RADIO Sanwa M17
REAR BODY HEIGHT (SIDE DAMS) 76.5 mm
QUALIF / FINAL POSITION 6 / 4

COMMENTS:

WTF 30mm fan
Fabtek fan mount
Sortafast black screws and turnbuckles