

NAME **Evo II base carpet setup #1**

COUNTRY

RACE

TRACK

DATE

TEMP.°C AIR / TRACK

/

CARPET ☒

ASPHALT ☐

TRACK CONDITION TECHNICAL ☐

MIXED ☒

FAST ☒


TRACTION

LOW ☐

MEDIUM ☒

HIGH ☒

FRONT

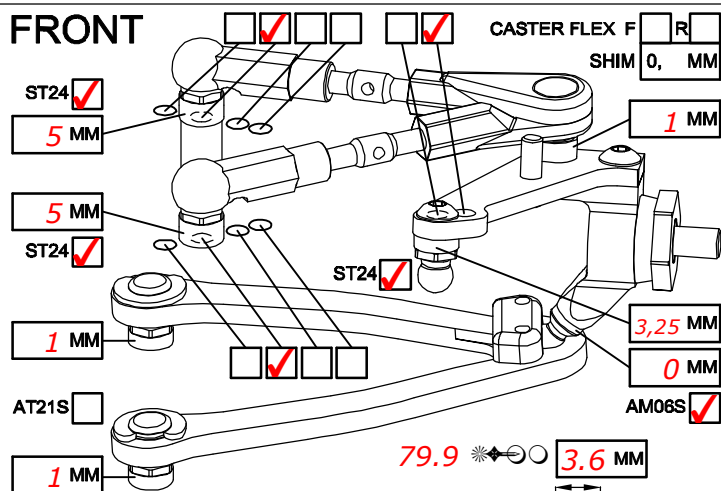

CAMBER ANGLE / ° **1,5**

CASTER ANGLE / ° **4**

TOE ANGLE / ° **1 out each side**

RIDE HEIGHT / MM **5,2**

DOWNSTOP / MM **6,5**

UPSTOP / MM **16 mm**

STABILIZER Ø / MM **1,2**

LOW ARM STD ☒


STEERING ARM STD ☒

WHEEL SPACER / MM **0**

FRONT DRIVE BALL DIFF ☐ GEAR DIFF ☐ SPOOL ☒ ONE-WAY ☐

DIFF SET LOOSE ☐ MEDIUM ☐ TIGHT ☐ OIL #

DOGBONE DRIVE BUSHING ☒ C-DRIVE ☐ BB ☐ EVD ☒

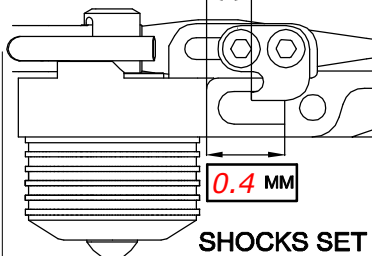

SHOCKS SET


SPRING STD ☒ S ☐

DAMPER #6 ☐ D2 500 oil #3 ☐

ACTION SYM. ☐ ASYM. ☐

SRS/RHS ARR. I ☒ II ☐

REAR

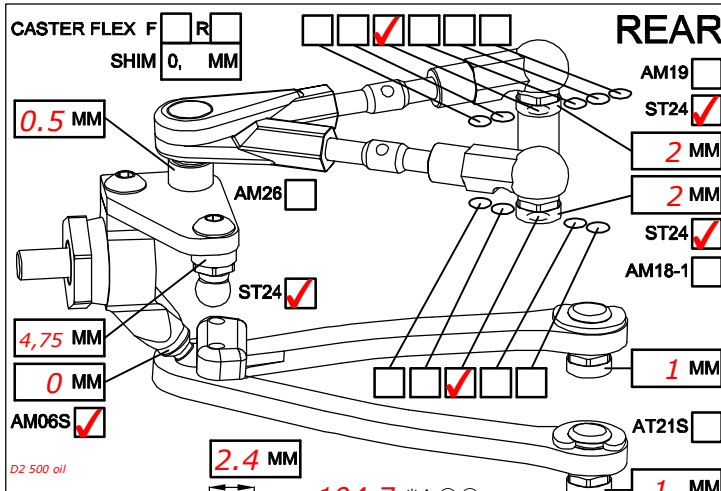

CAMBER ANGLE / ° **2**

CASTER ANGLE / ° **4 (short base)**

TOE ANGLE / ° **2,75**

RIDE HEIGHT / MM **5,4**

DOWNSTOP / MM **5**


UPSTOP / MM **16 mm**

STABILIZER Ø / MM **1,1**

LOW ARM STD ☒

STEERING ARM STD ☒

WHEEL SPACER / MM **0**

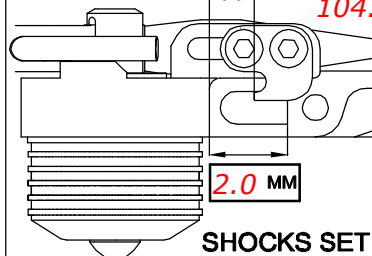

SHOCKS SET

SPRING STD ☒ S ☐

DAMPER #6 ☐ D2 500 oil #3 ☐

ACTION SYM. ☐ ASYM. ☐


SRS/RHS ARR. I ☒ II ☐

REAR DRIVE BALL DIFF ☐ GEAR DIFF ☒

DIFF SET LOOSE ☐ MEDIUM ☐ TIGHT ☐ OIL # **5000**

DOGBONE DRIVE BUSHING ☒ C-DRIVE ☐ BB ☐ EVD ☐


FRAME FLEX SETTING

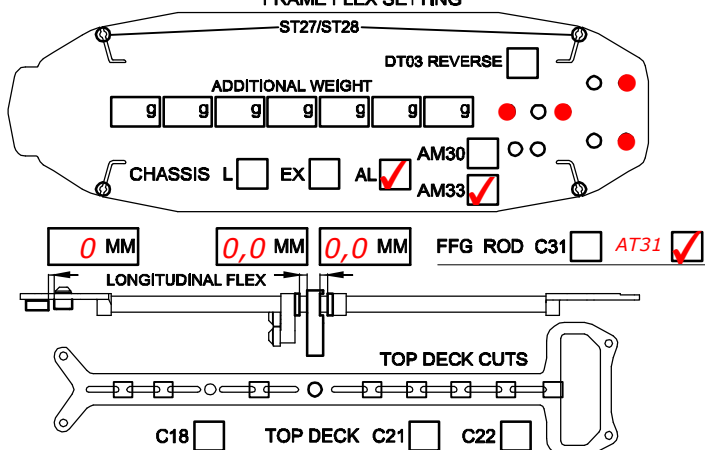

TIRES	FRONT	REAR
BRAND		
INSERTS		
WHEELS		
ADDITIVE		

MOTOR LAYOUT	LONG. ☒	TRANS. ☐	MOTOR
SERVO LAYOUT	LEFT ☒	RIGHT ☐	SERVO Awesomatix
ESC LAYOUT	LEFT ☒	RIGHT ☐	ESC
BAT. LAYOUT	R1 ☐ R2 ☐ F1 ☒ F2 ☐		BATTERY
SPUR	PINION	SD1 ☐	RECEIVER
FINAL DRIVE RATIO			MOTOR OFFSET / MM
BODY			WING

STEERING POST

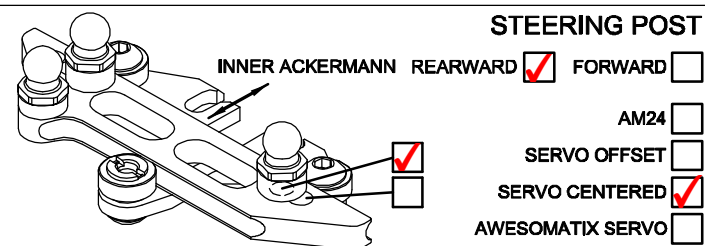

BEST LAPTIME QUALIF. / FINAL POSITION /

ESC SETTING

COMMENTS / IMPRESSIONS

C01-AL-S2 with AM33-5 and all screws , Mode 2 motormount

CONTACT