

NAME **Larry Fairtrace**

COUNTRY **USA**

RACE **17.5 TC**


TRACK **2014 Snowbird Nationals**

DATE **Feb 2 2014**

TEMP.°C AIR / TRACK **20°C / 20°C**

TRACK CONDITION TECHNICAL ☒ MIXED ☒ FAST ☐
TRACTION LOW ☐ MEDIUM ☒ HIGH ☒
CARPET ☒ ASPHALT ☐

FRONT

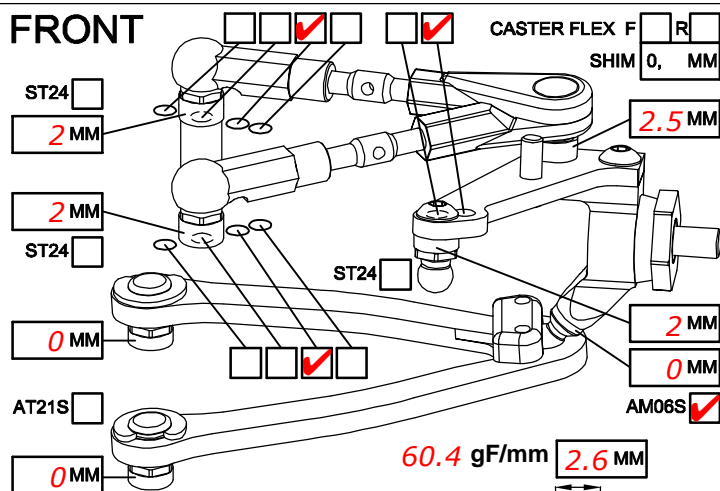


CAMBER ANGLE / ° **-2**
CASTER ANGLE / ° **4.5**
TOE ANGLE / ° **-1**
RIDE HEIGHT / MM **5.5**
DOWNSTOP / MM **6**
UPSTOP / MM

STABILIZER Ø / MM **1.2**
LOW ARM STD ☒ DAMPER #6 ☒ #3 ☐
STEERING ARM STD ☒ ACTION SYM. ☒ ASYM. ☐
WHEEL SPACER / MM **0**
SRS/RHS ARR. I ☐ II ☒
FRONT DRIVE BALL DIFF ☐ GEAR DIFF ☐ SPOOL ☒ ONE-WAY ☐
DIFF SET LOOSE ☐ MEDIUM ☐ TIGHT ☐ OIL # ☐
DOGBONE DRIVE BUSHING ☒ C-DRIVE ☐ BB ☐ EVD ☒

SHOCKS SET

SPRING STD ☐ S ☒
DAMPER #6 ☒ #3 ☐
ACTION SYM. ☒ ASYM. ☐
SRS/RHS ARR. I ☐ II ☒


REAR

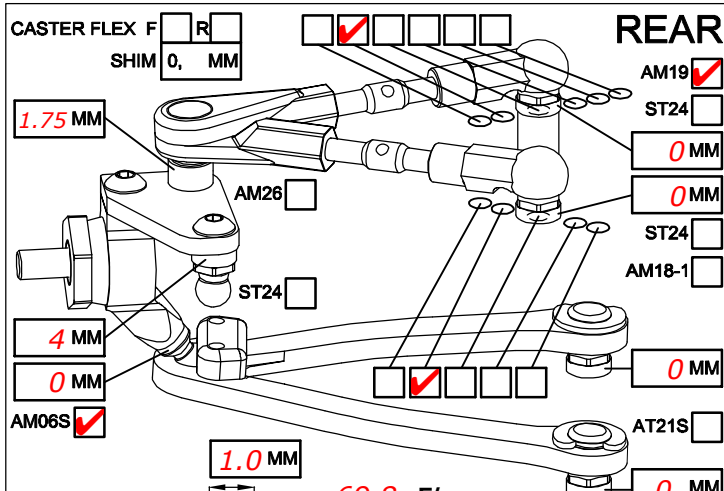

CAMBER ANGLE / ° **-2**
CASTER ANGLE / ° **0**
TOE ANGLE / ° **3**
RIDE HEIGHT / MM **5.5**
DOWNSTOP / MM **5**
UPSTOP / MM

STABILIZER Ø / MM **1.1**
LOW ARM STD ☒ DAMPER #6 ☒ #3 ☐
STEERING ARM STD ☒ ACTION SYM. ☒ ASYM. ☐
WHEEL SPACER / MM **0**
SRS/RHS ARR. I ☐ II ☒
REAR DRIVE BALL DIFF ☐ GEAR DIFF ☒
DIFF SET LOOSE ☐ MEDIUM ☐ TIGHT ☐ OIL # ☒ **2K ASC**
DOGBONE DRIVE BUSHING ☒ C-DRIVE ☐ BB ☐ EVD ☐


FRAME FLEX SETTING

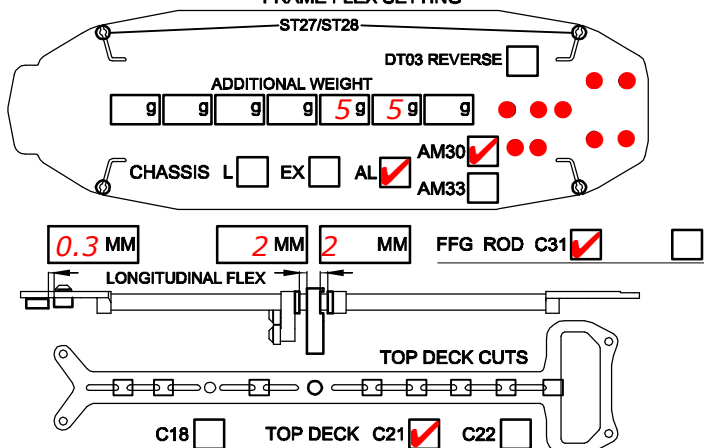

TIRES	FRONT	REAR
BRAND	Jaco	Blue
INSERTS		
WHEELS		
ADDITIVE	SXT	3.0

MOTOR LAYOUT LONG ☒ TRANS ☐ MOTOR **EAMotorsports D3.5**
SERVO LAYOUT LEFT ☒ RIGHT ☐ SERVO **Sanwa SGR-BLS**
ESC LAYOUT LEFT ☒ RIGHT ☐ ESC **ORCA VX Comp**
BAT. LAYOUT R1 ☐ R2 ☐ F1 ☐ F2 ☒ BATTERY **ORCA 7000**
SPUR PINION SD1 ☐ RECEIVER **Sanwa RX-471**
FINAL DRIVE RATIO *Wouldn't you like to know* MOTOR OFFSET / MM
BODY **LTC-R LtWt** WING **LTC-R LtWt**

STEERING POST

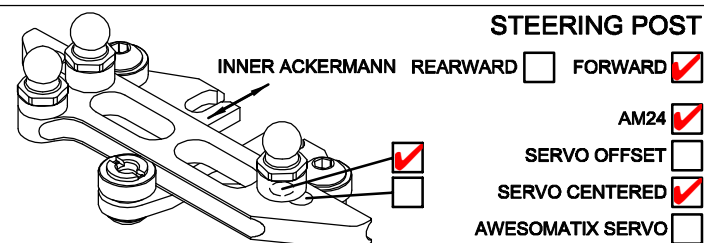

BEST LAPTIME **10.5** QUALIF. / FINAL POSITION **1 / 1**

ESC SETTING
COMMENTS / IMPRESSIONS **Top Deck Shimmed 2mm front; 4mm rear**

AM30 with only Flathead in center hole, set screw in all others; WT 1390 to balance; Lunsford titanium screws; GD2 w/ XRAY gears

CONTACT **info@awesomatixusa.com**