AWESOMATIX A800

SETUP SHEET

Alterations by Arn0 at PetitRC.com

NAME	Max Mächler
COUNTRY	Germany
RACE	RT-Pegasus Masters
TRACK	RT-Pegasus Piding

DATE 14-15.11.2015 TEMP.°C AIR / TRACK °C / °C

CARPET ☑ ASPHALT ☐

TRACK CONDITION TECHNICAL ☑ MIXED ☐ FAST ☐

TRACTION LOW ☐ MEDIUM ☑ HIGH ☐

FRONT

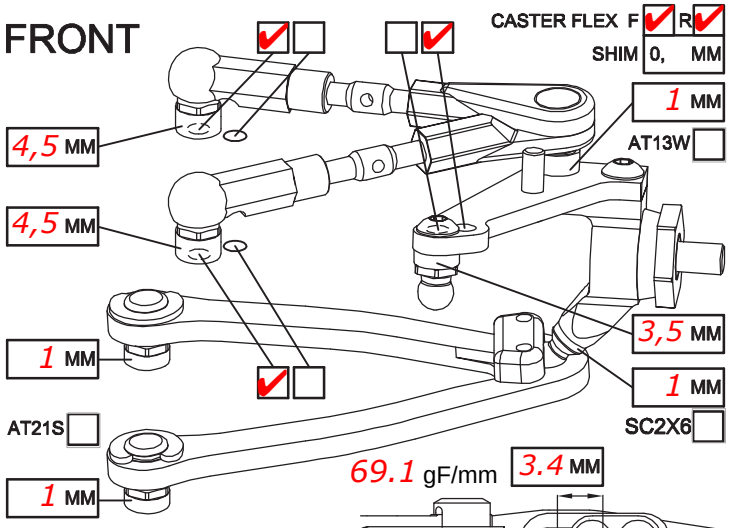

69.1 gF/mm

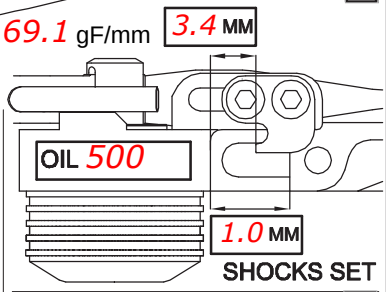

SHOCKS SET

CAMBER ANGLE / °	2
CASTER ANGLE / °	4
TOE ANGLE / °	1
RIDE HEIGHT / MM	5,2
DOWNSTOP / MM	6
UPSTOP / MM	-
STABILIZER Ø / MM	1,2
LOW ARM C04AL ☑	☐
STEERING ARM STD ☑	☐
WHEEL SPACER / MM	1mm per side

ROTOR	STD ☑		☐
SPRING	STD ☐	S	☑
DAMPER	D2.1 ☑		☐
ACTION	SYM. ☐	ASYM.	☐
SRS/RHS ARR.	I ☑	II	☐

FRONT DRIVE ☐ GD3 ☐ SPOOL ☑ GD2B ☐

DIFF OIL | DIFF WASHERS

DOGBONE DRIVE ST17-1 ☑ ST11 ☐ ST12 ☐ BB ☑ ST02 ☐

REAR

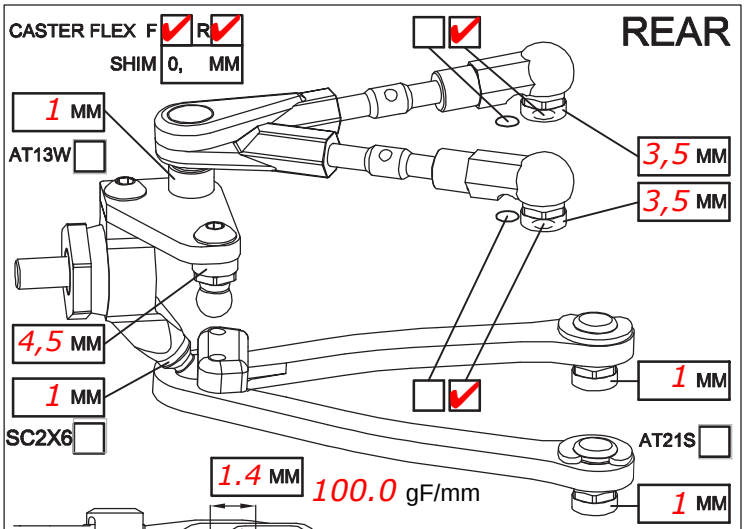

100.0 gF/mm

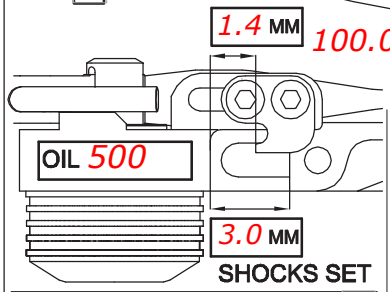

SHOCKS SET

CAMBER ANGLE / °	2
CASTER ANGLE / °	0
TOE ANGLE / °	2,5
RIDE HEIGHT / MM	5,4
DOWNSTOP / MM	4,6
UPSTOP / MM	-
STABILIZER Ø / MM	1,1
LOW ARM C04AL ☑	☐
STEERING ARM STD ☑	☐
WHEEL SPACER / MM	-

ROTOR	STD ☑		☐
SPRING	STD ☐	S	☑
DAMPER	D2.1 ☑		☐
ACTION	SYM. ☐	ASYM.	☐
SRS/RHS ARR.	I ☑	II	☐

REAR DRIVE ☐ GD3R ☐ GD2B ☑

DIFF OIL 5000 | DIFF WASHERS Std.

DOGBONE DRIVE ST11 ☐ ST12 ☐ BB ☑ ST17-1 ☐ EVD ☐

FRAME FLEX SETTING

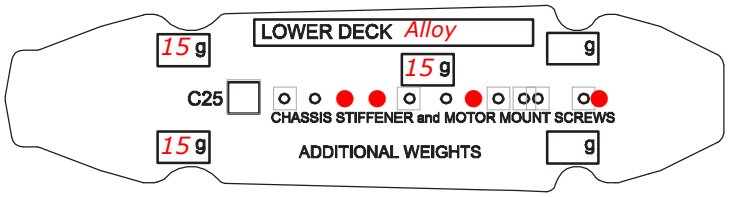

CHASSIS STIFFENER AM110 ☐ AM115 ☐ ST130 ☑

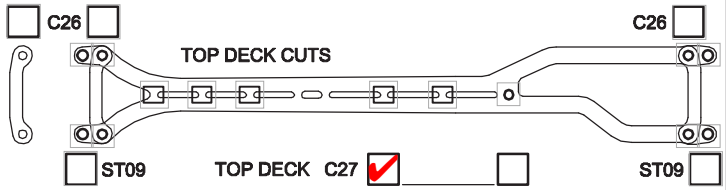

COMMENTS



TIRES	FRONT	REAR
BRAND	VOLANTE ETS	VOLANTE ETS
INSERTS		
WHEELS		
ADDITIVE	HUDY	HUDY

MOTOR LATERAL SHIFT / MM		MOTOR	MM 13,5T ETS
ACKERMANN SHIMS / MM	1	SERVO	Awesomatix
DRIVE RATIO	5,0	ESC	MM Fleta EURO
SPUR 100	PINION 38	BATTERY	LRP 5800
BODY	PF LTC-R LW	RECEIVER	Futaba
WING	Std.		

BEST LAPTIME QUALIF. / FINAL POSITION /

ESC SETTING 0-Boost

COMMENTS / IMPRESSIONS

CONTACT Max@Awesomatix.com