AWESOMATIX® **A800**

SETUP SHEET

Alterations by Arn0 at PetitRC.com

NAME	Sam Isaacs
COUNTRY	USA
RACE	2016 Roar Asphalt Nationals
TRACK	Valkaria RC

DATE 9/11/16 TEMP.°C AIR / TRACK 90°F / 130°F

CARPET ☐ ASPHALT ☑

TRACK CONDITION TECHNICAL ☐ MIXED ☑ FAST ☐

TRACTION LOW ☑ MEDIUM ☐ HIGH ☐

FRONT

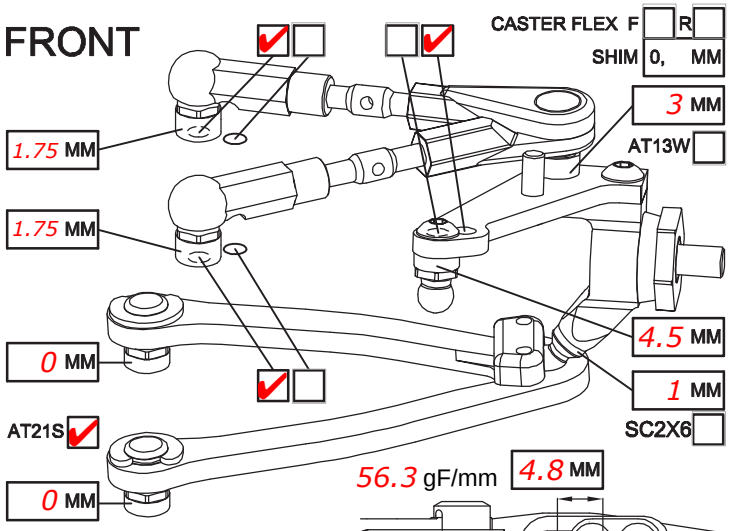

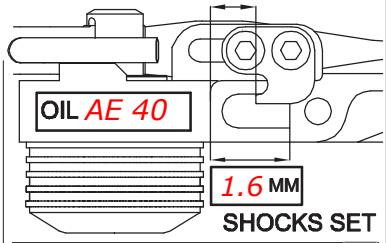

SHOCKS SET

CAMBER ANGLE / °	1.5			
CASTER ANGLE / °	4			
TOE ANGLE / °	1 out			
RIDE HEIGHT / MM	5.6mm			
DOWNSTOP / MM	1.5mm ORH			
UPSTOP / MM				
STABILIZER Ø / MM	1.2	ROTOR	STD ☑	☐
LOW ARM	C04AL ☑ ☐	SPRING	STD ☑	S ☐
STEERING ARM	STD ☑ ☐	DAMPER	D2.1 ☐	D2.2 ☑
WHEEL SPACER / MM	0	ACTION	SYM. ☐	ASYM. ☐
FRONT DRIVE	☐	SRS/RHS ARR.	I ☐	II ☑
DIFF OIL		GD3 ☐	SPOOL ☑	GD2B ☐
DOGBONE DRIVE	ST17-1 ☐ ST11 ☐ ST12 ☐ BB ☐ ST02 ☐	DIFF WASHERS		

REAR

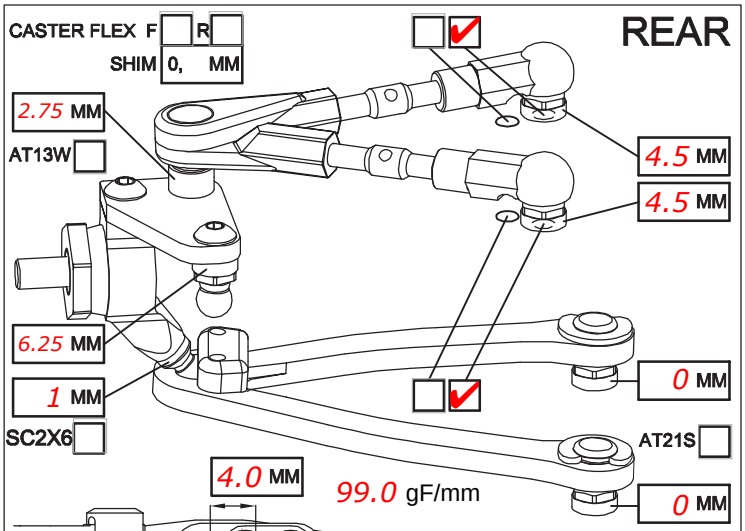

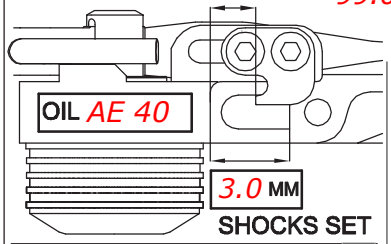

SHOCKS SET

CAMBER ANGLE / °	1.5			
CASTER ANGLE / °	4 long			
TOE ANGLE / °	2.5			
RIDE HEIGHT / MM	6.0mm			
DOWNSTOP / MM	2.5mm ORH			
UPSTOP / MM				
STABILIZER Ø / MM	1.2	ROTOR	STD ☑	☐
LOW ARM	C04AL ☑ ☐	SPRING	STD ☑	S ☐
STEERING ARM	STD ☑ ☐	DAMPER	D2.1 ☐	D2.2 ☑
WHEEL SPACER / MM	0	ACTION	SYM. ☐	ASYM. ☐
REAR DRIVE	☐	SRS/RHS ARR.	I ☑	II ☐
DIFF OIL	5000	GD3R ☐		GD2B ☑
DOGBONE DRIVE	ST11 ☐ ST12 ☐ BB ☐ ST17-1 ☐ EVD ☐	DIFF WASHERS		

FRAME FLEX SETTING

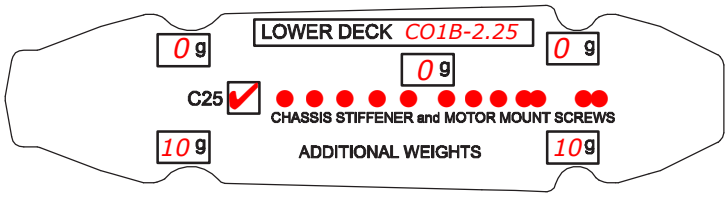

CHASSIS STIFFENER AM110 ☐ AM115 ☑ ST130 ☐

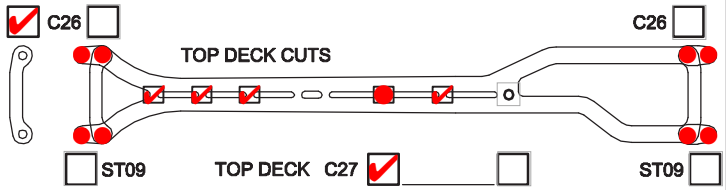

COMMENTS

Fully cut topdeck
20 grams under receiver (on far left edge),
10 in front of motor and 10 behind motor



TIRES	FRONT	REAR
BRAND	Team Powers 36	Team Powers 36
INSERTS		
WHEELS		
ADDITIVE	LG1	LG1

MOTOR LATERAL SHIFT / MM	0	MOTOR	R1 V11 17.5
ACKERMANN SHIMS / MM	0	SERVO	Sanwa Evolution V2
DRIVE RATIO	1.9	ESC	LRP Flow
SPUR 96	PINION 46	BATTERY	R1 7600 90C
BODY	IS 200-max forward	RECEIVER	Sanwa
WING	Stock		

BEST LAPTIME 13.8 QUALIF. / FINAL POSITION 1 / 1

ESC SETTING 5.4 software

COMMENTS / IMPRESSIONS

note AT21S in front and Type II front spring arrangement
Clean tires with LG1 after run. Sauce with LG1 for 15 minutes, wipe off dry and let sit for 10 minutes.

CONTACT cardriver43@aol.com