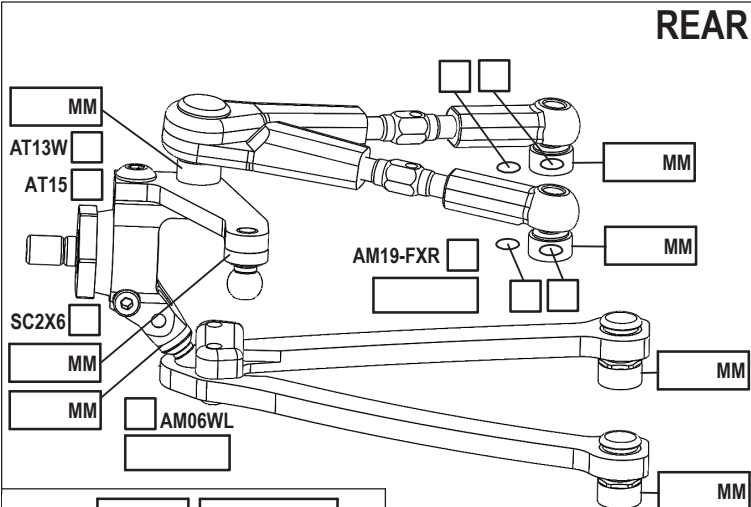


DATE		TEMP. °C	AIR / TRACK	/
TRACK SURFACE			ASPHALT ☐	CARPET ☐
TRACK LAYOUT	TECHNICAL ☐		MIXED ☐	FAST ☐
TRACTION	LOW ☐		MEDIUM ☐	HIGH ☐

REAR






Diagram of a mechanical assembly with adjustment points labeled MM, GF/MM, OIL, and a percentage dial.

ST205 ☐

ST05-R ☐

SHOCKS SETUP

DAMPER D4 ☐

ROTOR 2 HOLES ☐

SPRING STD ☐ S ☐

SRS/RHS ARR. I ☐ II ☐

PSS SETUP 30% ☐ 25% ☐ 15% ☐

DAMPING LINEAR ☐ P1 ☐ P2 ☐

DAMPER SPACER / MM


C45FXR YES ☐ NO ☐

CAMBER ANGLE / °										
CASTER ANGLE / °										
TOE ANGLE / °										
RIDE HEIGHT / MM										
DOWNSTOP / MM										
UPSTOP / MM										
ANTI-ROLL BAR Ø / MM										
ARB STIFFENER 1/4			1/2			3/4			1	
LOWER ARM EXTENSION								MM		
STEER. ARM AM23-1										
WHEEL SPACER / MM										
WHEEL BASE #1			#2			#3			#4	

The diagram illustrates the motor mount assembly with the following components and labels:

- Top Left:** 10g (four locations), TW5 (four locations), BW29 (one location), and a 10g label.
- Top Right:** BW22R (one location), AM286 (one location), and a 10g label.
- Center:** #1, #2, #3, #4 (four locations), and a 10g label.
- Bottom Left:** 10g (four locations), TW5 (four locations), BW41 (one location), and a 10g label.
- Bottom Center:** TW5 (four locations).
- Bottom Right:** AM286 (one location), and a 10g label.
- Far Right:** C128C, C128A, and C128S (three locations).

BODY POSITIONS

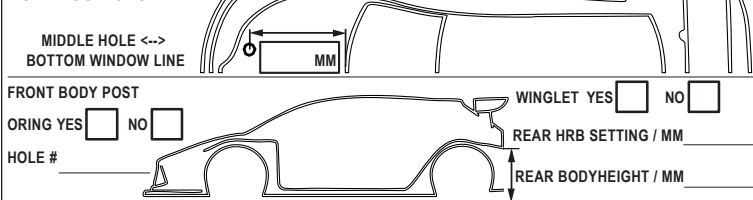

TIRES

INSERTS

SIDE WALLS GLUE Ø / MM F R

ADDITIVE

TOTAL WEIGHT

NOTES:

MOTOR LATERAL SHIFT / MM

MOTOR

SPUR

BODY

WIN

ESC

ESC SETTING

BEST LAPTIME

COMMENTS:



TIME MIN. F R

T DISTRIBUTION	% F	R
1	10	10
2	20	20
3	30	30
4	40	40
5	50	50
6	60	60
7	70	70
8	80	80
9	90	90
10	100	100

SERVO

SERVOHORN / HEIGHT

STEER TRAVEL IN OUT

BATTERY

RECEIVED

RADIO

E./FINAL POSITION /
