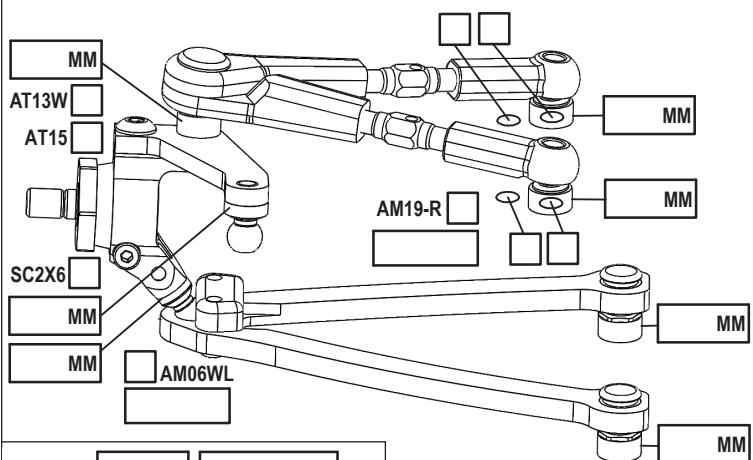


DATE	TEMP. °C	AIR / TRACK	/
TRACK SURFACE		ASPHALT ☐	CARPET ☐
TRACK LAYOUT	TECHNICAL ☐	MIXED ☐	FAST ☐
TRACTION	LOW ☐	MEDIUM ☐	HIGH ☐

REAR






Diagram of a shock absorber assembly. Labels include: MM (top left), GF/MM (top right), OIL (center), and a percentage adjustment knob (bottom right) with a label %.

ST205 ☐

ST05-R ☐

SHOCKS SETUP

DAMPER D4 ☐

ROTOR 2 HOLES ☐

SPRING STD ☐ S ☐


SRS/RHS ARR. I ☐ II ☐



PSS SETUP 30% ☐ 25% ☐ 15% ☐

DAMPING LINEAR ☐ P1 ☐ P2 ☐

DAMPER SPACER / MM

C45 YES ☐ NO ☐

		CAMBER ANGLE / ° CASTER ANGLE / ° TOE ANGLE / ° RIDE HEIGHT / MM DOWNSTOP / MM UPSTOP / MM ANTI-ROLL BAR Ø / MM ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐
ST205 ☐ ST05-R ☐	SHOCKS SETUP DAMPER D4 ☐ ROTOR 2 HOLES ☐ SPRING STD ☐ S ☐ SRS/RHS ARR. I ☐ II ☐ PSS SETUP 30% ☐ 25% ☐ 15% ☐ DAMPING LINEAR ☐ P1 ☐ P2 ☐ DAMPER SPACER / MM C45 YES ☐ NO ☐	
LOWER ARM EXTENSION / MM STEER. ARM AM23-1 ☐ 2ND SPRING SPR-P2 ☐ P1 ☐ WHEEL SPACER / MM DRIVE DIFF ☐ DRIVE POSITION DOWN ☐ UP ☐ +1 ☐ DIFF OIL ☐ DIFF SHIMS ☐		

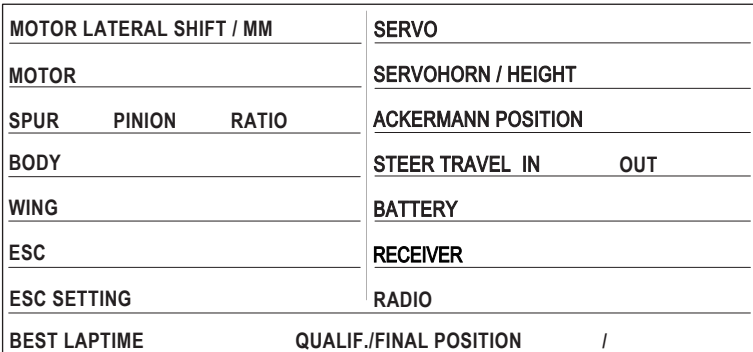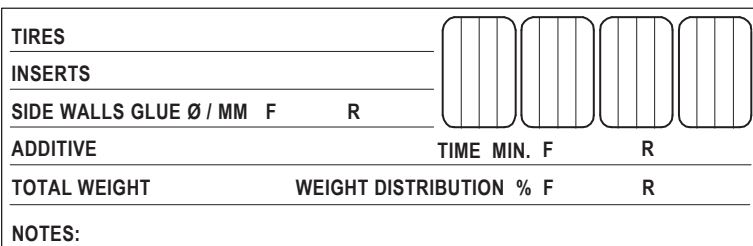

**SURFACE TO WING
MOUNT DISTANCE / MM**

