AWESOMATIX A800RR — SETUP SHEET

NAME	Dominik Schmid	DATE	29.-30.08.2026
RACE	RCK - DM	TEMP. °C AIR / TRACK	/
TRACK	EMC Marktoberdorf		
COUNTRY	Germany	CLASS	17.5T

TRACK SURFACE		ASPHALT ✓	CARPET ☐
TRACK LAYOUT	TECHNICAL ✓	MIXED ☐	FAST ☐
TRACTION	LOW ☐	MEDIUM ✓	HIGH ✓

FRONT

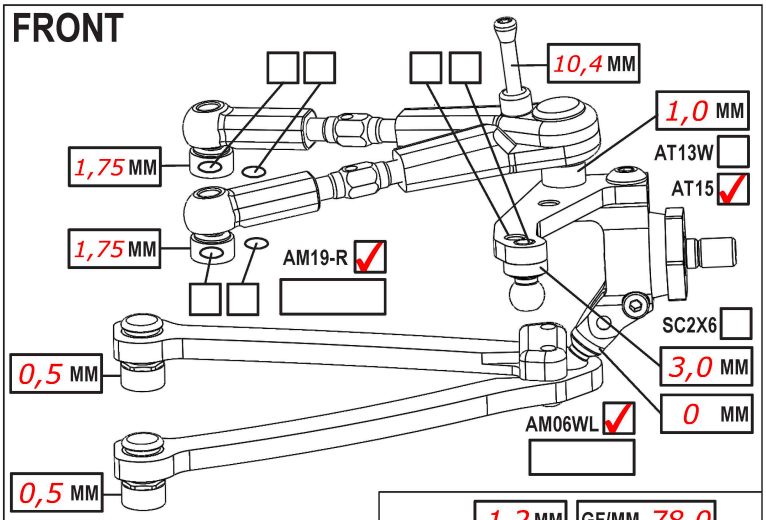

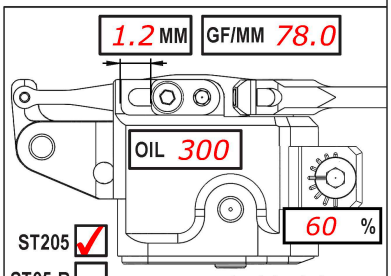

SHOCKS SETUP

CAMBER ANGLE / °	1,0
CASTER ANGLE / °	4,0
TOE ANGLE / °	1,25
RIDE HEIGHT / MM	5,0
DOWNSTOP / MM	6,0
UPSTOP / MM	on Plastic
ANTI-ROLL BAR Ø / MM	1.0
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM14LS ✓	
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	0
DRIVE SPOOL ✓ DIFF ☐	
DRIVE POSITION DOWN ✓ UP ☐ +1 ☐	
DIFF OIL	DIFF SHIMS

DAMPER D4 ✓	
ROTOR 2 HOLES ☐	
SPRING STD ✓	S ☐
SRS/RHS ARR. I ✓	II ☐
PSS SETUP 30% ✓	25% ☐ 15% ☐
DAMPING LINEAR ☐	P1 ☐ P2 ✓
DAMPER SPACER / MM	ST237
C45 YES ☐	NO ✓

REAR

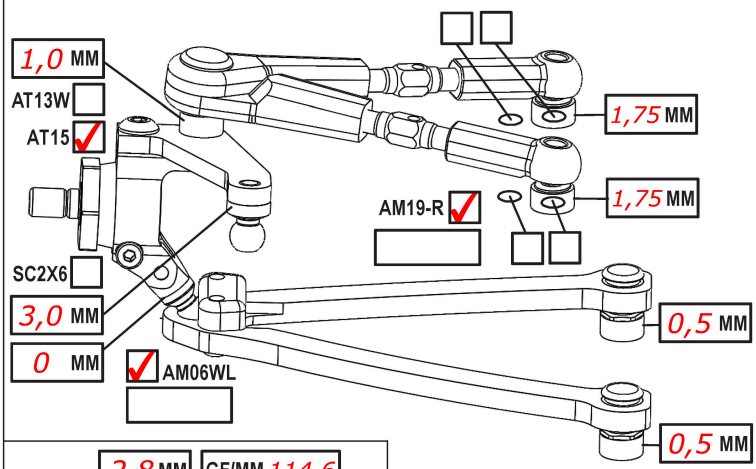

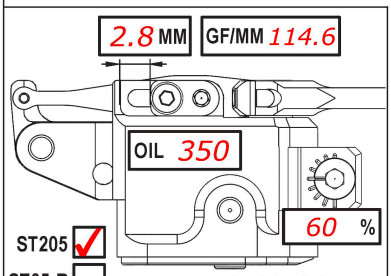

SHOCKS SETUP

CAMBER ANGLE / °	1,0
CASTER ANGLE / °	3,0
TOE ANGLE / °	2,0
RIDE HEIGHT / MM	5,2
DOWNSTOP / MM	4,8
UPSTOP / MM	on Plastic
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM23-1 ✓	
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	0
DRIVE DIFF ✓	
DRIVE POSITION DOWN ☐ UP ✓ +1 ☐	
DIFF OIL 5K	DIFF SHIMS Kit

DAMPER D4 ✓	
ROTOR 2 HOLES ☐	
SPRING STD ✓	S ☐
SRS/RHS ARR. I ✓	II ☐
PSS SETUP 30% ☐	25% ☐ 15% ☐
DAMPING LINEAR ☐	P1 ☐ P2 ✓
DAMPER SPACER / MM	ST237
C45 YES ✓	NO ☐

CHASSIS FLEX AND WEIGHT SETTINGS

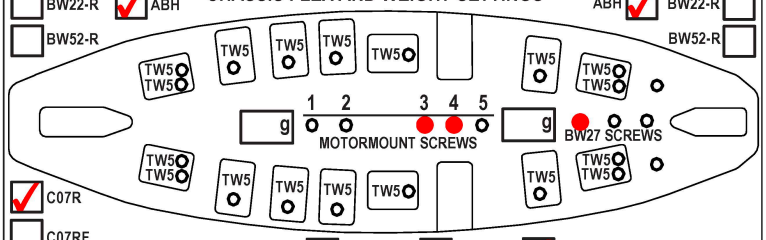

LOWER DECK C01B-RAF ☐ C01B-RC ☐ C01RS ✓ OTHER _____

☐ BUMPER TOP PLATE CUT FRONT BUMPER P15L ☐ OTHER MXLR

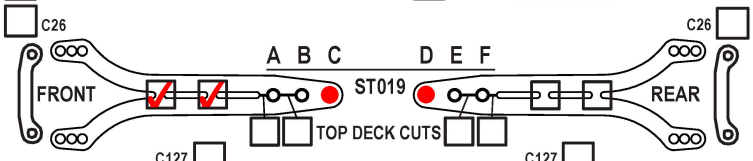

FRONT TOP DECK C127 ☐ C127S ✓ OTHER _____

REAR TOP DECK C127 ☐ C127S ✓ OTHER _____

SINGLE TOP DECK C27MMX ☐ OTHER _____ BELT TENSIONER AM279 ✓ OTHER _____

TIRES	RCK 36R
INSERTS	
SIDE WALLS GLUE Ø / MM F R	
ADDITIVE	MR33 V3
TOTAL WEIGHT	1322gr



TIME MIN. F 25 R 25

WEIGHT DISTRIBUTION % F 51 R 49

NOTES:

MOTOR LATERAL SHIFT / MM	0.5	SERVO	MKS HBL575 SL
MOTOR	RCK 17,5T V2	SERVOHORN / HEIGHT	17mm
SPUR 90 PINION 42 RATIO 4.07		ACKERMANN POSITION	Rear
BODY	Wolverine 0,4	STEER TRAVEL IN OUT	25*
WING	Wolverine 0,4	BATTERY	Team EAM 6600mah
ESC	HW XR10 Pro G3	RECEIVER	Sanwa RX481
ESC SETTING	Blinky	RADIO	Sanwa M17
BEST LAPTIME		QUALIF./FINAL POSITION	/

BODY POSITION

BOTTOM WINDOW LINE TO BODY POST DISTANCE 59 MM

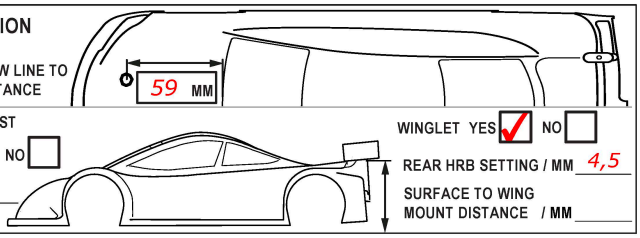

FRONT BODY POST

ORING YES ✓ NO ☐

HOLE # 3

WINGLET YES ✓ NO ☐

REAR HRB SETTING / MM 4,5

SURFACE TO WING MOUNT DISTANCE / MM _____

COMMENTS:

BW7 / BW8 / SB3x5AL