300726


AWESOMATIX A800RR

This form has been optimized for use with Adobe Acrobat.
Use of alternative PDF readers may result in formatting, display, or data entry issues.


NAME Eric Anderson
RACE 2026 MonTech NYGP
TRACK 360v2
COUNTRY United States CLASS 21.5T

DATE 18.10.2026 TEMP. °C AIR / TRACK 20 / 20
TRACK SURFACE ASPHALT ☐ CARPET ☑
TRACK LAYOUT TECHNICAL ☐ MIXED ☐ FAST ☑
TRACTION LOW ☐ MEDIUM ☑ HIGH ☑

FRONT

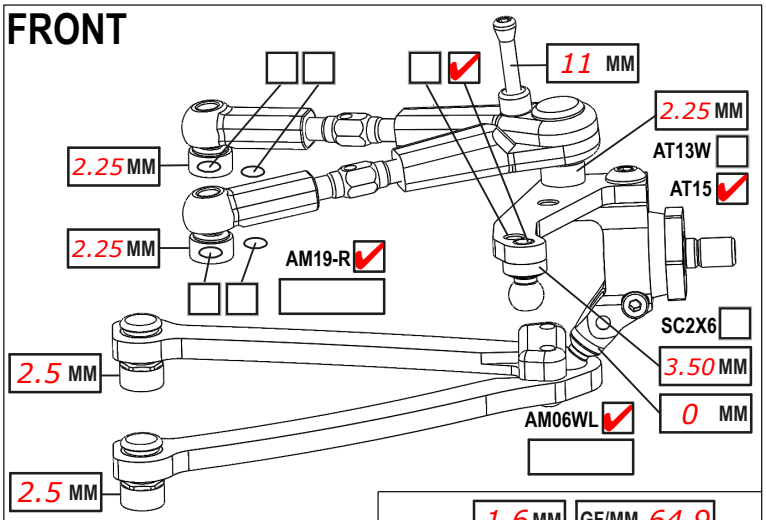


CAMBER ANGLE /° 2
CASTER ANGLE /° 4.5
TOE ANGLE /° 1.5
RIDE HEIGHT / MM 5
DOWNSTOP / MM 6.1
UPSTOP / MM 20.2
ANTI-ROLL BAR Ø / MM 1.1
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐
LOWER ARM EXTENSION / MM 0
STEER. ARM AM14LS ☐ Am14-HD
2ND SPRING SPR-P2 ☐ P1 ☐
WHEEL SPACER / MM
DRIVE SPOOL ☑ DIFF ☐
DRIVE POS. DOWN ☑ UP ☐ +1 ☐
DIFF OIL | DIFF SHIMS

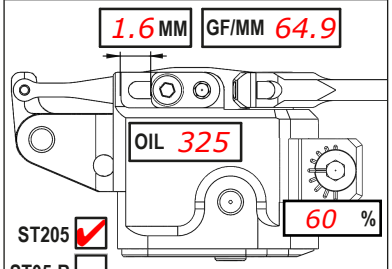


SHOCKS SETUP
DAMPER D4 ☑
ROTOR 2 HOLES ☑
SPRING STD ☐ S ☑
SRS/RHS ARR. I ☑ II ☐
PSS SETUP 30% ☐ 25% ☐ 15% ☐
DAMPING LINEAR ☑ P1 ☐ P2 ☐
DAMPER SPACER / MM 0
C45 YES ☐ NO ☑

REAR

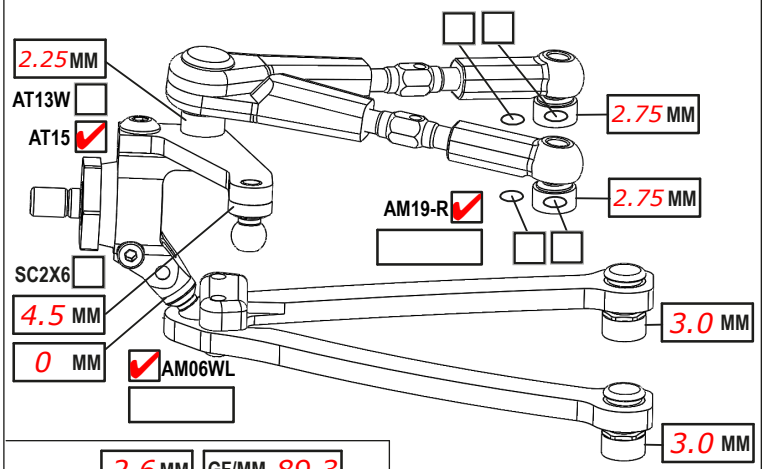


CAMBER ANGLE /° 2
CASTER ANGLE /° -2
TOE ANGLE /° 2
RIDE HEIGHT / MM 5.3
DOWNSTOP / MM 5.1
UPSTOP / MM 20.8
ANTI-ROLL BAR Ø / MM 1.1
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐
LOWER ARM EXTENSION / MM 0
STEER. ARM AM23-1 ☑
2ND SPRING SPR-P2 ☐ P1 ☐
WHEEL SPACER / MM
DRIVE DIFF ☑
DRIVE POS. DOWN ☐ UP ☑ +1 ☐
DIFF OIL 8000 | DIFF SHIMS SH5x7x0.1

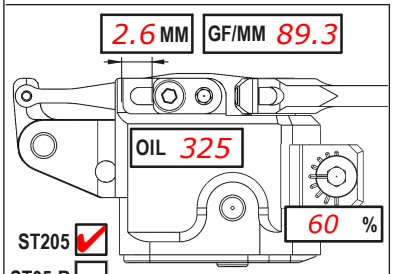


SHOCKS SETUP
DAMPER D4 ☑
ROTOR 2 HOLES ☑
SPRING STD ☐ S ☑
SRS/RHS ARR. I ☑ II ☐
PSS SETUP 30% ☐ 25% ☐ 15% ☐
DAMPING LINEAR ☑ P1 ☐ P2 ☐
DAMPER SPACER / MM 0
C45 YES ☐ NO ☑

CHASSIS FLEX AND WEIGHT SETTINGS

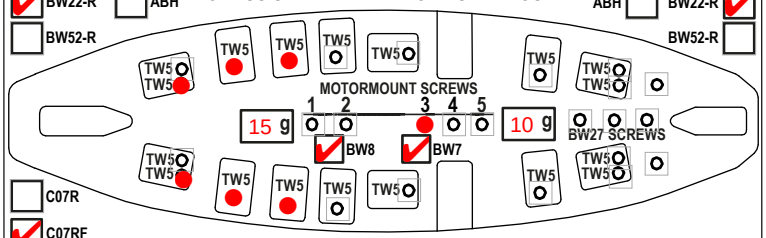

C07R ☐
C07RF ☑
LOWER DECK C01B-RAF ☐ C01B-RC ☐ C01B-RS ☐ C01B-RSL ☑ OTHER
BUMPER TOP PLATE CUT ☐ FRONT BUMPER P15L ☐ OTHER MXLR M-Flex

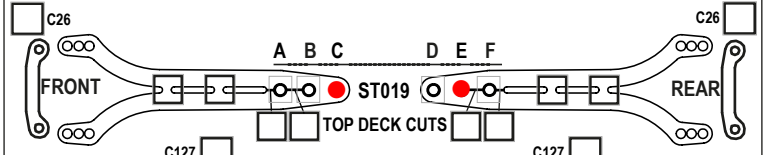


FRONT TOP DECK C127 ☐ C127S ☐ OTHER Synergy TDS-WS
REAR TOP DECK C127 ☐ C127S ☐ OTHER Synergy TDS-WS
SINGLE TOP DECK C27MMX ☐ OTHER
BELT TESIONER AM279 ☐ OTHER

TIRES Gravity Gold Handout
INSERTS
SIDEWALLS GLUE Ø / MM F 57 R
ADDITIVE SXT 3.9
TIME MIN. F 7 R 7
TOTAL WEIGHT 1301 WEIGHT DISTRIBUTION % F 50.2 R 49.8
NOTES: Completely dry tires 2min before run for fast up front laps.

MOTOR LATERAL SHIFT / MM 0
MOTOR HW G5 21.5
SPUR 90 PINION 46 RATIO 3.72
BODY Zoo racing Jackal .04
WING Jackal .04
ESC Hobbywing G3X
ESC SETTINGS Blinky
BEST LAPTIME 10.52 QUALIF./FINAL POSITION 1 / 2

SERVO Futaba
SERVO HORN / HEIGHT Hudy Alloy
ACKERMANN POSITION Full Back
STEER. TRAVEL IN 26 OUT
BATTERY EAM54150-2
RECEIVER Futaba
RADIO Futaba 10PXR

BODY POSITION

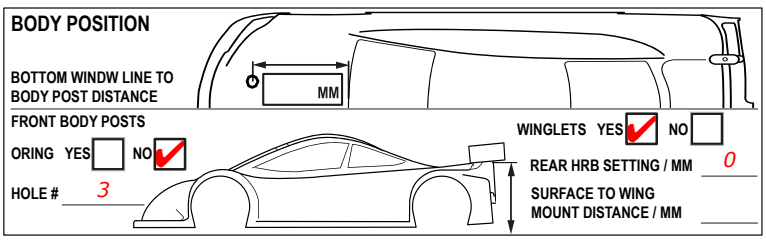

COMMENTS:
Inov8 rear body mount used in setting 2.