
AWESOMATIX A800RR


This form has been optimized for use with Adobe Acrobat.
Use of alternative PDF readers may result in formatting, display, or data entry issues.

NAME Jeff Rowland
RACE 2026 MonTech NYGP
TRACK 360v2
COUNTRY United States CLASS 21.5T

DATE 17.10.2026 TEMP. °C AIR / TRACK 74 / 84
TRACK SURFACE ASPHALT ☐ CARPET ☑
TRACK LAYOUT TECHNICAL ☐ MIXED ☐ FAST ☑
TRACTION LOW ☐ MEDIUM ☑ HIGH ☐

FRONT

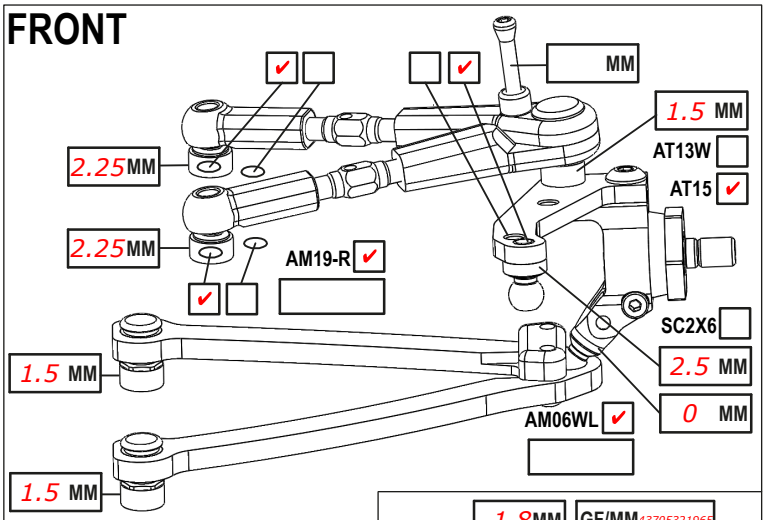


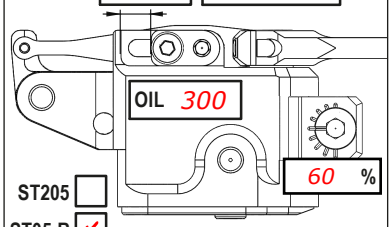


CAMBER ANGLE /°	1.75
CASTER ANGLE /°	4.0
TOE ANGLE /°	1.0
RIDE HEIGHT / MM	5.0
DOWNSTOP / MM	5.8
UPSTOP / MM	21.0
ANTI-ROLL BAR Ø / MM	1.2
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM14LS ☐	AM14H
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	0
DRIVE SPOOL ☑ DIFF ☐	
DRIVE POS. DOWN ☑ UP ☐ +1 ☐	
DIFF OIL	DIFF SHIMS

DAMPER D4	☑
ROTOR 2 HOLES	☑
SPRING STD	☐ S ☑
SRS/RHS ARR. I	☑ II ☐
PSS SETUP 30%	☐ 25% ☐ 15% ☐
DAMPING LINEAR	☐ P1 ☐ P2 ☑
DAMPER SPACER / MM	0.5mm
C45 YES	☐ NO ☑

REAR

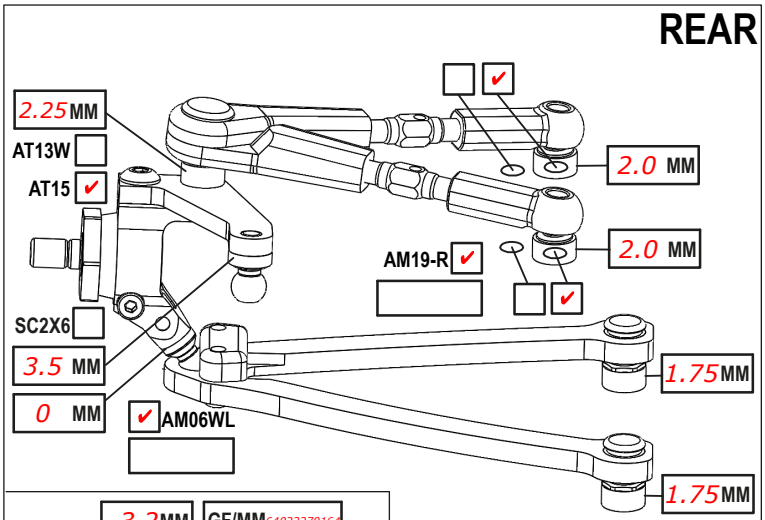


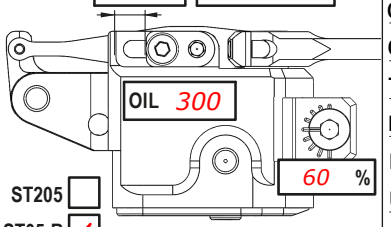


CAMBER ANGLE /°	2.01
CASTER ANGLE /°	2 short
TOE ANGLE /°	2.0
RIDE HEIGHT / MM	5.2
DOWNSTOP / MM	5.2
UPSTOP / MM	21.0
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM23-1 ☑	
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	0
DRIVE DIFF ☑	GD2B-R
DRIVE POS. DOWN ☐ UP ☑ +1 ☐	
DIFF OIL 10k	DIFF SHIMS SH5x7x0.4

DAMPER D4	☑
ROTOR 2 HOLES	☑
SPRING STD	☐ S ☑
SRS/RHS ARR. I	☑ II ☐
PSS SETUP 30%	☐ 25% ☐ 15% ☐
DAMPING LINEAR	☐ P1 ☐ P2 ☑
DAMPER SPACER / MM	0.5mm
C45 YES	☑ NO ☐

CHASSIS FLEX AND WEIGHT SETTINGS

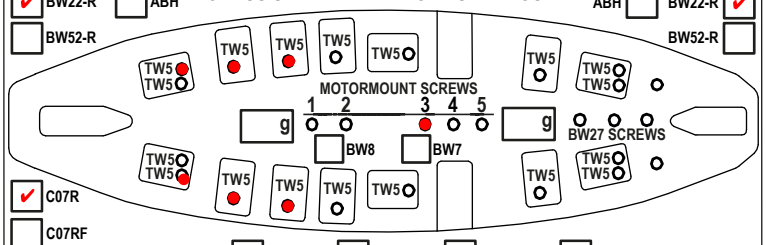


☑ BW22-R ☐ ABH ☐ BW52-R
ABH ☐ BW22-R ☑ BW52-R ☐
☑ C07R ☐ C07RF
LOWER DECK C01B-RAF ☐ C01B-RC ☐ C01B-RS ☐ C01B-RSL ☑ OTHER
☐ BUMPER TOP PLATE CUT FRONT BUMPER P15L ☐ OTHER MXLR M-Flex
☐ C26 C26 ☐



FRONT TOP DECK C127 ☐ C127S ☐ OTHER C127S-1.6
REAR TOP DECK C127 ☐ C127S ☐ OTHER C127S-1.6
SINGLE TOP DECK C27MMX ☐ OTHER
BELT TESIONER AM279 ☑ OTHER

BODY POSITION

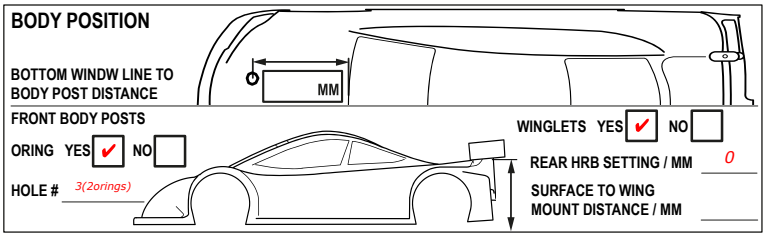

BOTTOM WINDW LINE TO BODY POST DISTANCE
FRONT BODY POSTS
ORING YES ☑ NO ☐
HOLE # 3(2orings)
WINGLETS YES ☑ NO ☐
REAR HRB SETTING / MM 0
SURFACE TO WING MOUNT DISTANCE / MM

TIRES Gravity Gold
INSERTS
SIDEWALLS GLUE Ø / MM F 0 R 0
ADDITIVE SXT 3.0
TOTAL WEIGHT 1305 WEIGHT DISTRIBUTION % F R
NOTES:

TIME MIN. F 8 R 8

MOTOR LATERAL SHIFT / MM	0	SERVO	Sanwa PGS-LH II
MOTOR	Hobbywing 21.5 G5	SERVO HORN / HEIGHT	Xray Hard Savor/17mm
SPUR 91 PINION 48 RATIO	3333333333	ACKERMANN POSITION	Back
BODY	ZooRacing Wolverine MAX 0.4	STEER. TRAVEL IN 23 OUT	
WING	Xtreme Twister 0.4	BATTERY	TeamEAM 5400 UULCG
ESC	Hobbywing XR10 Pro G3X	RECEIVER	Sanwa
ESC SETTINGS	Blinky	RADIO	Sanwa M17
BEST LAPTIME	10.328	QUALIF./FINAL POSITION	/

COMMENTS:
MR33 oils, FSS
28/5:07.926